	STRUCTURAL DETAILES								
	NUMBER OF BEAMS	POSN INT(1) EXT(2)	WIDTH BETWEEN CURB OR BARRIER (FT.)	OVERHANG WIDTH (FT.)	EDGE OF SLAB TO CURB (FT.)	HAUNCH DEPTH (IN.)	HAUNCH WIDTH (IN.)	PCT COMP IN NEG MOM AREA	DETAIL* FACTOR FOR BEAM (>1.0)
03011									
03012									

14 19 30 40 50 55 60 70 80

*Detail factor is for steel dead load only

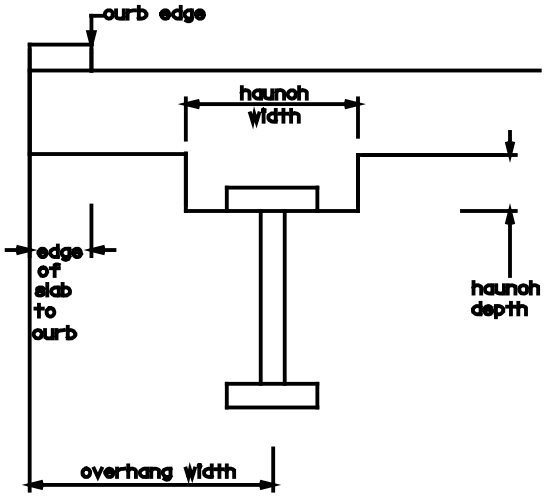

	SPAN LENGTHS									
	SPAN 1 (FT.)	SPAN 2 (FT.)	SPAN 3 (FT.)	SPAN 4 (FT.)	SPAN 5 (FT.)	SPAN 6 (FT.)	SPAN 7 (FT.)	SPAN 8 (FT.)	SPAN 9 (FT.)	SPAN 10 (FT.)
03021										
03022										

16 22 28 34 40 46 52 58 64 70

	HINGE LOCATIONS FROM EXTREME LEFT SUPPORT									
	HINGE 1 (FT.)	HINGE 2 (FT.)	HINGE 3 (FT.)	HINGE 4 (FT.)	HINGE 5 (FT.)	HINGE 6 (FT.)	HINGE 7 (FT.)	HINGE 8 (FT.)	HINGE 9 (FT.)	HINGE 10 (FT.)
03031										
03032										

17 24 31 38 45 52 59 66 73 80

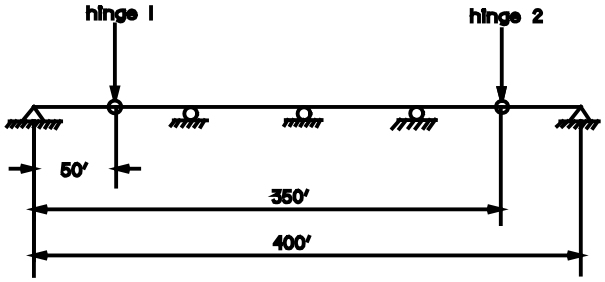

	BEAM SPACING									
	SPAN 1 (FT.)	SPAN 2 (FT.)	SPAN 3 (FT.)	SPAN 4 (FT.)	SPAN 5 (FT.)	SPAN 6 (FT.)	SPAN 7 (FT.)	SPAN 8 (FT.)	SPAN 9 (FT.)	SPAN 10 (FT.)
03041										
03042										
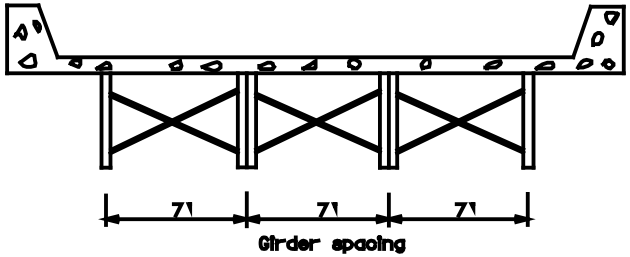
16 22 28 34 40 46 52 58 64 70