

# North Carolina Department of Transportation

## BID FORM

**WBS ELEMENTS:** 2C.074089, 2C.074094  
**COUNTY:** Pitt  
**ROUTE:** SR 1402, SR 1708  
**DESCRIPTION:** Resurfacing

**BID OPENING:** July 5, 2011

ITEM	SECT	DESCRIPTION	QTY	UNIT	UNIT PRICE	AMOUNT BID
1	800	MOBILIZATION	1	LS		
2	545	INCIDENTAL STONE BASE	100	TON		
3	607	MILLING ASPHALT 0" TO 1.5"	1000	SY		
4	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5B	3,825	TON		
5	610	ASPHALT CONC INTERMEDIATE COURSE, TYPE I 19.0B	6,322	TON		
6	620	ASPHALT BINDER FOR PLANT MIX, GRADE PG 64-22	778	TON		

***TOTAL BID FOR PROJECT:*** \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

ADDRESS \_\_\_\_\_

Federal Identification Number \_\_\_\_\_ Contractors License Number \_\_\_\_\_

Authorized Agent \_\_\_\_\_ Title \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_

Witness \_\_\_\_\_ Title \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_

**THIS SECTION TO BE COMPLETED BY NC DEPARTMENT OF TRANSPORTATION**

*This bid has been reviewed in accordance with Article 103-1 of the Standard Specifications for Roads and Structures 2006.*

***Reviewed by NCDOT*** \_\_\_\_\_ ***Date*** \_\_\_\_\_

*Contract Officer*



***Accepted by NCDOT*** \_\_\_\_\_ ***Date*** \_\_\_\_\_

*Division Engineer*

# SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LENGTH MI	WIDTH FT	INCID. MILLING SQ YDS	SURFACE COURSE, S 9.5B TONS	INTER. COURSE, I 19.0 B TONS	PG 64-22 PLANT MIX TONS
2C.074089	Pitt	1	SR 1402	BARRUS CONSTRUCT. RD FROM SR 1401 TO NC 33	1	1.1	20	0	1125	1847	190
2C.074094	Pitt	1	SR 1708	FIRETOWER RD FROM SR 2200 TO SR 1726	1	1.5	36	1000	2700	4475	460
TOTAL FOR PROJECTS						2.6		1000	3,825	6,322	650

# Typical Section

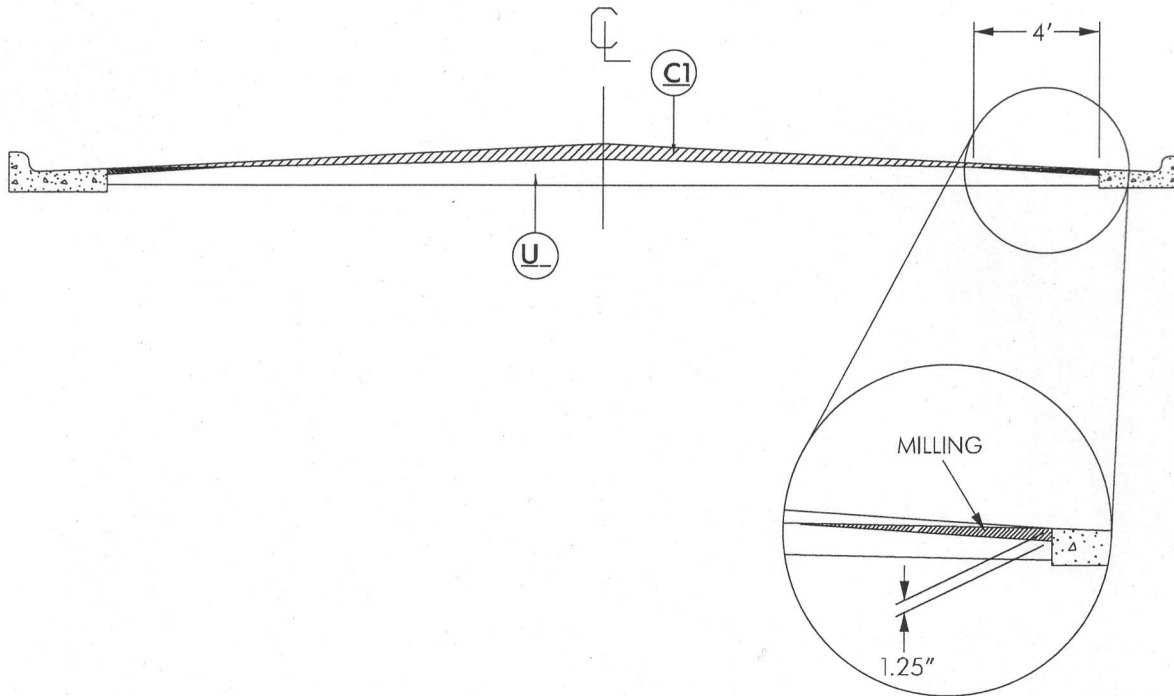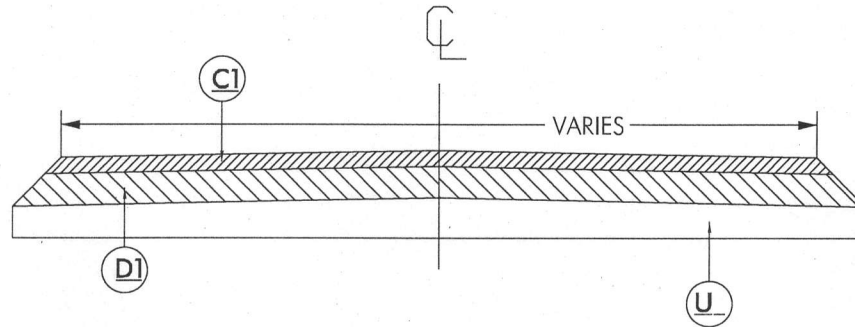

C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 280 LBS. PER SQ. YD.
U_	EXISTING PAVEMENT