STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

1-02

ENGLISH STANDARD DRAWING FOR

PAVEMENT · MARKINGS

PEDESTRIAN · CROSSWALKS

SHEET 1 OF 1

1205.07

HI-VISIBILITY CROSSWALK

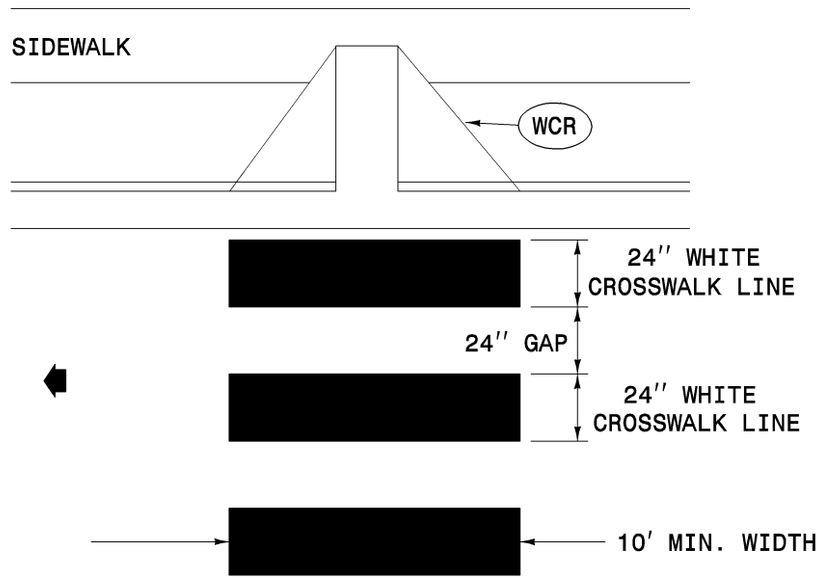

STANDARD CROSSWALK

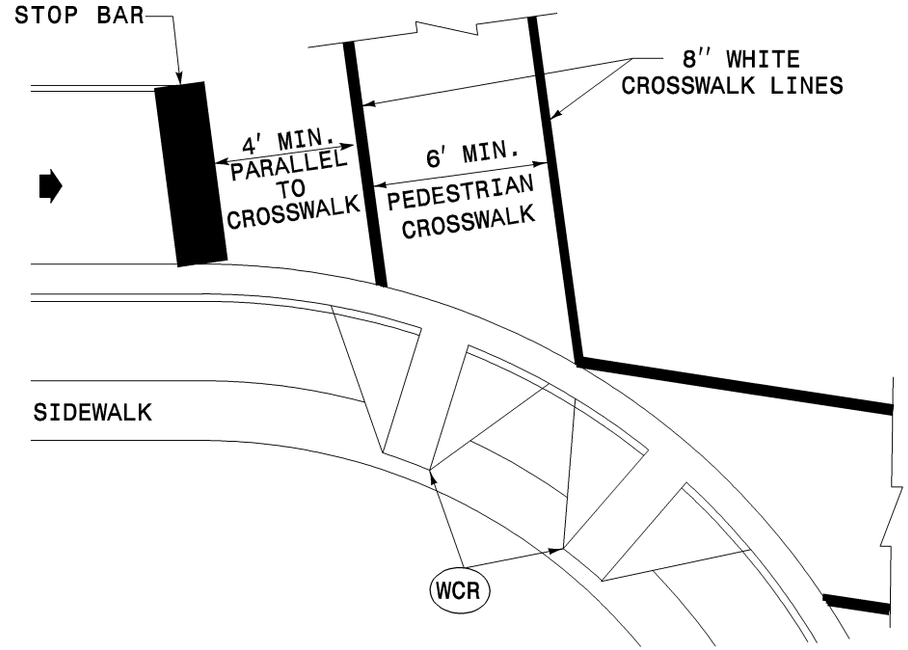

TYPICAL CROSSWALK APPLICATIONS

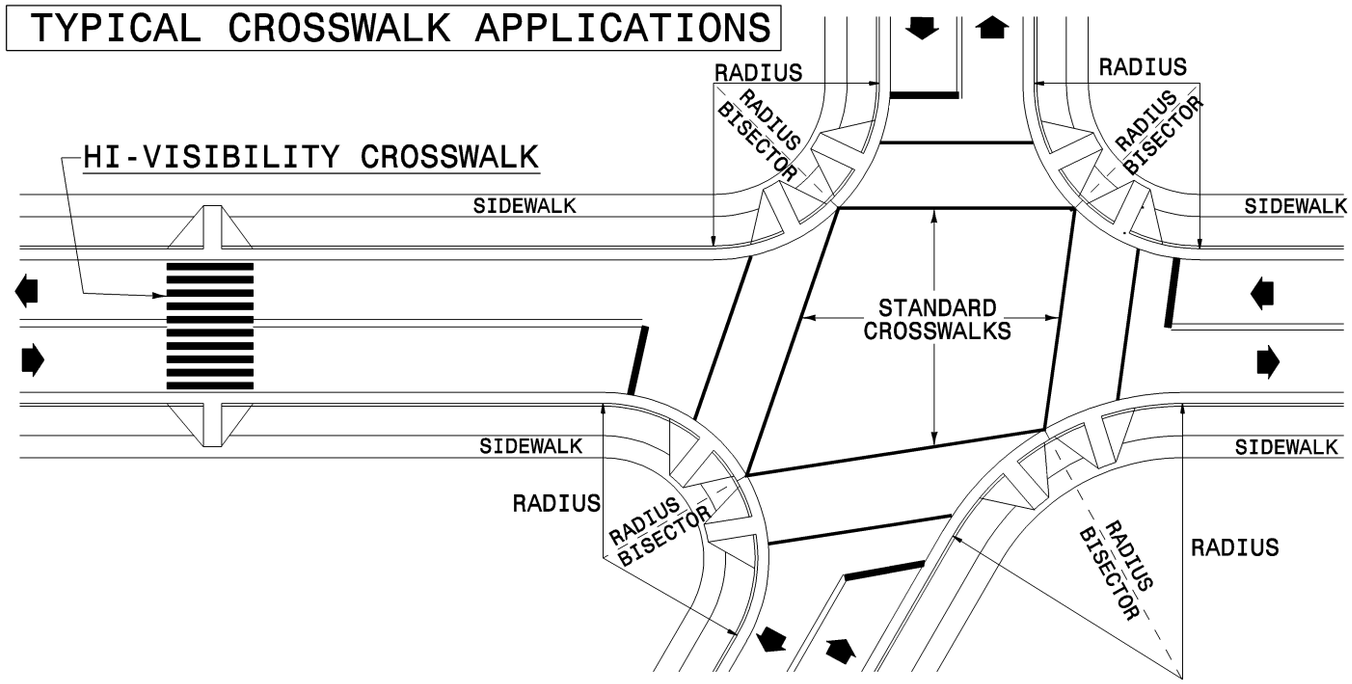

GENERAL NOTES

- THE MINIMUM WIDTH OF STANDARD CROSSWALKS IS 6 FEET. THE MINIMUM WIDTH OF HI-VISIBILITY CROSSWALKS IS 10 FEET.
- CENTER CROSSWALKS TO THEIR CORRESPONDING WHEELCHAIR RAMPS, BUT DO NOT SET THEM WITHIN THE INTERSECTION AREA ESTABLISHED BY BISECTING THE INTERSECTION RADII.
- PLACE STOP BARS A MINIMUM OF 4 FEET FROM NEAREST CROSSWALK LINE, BUT NOT WITHIN THE AREA OF A WHEELCHAIR RAMP. PLACE STOP BARS PARALLEL TO CROSSWALK LINES, BUT CAN BE PLACED PERPENDICULAR TO TRAVEL LANES.
- COORDINATE PLACEMENT OF CROSSWALKS IN ALL CASES WITH THE LOCATION OF WHEELCHAIR RAMPS.

LEGEND

DIRECTION OF TRAFFIC FLOW

WCR WHEELCHAIR RAMP

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

1-02

ENGLISH STANDARD DRAWING FOR

PAVEMENT · MARKINGS

PEDESTRIAN · CROSSWALKS

SHEET 1 OF 1

1205.07