


The North Carolina Department of Transportation

Manual For Construction Layout

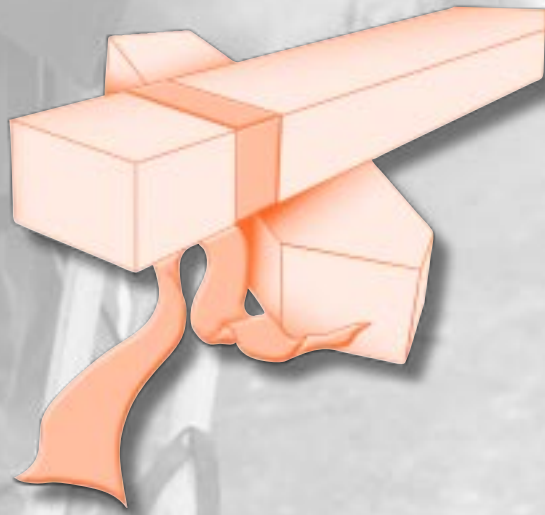

Acknowledgements

In order to establish minimum standards for construction layout and uniformity in staking procedures, the North Carolina Department of Transportation developed this Construction Layout Manual.

The Department would like to thank the many people who participated in the development of this document. A special thank you is extended to all Division Construction offices that assisted with the reviewing and editing process, and to the Location and Surveys Unit that provided information concerning the Global Positioning System (GPS).

The Manual for Construction Layout was edited and published by the North Carolina Department of Transportation – Construction Unit-IMPACT Public Information Program. If you have any comments or questions regarding this Manual, contact the Construction Unit.

Corrections Sheet

By using the corrections sheet you will help NCDOT improve future instructional material. Please read the following instructions before going any further.

INSTRUCTIONS:

1. As you use these guidelines, record mistakes and/or printing errors when you encounter them.
2. Once you have recorded any mistakes and/or printing errors, return this sheet to the address at the bottom of the page.
3. Do not use this sheet for asking questions or making comments that require a reply; please write a separate letter for such questions or comments.
4. Do not use this sheet for comments or opinions on the quality of the guidelines. An evaluation questionnaire will be made available for that purpose.

I have noted the following mistakes and/or printing errors:

Page	Paragraph	Remarks
------	-----------	---------

Use the opposite side of this page if necessary.

Please mail this sheet to:

**North Carolina Department of Transportation
Transportation Building
P.O. Box 25201
Raleigh, NC 27611
Attn: Construction Development Engineer, Construction Unit**

Preface

Contract Surveyors play an important role in constructing safe, efficient, economical and durable transportation facilities. The North Carolina Department of Transportation (NCDOT) believes the current trend of providing Prime Contractors the responsibility of surveying their own projects, will continue well into the future. By developing a standard Manual for Construction Layout, NCDOT establishes consistency in construction layout and staking procedures to be used by all department contractors. The use of these uniform procedures will result in fewer construction stakeout errors and problems resulting from such errors.

These standards and procedures were established by a technical advisory committee consisting of NCDOT and contractor personnel.

You, the Contract Surveyor, are expected to review these guidelines, consider them in the compilation of your bid and apply them to your daily surveying operations.

Introduction

The purpose of the Manual for Construction Layout is to familiarize Contract Surveyors with the standards and procedures required to survey and stake a NCDOT project. The majority of construction layout procedures encountered during a typical project are detailed within this manual. If an item is not included, contact the Resident Engineer administering the project for the appropriate procedure.

Construction Surveying is essential to completing a high quality and economical project. The Contract Surveyor is involved in construction layout at all stages of the project – from verifying initial control points through project completion. By knowing and understanding the standards and procedures for construction layout, the Contract Surveyor helps to improve the overall quality, productivity and profitability of the project.

In any successful partnership, effective communication is vital. The partnership between the Contract Surveyor and the Resident Engineer's surveying staff is no different. Everyone involved with the project must communicate effectively to increase overall understanding of both the information being established in the field and submitted for review.

NCDOT realizes that the effectiveness of this manual is an important element in the construction layout of a project. If, while surveying a department project, you develop a more efficient procedure, please submit it to the Construction Unit. We then will evaluate its viability for inclusion in the next revision of this manual. Please note that written approval should be provided by the Resident Engineer if a deviation from this manual is proposed.

Reference Materials

In addition to the Manual for Construction Layout, you should have access to the following:

- Standard Specifications for Roads and Structures
- Roadway Standard Drawings
- Project contract and plans
- Any and all revisions for the project

Table of Contents

Acknowledgements	i
Corrections Sheet	ii
Preface	iii
Introduction	iv

Chapter 1 - General Information

1.1 General Information	1
1.2 Safety	1
1.3 Required Submittals	2

Chapter 2 - Staking Control Points

2.1 General Information	5
2.2 Verifying Control Points	5
2.3 Referencing Control Points	5
2.4 Type of Stakes	6
2.5 Staking Accuracy	6

Chapter 3 - Centerline Stakes

3.1 General Information	9
3.2 Guideline Information	9
3.3 Type of Stake	9
3.4 Stake Information	9

Chapter 4 - Clearing and Grubbing

4.1 General Information	10
4.2 Guideline Information	10
4.3 Type of Stake	10
4.4 Stake Information	10

Chapter 5 - Slope Stakes

5.1 General Information	12
5.2 Guideline Information	12
5.3 Type of Stake	12
5.4 Stake Information	12

Chapter 6 - Ditch Stakes

6.1 General Information	14
6.2 Guideline Information	14
6.3 Type of Stake	14
6.4 Stake Information	14

Chapter 7 - Pipe Stakes

7.1	General Information	16
7.2	Guideline Information	16
7.3	Type of Stake	16
7.4	Stake Information	17

Chapter 8 - Minor Structure Stakes

8.1	General Information	19
8.2	Guideline Information	19
8.3	Type of Stake	19
8.4	Stake Information	20

Chapter 9 - Endwall Stakes

9.1	General Information	22
9.2	Guideline Information	22
9.3	Type of Stake	22
9.4	Stake Information	22

Chapter 10 - Intermediate Grade Stakes

10.1	General Information	25
10.2	Guideline Information	25
10.3	Type of Stake	25
10.4	Stake Information	25

Chapter 11 - Curb Stakes

11.1	General Information	26
11.2	Guideline Information	26
11.3	Type of Stake	26
11.4	Stake Information	26

Chapter 12 - Fence Line Stakes

12.1	General Information	28
12.2	Guideline Information	28
12.3	Type of Stake	28
12.4	Stake Information	28

Chapter 13 - Fine Grade Hubs

13.1	General Information	30
13.2	Guideline Information	30
13.3	Type of Stake	30
13.4	Stake Information	30

Chapter 14 - Right-of-Way Markers

14.1	Guideline Information	34
14.2	Type of Stake	34
14.3	Stake Information	34

Chapter 15 - Signs

15.1	General Information	36
15.2	Guideline Information	36
15.3	Overhead Sign Assemblies	36
15.4	Ground Mounted Signs (Type A and B)	37
15.5	Ground Mounted Signs (Type D, E and F)	37
15.6	Type of Stake	38
15.7	Stake Information	38

Chapter 16 - Major Structure Stakes

16.1	Guideline Information	43
16.2	Type of Stake	44

Chapter 17 - Cross-sections for Earthwork Quantities

17.1	General Information	51
17.2	Guideline Information	51
17.3	Type of Stake	53

Appendix	54
-----------------------	-----------



Chapter 1

General Information

1.1 General Information

Perform all construction layout in accordance with this manual, the current edition of the Standard Specifications for Roads and Structures (Section 801), and the project Contract (unless otherwise approved or directed).

Set all types of stakes at intervals of 50 feet (20 meters) unless otherwise detailed or directed. Intervals may be adjusted by the Engineer to properly construct the project.

Reference all elevations to the finished grade.

Accuracy is a degree of conformity with a standard or accepted value. According to *Definitions of Surveying and Associated Terms*, accuracy relates to the quality of a result, and is distinguished from precision which relates to the quality of the operation by which the result is obtained. The accuracy ratio shall not exceed an error of closure of 1 foot per 20,000 feet (1 meter per 20,000 meters) of perimeter for all control and structure surveys and 1 foot per 10,000 feet (1 meter per 10,000 meters) of perimeter for all other horizontal surveys. The accuracy for vertical surveys shall not exceed

$$0.05\text{ft} \cdot \sqrt{(x)\text{miles}} \quad (15.24\text{mm} \cdot \sqrt{62137(x)\text{km}})$$

for control and structure surveys, and

$$0.10\text{ft} \cdot \sqrt{(x)\text{miles}} \quad (30.48\text{mm} \cdot \sqrt{62137(x)\text{km}})$$

for all other vertical surveys. The precision for surveying each operation is detailed within this manual.

1.2 Safety

The number one concern in construction stakeout is ensuring that all work is conducted in a safe manner. Proficiency, accuracy and timeliness should never take precedence over safety of the crew and/or public. The consequences of any accident, no matter how minor, cannot be justified by the desire to complete work within a given schedule. Remember, when operating in a hazardous area, the top priority is the safety of each individual – equipment is secondary.

The stakeout crew is exposed constantly to moving vehicles and equipment on the construction site. Earthmoving equipment can dwarf a survey crew member, making it difficult for the equipment operator to see the individual standing on the ground. Therefore, one should always notify the Contractor of his/her intended area of operation and the expected time period of occupancy. Crew members should be alert for backing equipment. When one is setting stakes, it is recommended to have a standing person close by to make the operation more visible and act as the eyes of the stake driver. If working beneath a construction operation, each crew member should wear an approved safety helmet. In some cases, the Prime Contractor may require the use of safety helmets while performing work within the project limits.

When stakeout is required adjacent to active travel lanes, extreme caution should be taken to protect the crew from oncoming traffic. Each member of the crew should stay alert and watch for potential hazardous situations. In addition, the appropriate traffic control measures should be installed. (See *Figures 1.1* and *1.2*.)

The stakeout crew will be exposed to the elements, insects and some poisonous plants. Therefore, the appropriate clothing should always be worn.

1.3 Required Submittals

Submit the following information to the Engineer for review and approval.

- A printout of horizontal verification, as well as coordinates, differences and error of closure.
- A printout of vertical control verification, with benchmark location elevations, and differences from plan elevations.
- Sketch of location of newly referenced horizontal control, with text printout of coordinates, method of reference and field notes associated with referencing control.
- Description of newly established benchmarks with location, elevation and closed loop survey field notes.
- The proposed method for recording information in field books to ensure clarity and adequacy.
- All updated electronic and manuscript survey records on a monthly basis.
- Two (2) copies of all layout drawings for utility construction systems and drainage systems.
- Layout drawing for each structure and culvert.
- Computations for buildups over beams, screed grades and overhang form elevations.
- Sign S-Dimension information on an 11 ½ inch x 17 inch drawing depicting the theoretical finished section at each proposed overhead sign assembly location.
- Coordinate data showing differences between supplied baseline coordinates and field obtained GPS coordinates, including report detailing preliminary input data.
- Any proposed plan alteration to rectify a construction stakeout error, including design calculations, narrative and sealed drawings.
- Validation of right-of-way marker locations.
- Alignment of baseline for each borrow pit location.
- Detailed sketch of proposed overhead and Type A and B ground mounted sign locations along with any obstructions that may interfere with installation.

GENERAL NOTES


- 1) INSTALL SIGNING ON THE LEFT AND RIGHT SIDE OF TRAVELWAY WHEN SURVEY WORK IS BEING PERFORMED ALONG DIVIDED HIGHWAY.
- 2) ALL SIGN SPACING DIMENSIONS ARE APPROXIMATE AND MAY BE FIELD ADJUSTED AS NECESSARY.
- 3) SIGN THE SURVEY WORK OPERATION AS SHOWN, INCLUDING ALL RAMP AND -Y- LINES INTERSECTING THE MAIN SURVEY OPERATION.
- 4) THESE SIGNS ARE IN ADDITION TO ALL ADVANCE WARNINGS OTHERWISE DETAILED IN THE CONTRACT.
- 5) INSTALL LANE CLOSURE IN ACCORDANCE WITH ROADWAY STANDARD DRAWING 1101.02 IF WORK IS BEING PERFORMED CLOSER THAN 10' (3M) TO THE TRAVELWAY.
- 6) CONTACT ENGINEER FOR DIRECTION IF ROADWAY STANDARD DRAWINGS DO NOT APPLY.
- 7) DO NOT INSTALL LANE CLOSURES OF MORE THAN 2 MILES (3.2KM) IN LENGTH.
- 8) OPERATE STROBE LIGHT WHEN VEHICLE IS STOPPED ON SHOULDER. PARK VEHICLES A MINIMUM OF 10' (3M) FROM ROADWAY SHOULDER AS TO NOT OBSTRUCT THE VIEW OF SURVEY CREW OR IMPEDE THE FLOW OF APPROACHING TRAFFIC.
- 9) PLACE AN OBSERVER, AS NEEDED, OR AT THE DISCRETION OF THE ENGINEER.
- 10) UTILIZE FLAGGERS WHEN SURVEY WORK IS WITHIN 10' (3M) OF -Y- LINES OR RAMP.
- 11) ALL SURVEY CREW OPERATION SIGNING MAY BE OMITTED WHEN ALL VEHICLES, EQUIPMENT, AND/OR PERSONNEL ARE NOT WITHIN 30' OF THE TRAVELWAY.

LEGEND

- VEHICLE WITH STROBE LIGHT OPERATING
- PORTABLE SIGN
- DIRECTION OF TRAFFIC FLOW

SURVEY CREW OPERATION WITHIN A WORK ZONE ON MULTILANE DIVIDED HIGHWAYS

WHEN WORKING BETWEEN 10' (3M) - 30' (6M) FROM EDGE OF TRAVELWAY

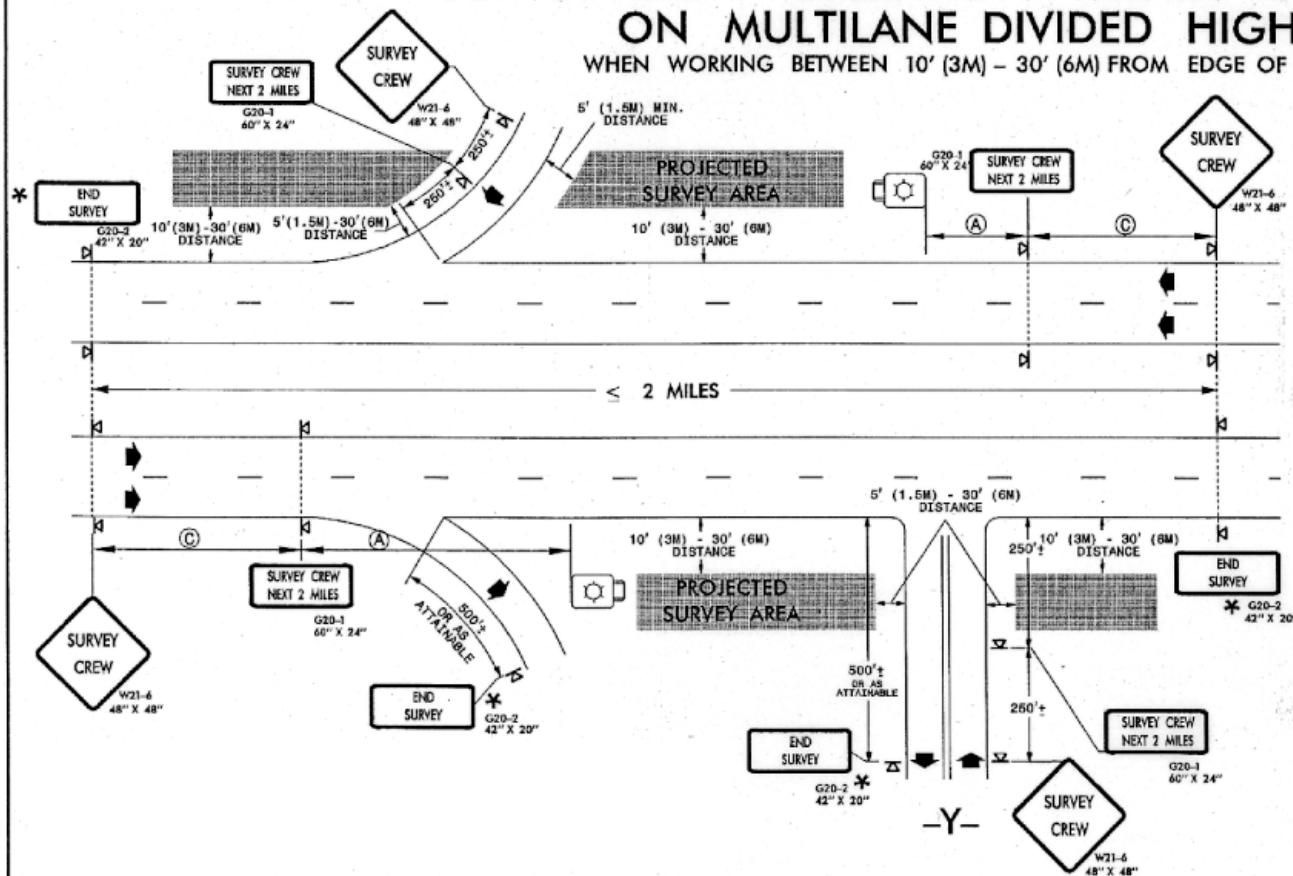

*PLACE "END SURVEY" (G20-2) SIGNS ONLY WHEN SURVEY CREW OPERATION EXTENDS BEYOND THE "END WORK ZONE" (G20-2C) SIGN OF THE EXISTING WORKZONE

ADVANCE WARNING SIGN SPACING CHART

POSTED SPEED LIMIT (MPH)	RECOMMENDED DISTANCE BETWEEN SIGNS (FEET) ^a	
	(A)	(C)
≤ 35	200	200
40-50	350	350
55	500	500
CONTROLLED ACCESS ROADS (≥ 55)	1000	2600

DRAWING NUMBER ##
IMPLEMENTATION DATE:
REVISED: 11/06/00

Figure 1.1

GENERAL NOTES


- 1) ALL SIGN SPACING DIMENSIONS ARE APPROXIMATE AND MAY BE FIELD ADJUSTED AS NECESSARY.
- 2) SIGN THE SURVEY WORK OPERATION AS SHOWN, INCLUDING ALL -Y- LINES INTERSECTING THE MAIN SURVEY OPERATION.
- 3) THE SIGNS SHOWN IN THIS DRAWING ARE IN ADDITION TO ALL ADVANCE WARNINGS OTHERWISE DETAILED IN THE CONTRACT.
- 4) INSTALL LANE CLOSURE IN ACCORDANCE WITH ROADWAY STANDARD DRAWING 1101.02 IF WORK IS BEING PERFORMED CLOSER THAN 5' (1.5M) TO THE TRAVELWAY.
- 5) CONTACT ENGINEER FOR DIRECTION IF ROADWAY STANDARD DRAWINGS DO NOT APPLY.
- 6) DO NOT INSTALL LANE CLOSURES OF MORE THAN 2 MILES (3.2KM) IN LENGTH.
- 7) OPERATE STROBE LIGHT WHEN VEHICLE IS STOPPED ON SHOULDER. PARK VEHICLES A MINIMUM OF 10' (3M) FROM ROADWAY SHOULDER AS TO NOT OBSTRUCT THE VIEW OF SURVEY CREW OR IMPEDE THE FLOW OF APPROACHING TRAFFIC.
- 8) PLACE AN OBSERVER, AS NEEDED, OR AT THE DISCRETION OF THE ENGINEER.
- 9) UTILIZE FLAGGERS WHEN SURVEY WORK IS WITHIN 10' (3M) OF -Y- LINES.
- 10) ALL SURVEY CREW OPERATION SIGNING MAY BE OMITTED WHEN ALL VEHICLES, EQUIPMENT, AND/OR PERSONNEL ARE NOT WITHIN 30' OF THE TRAVELWAY.

LEGEND

- VEHICLE WITH STROBE LIGHT OPERATING
- PORTABLE SIGN
- DIRECTION OF TRAFFIC FLOW

SURVEY CREW OPERATION WITHIN A WORK ZONE ON UNDIVIDED HIGHWAYS

WHEN WORKING BETWEEN 5' (1.5M) - 30' (6M) FROM EDGE OF TRAVELWAY

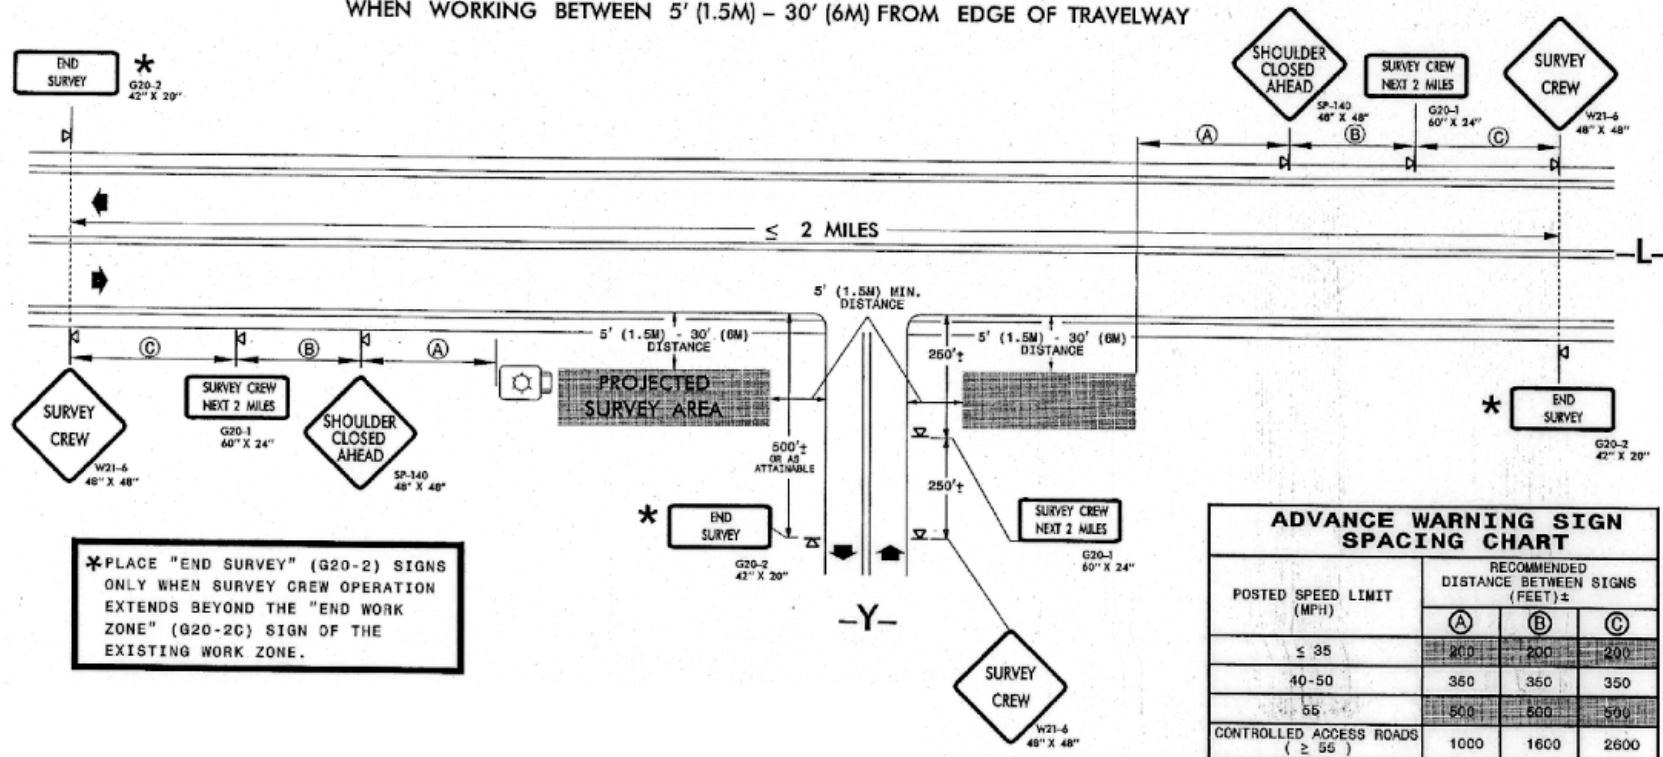

DRAWING NUMBER ##
IMPLEMENTATION DATE:
REVISED: 11/06/00

Figure 1.2



Chapter 2

Staking Control Points

2.1 General Information

The initial control is the foundation from which the entire project will be surveyed. Therefore, it is critical to establish accurate control. The Department strives to provide accurate baseline control. The expectation is that the Contract Surveyor will easily be able to verify the Department's control within the specified accuracy, and will preserve such accuracy in referencing the control outside the project limits.

2.2 Verifying Control Points

Horizontal Control

Verify the Department's horizontal control by performing a closed traverse of the baseline control points. All baseline control points should be occupied. Notify the Engineer in writing of any discrepancies in the horizontal control. The Engineer should provide written direction before control points, which do not validate within the specified accuracy, are utilized.

Submit to the Engineer a printout of the control verification, as well as coordinates, differences and error of closure.

Vertical Control

Verify the Department's vertical control by performing a closed loop survey utilizing differential leveling. Notify the Engineer, in writing, of any discrepancies in the vertical control.

Submit to the Engineer a printout of all benchmarks with locations, elevations and differences from plan elevations.

2.3 Referencing Control Points

Horizontal Control

Approved methods for referencing horizontal control points shall include a minimum of three (3) points and one (1) angle. An offset baseline traverse is an approved method for referencing horizontal control. (See *Figure 2.1*.)

Submit to the Engineer a sketch showing location of new control, a text printout of coordinates, the method of reference and the field notes associated with referencing control.

Vertical Control

An approved method for referencing vertical control is to establish a new benchmark by performing a closed loop survey utilizing differential leveling.

Submit to the Engineer a description of the new benchmark, location, elevation and closed loop survey field notes. (See *Figure 2.2*.)

2.4 Type of Stakes

Recommended

Stake Size: 60D nail or 18" #5 rebar for horizontal control point
¾" x 1 ¾" x 36" for guard stake

Railroad spike may be used for vertical control or other approved points. A paint mark will not be acceptable. A ¾" x 1 ¾" x 18" stake should accompany the benchmark with the elevation information legibly written upon it.

2.5 Staking Accuracy

Horizontal Control

The accuracy ratio shall not exceed an error of closure of 1 foot per 20,000 feet (1 meter per 20,000 meters) of perimeter (1:20,000).

Vertical Control

The error of closure shall not exceed $0.05\text{ft} \cdot \sqrt{(x)\text{miles}}$ ($15.24\text{mm} \cdot \sqrt{62137(x)\text{km}}$).

METHODS OF REFERENCING HORIZONTAL CONTROL


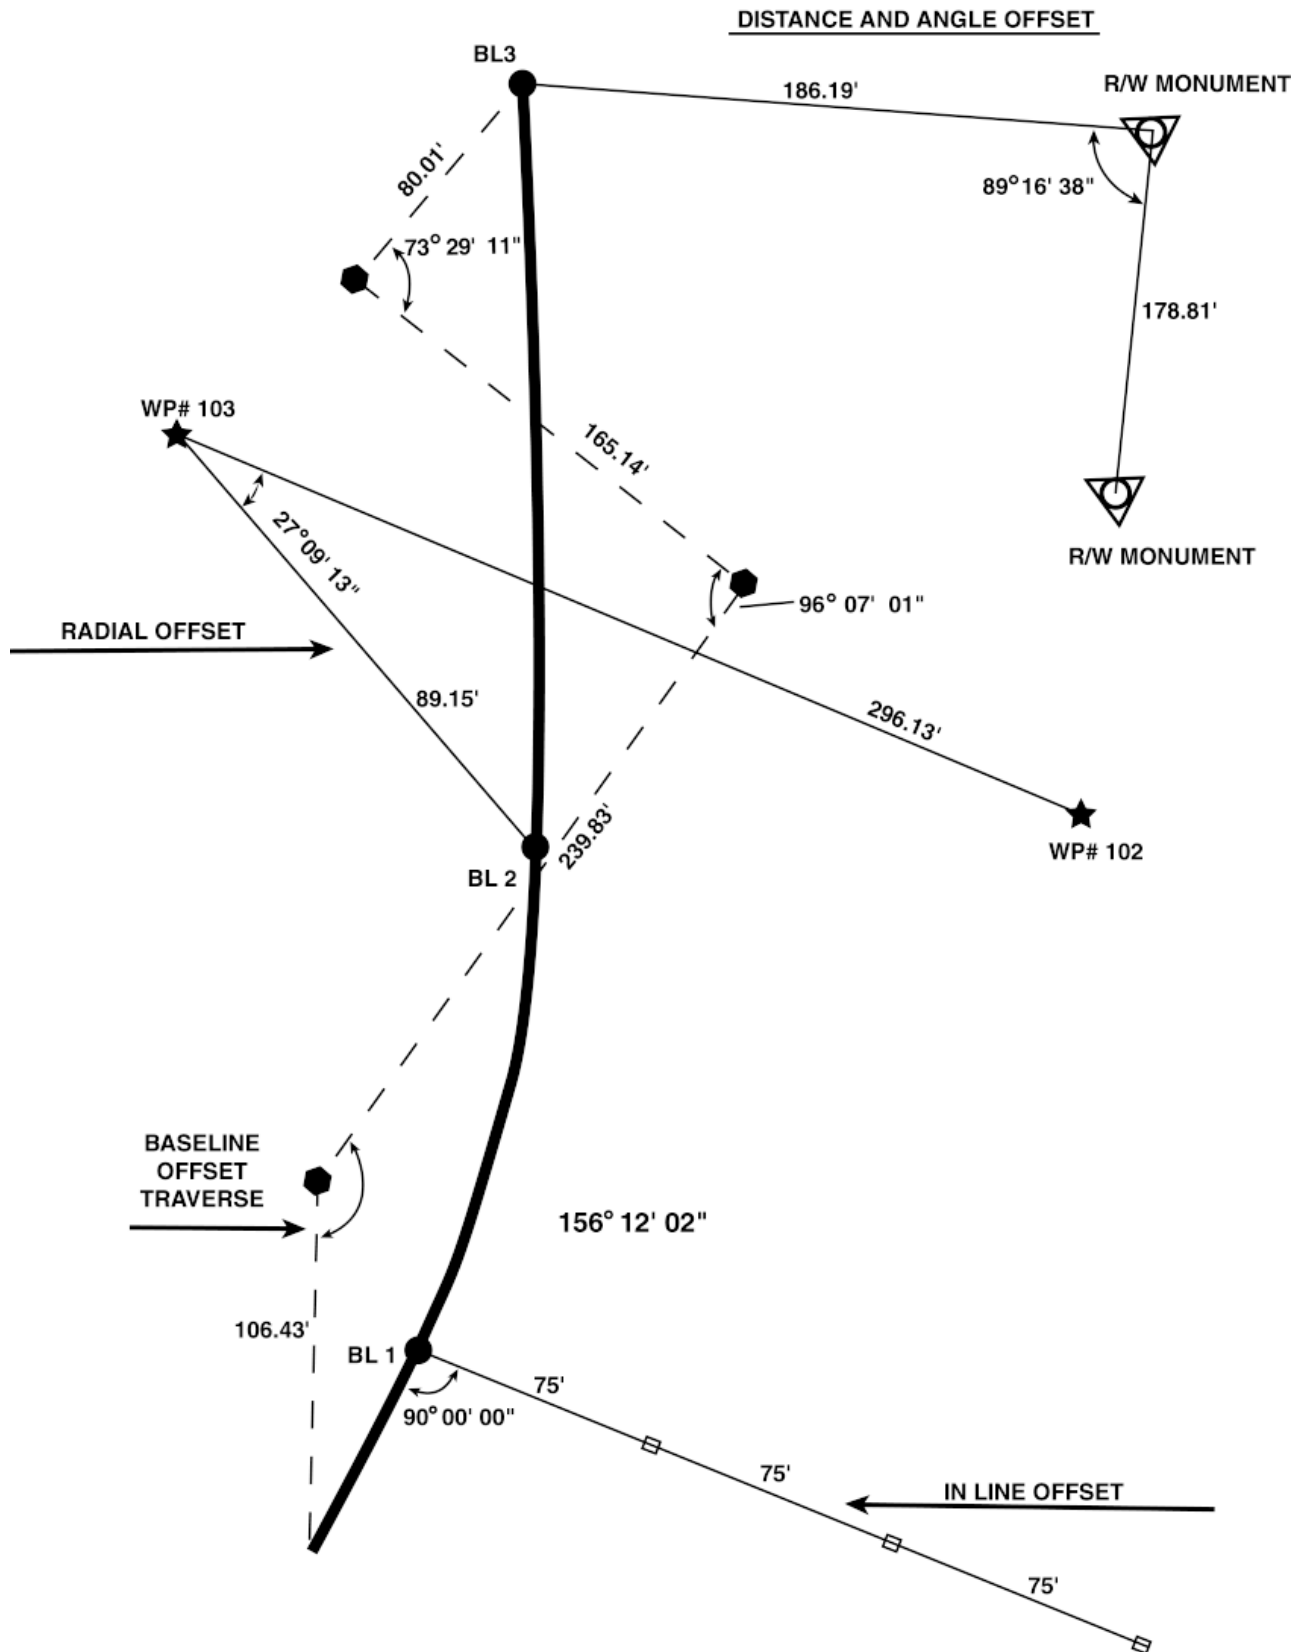


Figure 2.1

Referencing Horizontal Control

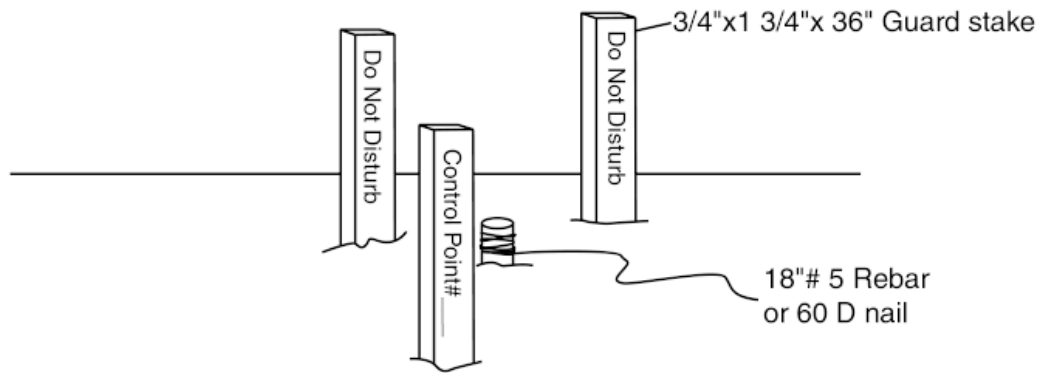

Referencing Vertical Control

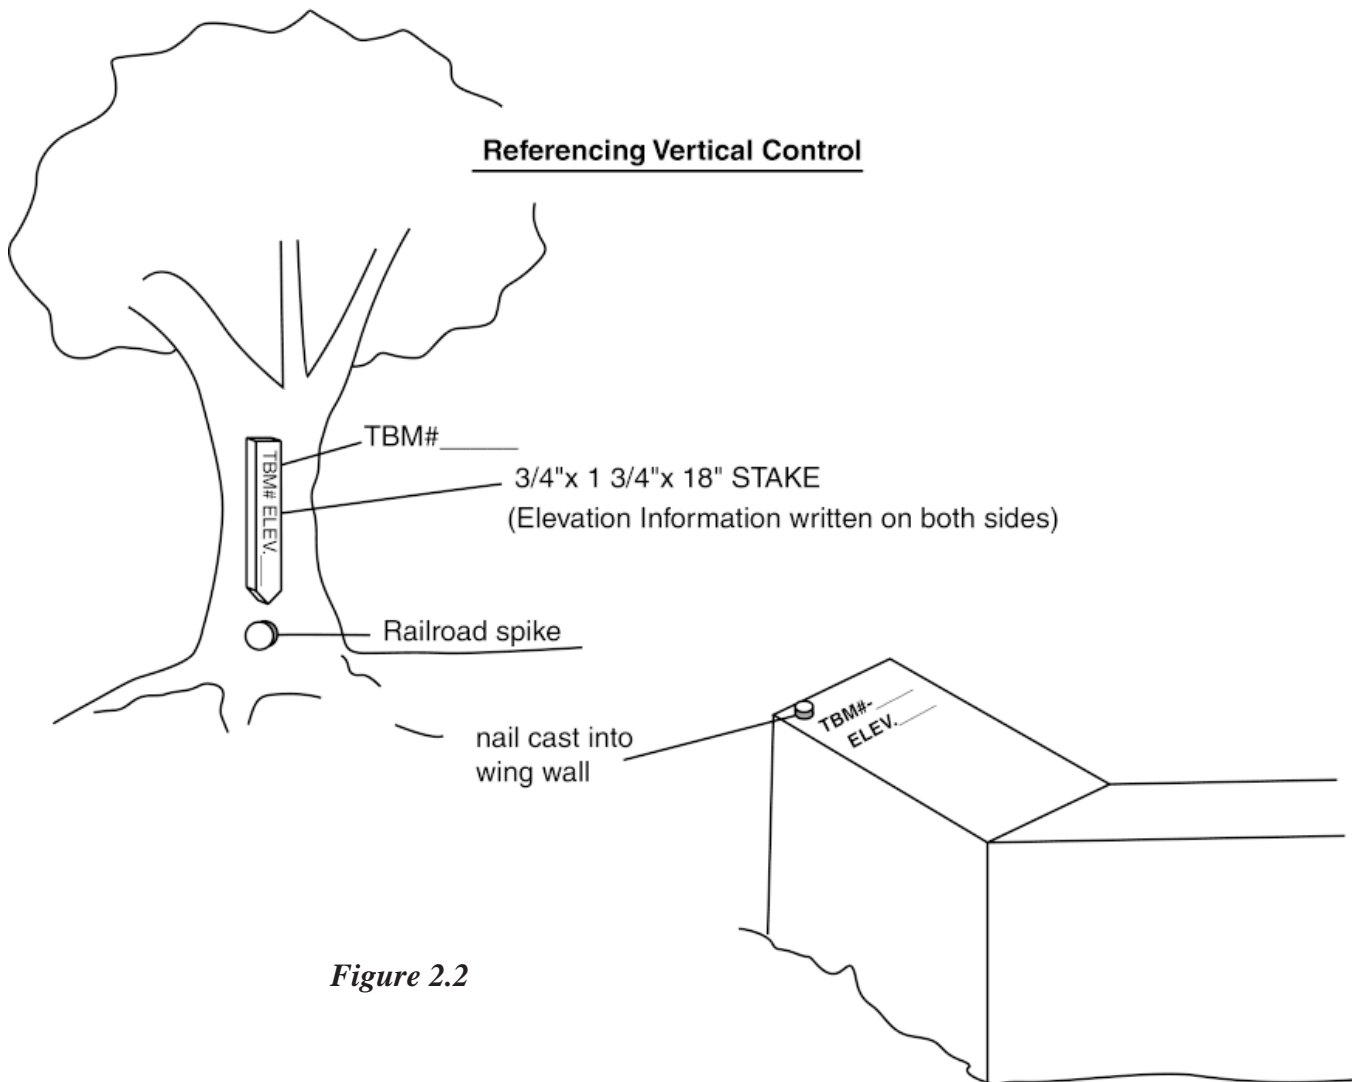


Figure 2.2



Chapter 3

Centerline Stakes

3.1 General Information

With today's technology and the use of baseline surveys, the need to install centerline stakes has diminished. However, there are different types of projects across North Carolina which, for various reasons, may require the installation of centerline stakes. If the centerline is inaccessible, an offset line may be required. Centerline stakes typically will be installed for measurement of earthwork quantities on the project and in borrow pits or for establishing the initial control for a future project.

3.2 Guideline Information

Set centerline stakes at 50 foot (20 meter) intervals, including all cardinal points (TS, SC, CS, SC, equalities, etc.).

3.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 18"

Recommended Flagging: Orange

Precision: Horz. 0.1'

Stake Use: Location and Information

3.4 Stake Information

The information described below is detailed in *Figure 3.1*.

1. Station number
2. Offset (if necessary)
3. Designation of alignment

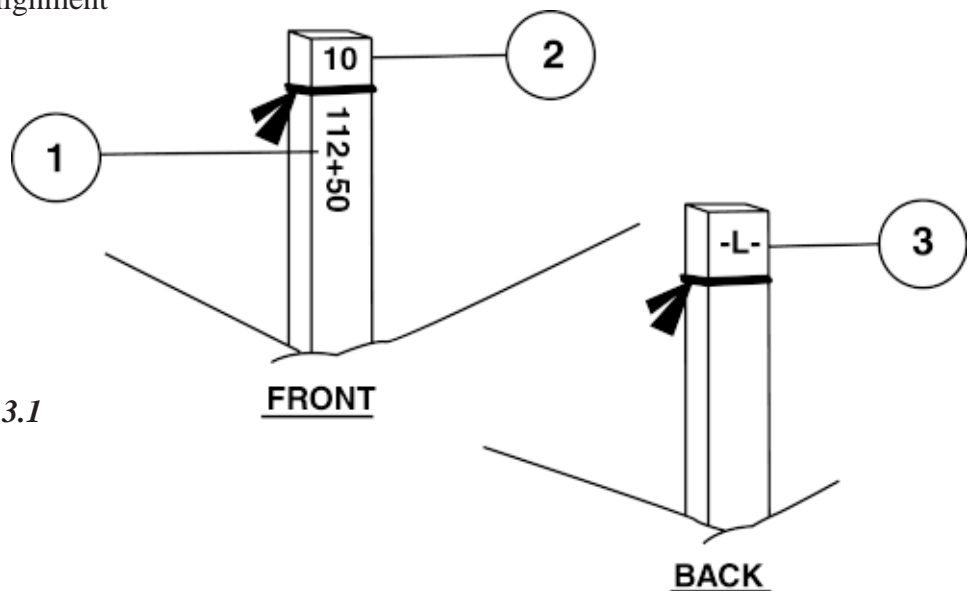


Figure 3.1



Chapter 4

Clearing and Grubbing

4.1 General Information

One of the initial operations on a new project is to establish the limits for clearing and grubbing, which prepares the project for grading within the construction limits.

4.2 Guideline Information

Utilize Erosion Control Plans, Standard Drawings, Roadway Plans and Project Cross-Sections in establishing clearing limits. In critical areas – such as wetlands, condemned parcels and any other areas deemed necessary by the Engineer – install slope stakes prior to establishing clearing limits. Flagging tape may be tied on stable trees to supplement the clearing stakes. Retain the clearing stakes throughout the clearing and grubbing operation.

4.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 36"

Recommended Flagging: Blue and White Striped

Precision: Horz. 1.0' unless slope staking is required, then Horz. 0.1'

Stake Use: Location

4.4 Stake Information

The information described below is detailed in *Figure 4.1*.

1. Denotes type of stake (clearing limits)
2. Station

CLEARING LIMITS

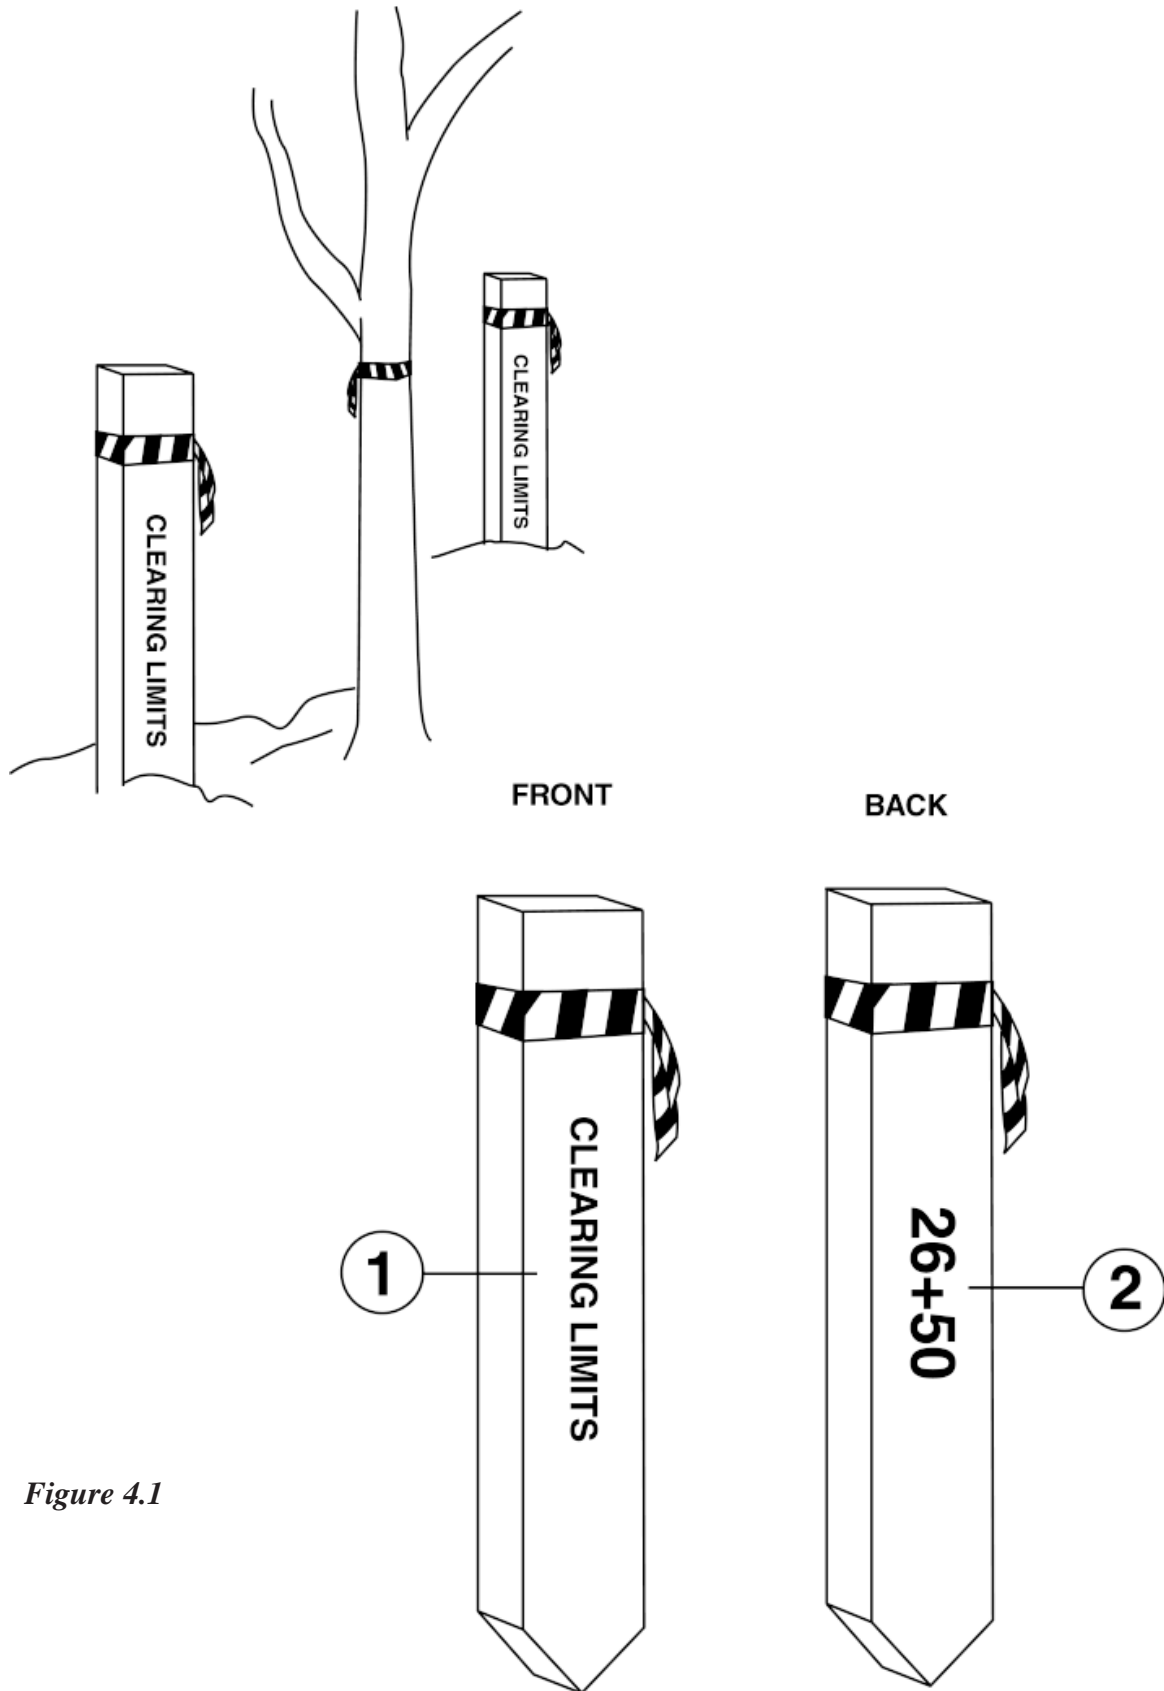


Figure 4.1



Chapter 5

Slope Stakes

5.1 General Information

Before beginning earthwork construction, the extremities of the cuts and fills must be identified for equipment operators. Slope stakes establish the intersection of either the top of cut or the toe of fill with the natural ground. They also reference the centerline location and quantify the depth of material to be excavated or placed. Slope stakes should remain in place until the slopes are completed, inspected and permanently seeded.

5.2 Guideline Information

Install slope stakes with a minimum offset distance of 10 feet (3 meters). Slope stakes shall not be scaled from the plans or determined from plan cross sections. Instead, they should be determined mathematically in the field prior to grading operations.

If a hinge point is detailed, set the slope stake to the hinge point. Otherwise, set the slope stake to the shoulder point or ditchline.

5.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 18"

Recommended Flagging: Orange

Precision: Horz. 0.1', Vert. 0.1'

Stake Use: Information and Location

5.4 Stake Information

The information described below is detailed in *Figure 5.1*.

1. Offset distance (horizontal distance between catch point and slope stake)
2. Total fill or cut from the base point to intercept point with natural ground
3. Total horizontal distance of slope
4. Rate of slope
5. Total distance from centerline to intercept point
6. Offset difference (+, -)
(vertical difference between intercept point and offset stake point)
 - + offset stake point higher than intercept point
 - offset stake point lower than intercept point
7. Station number
8. Superelevation

SLOPE STAKE

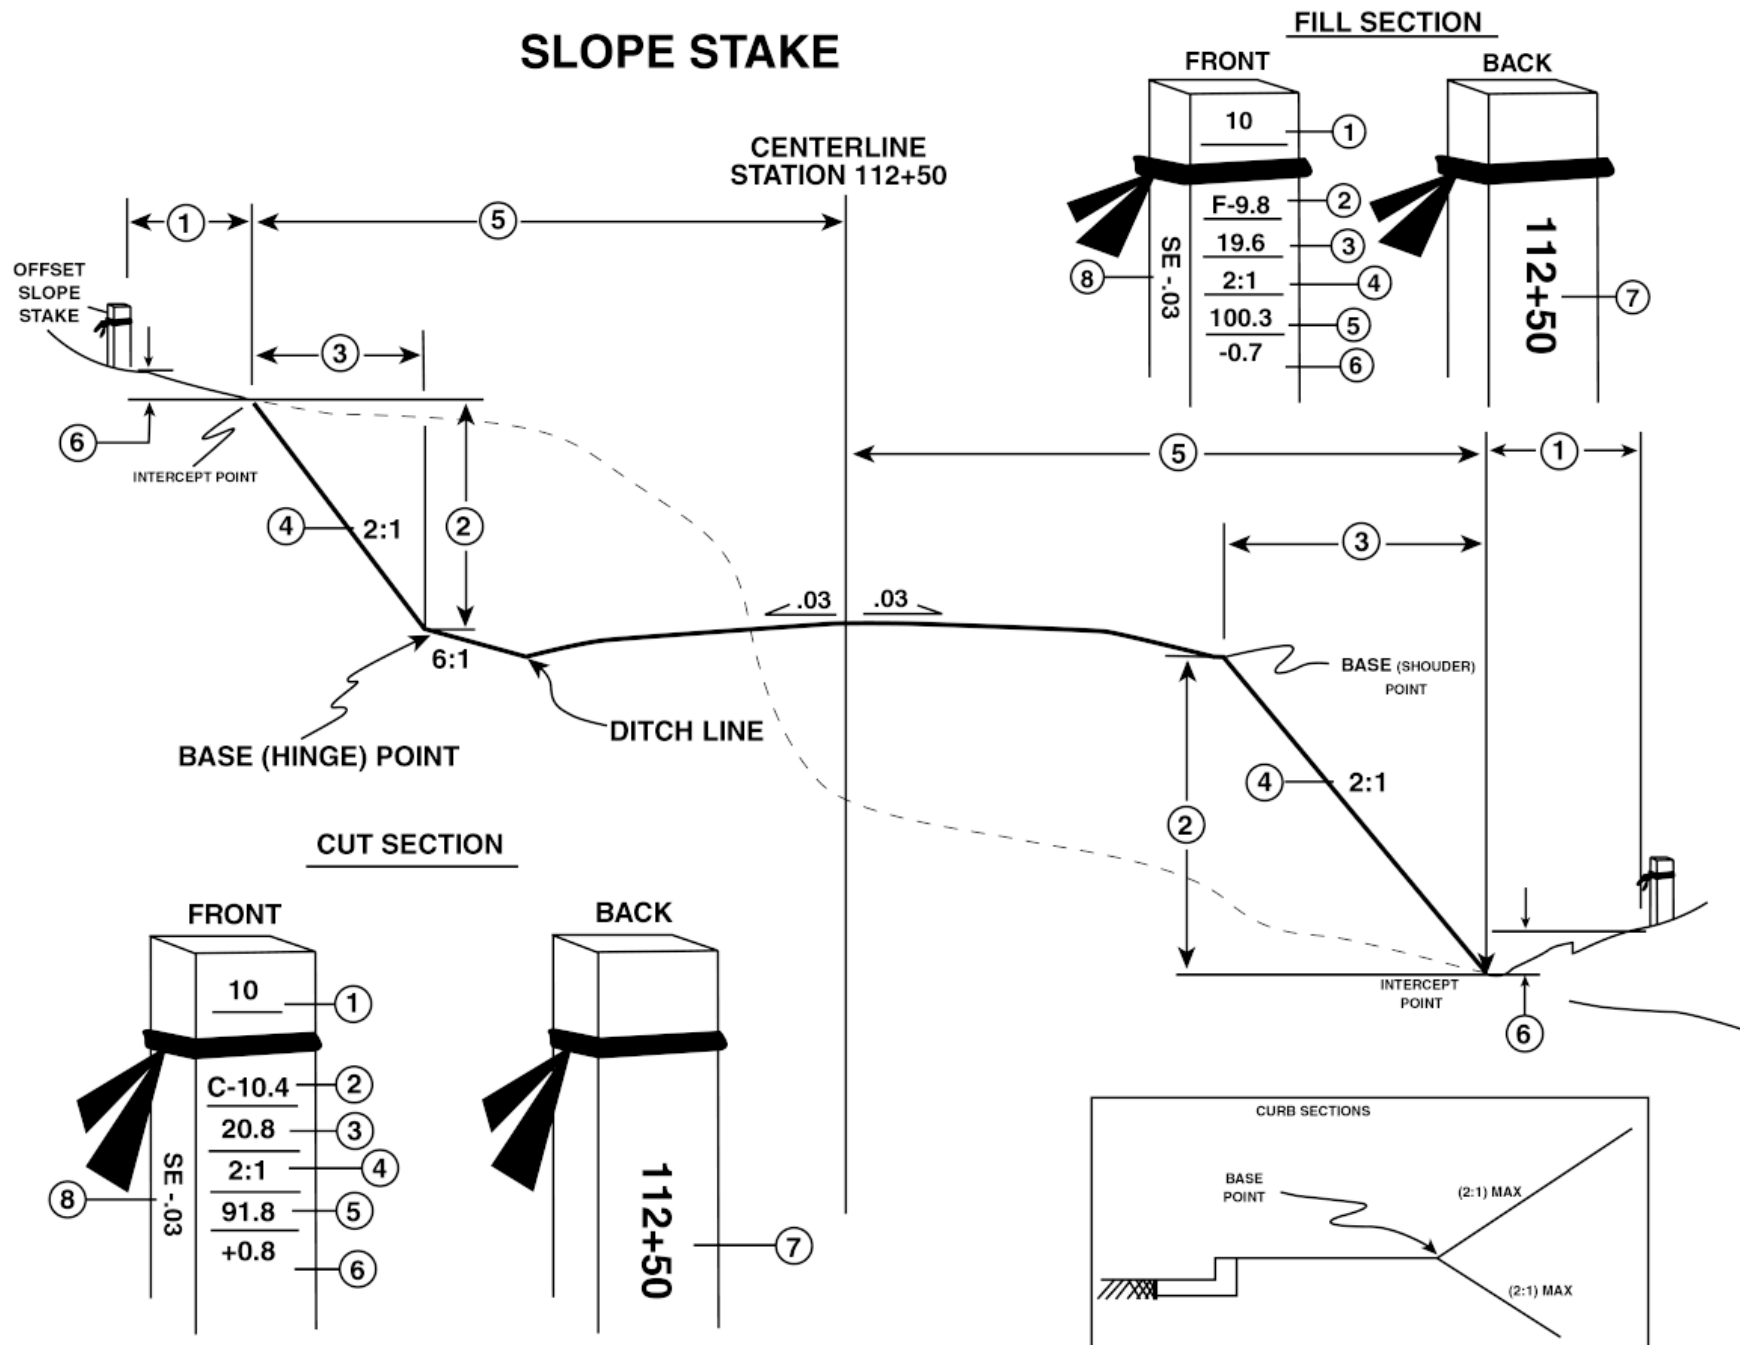


Figure 5.1



Chapter 6

Ditch Stakes

6.1 General Information

Drainage ditches typically are located at the toe of fill sections to provide a controlled channel to carry storm water. Ditch stakes provide the location, depth and width of such channels.

6.2 Guideline Information

Utilize Roadway Plans, Project Cross-Sections, slope stake information and drainage ditch details when establishing the location and depth of a drainage ditch. Ditch stake elevations should be established from the profile plan sheets. The ditch typical section will override profile grades in order to achieve minimum depths. The ditch depth should be measured either to the top of the ditch lining or to the flow line of the ditch (if no lining is specified).

6.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 18"

Recommended Flagging: Blue

Precision: Horz. 0.1', Vert. 0.1'


Stake Use: Information and Location

6.4 Stake Information

The information described below is detailed in *Figure 6.1*.

1. Offset distance to intercept point of back slope with natural ground
2. Cut to bottom of ditch from stake
3. Back slope of ditch
4. Base width
5. Ditch typical from plans
6. Offset difference (+, -)
(verticle difference between intercept point and offset ditch stake point)
 - + offset ditch stake point higher than intercept point
 - offset ditch stake point lower than intercept point
7. Station

DITCH STAKES

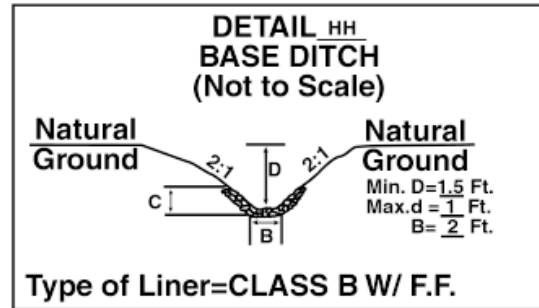

STA 756+50 LT -L-
STA 794+00 RT -L-
STA 19+20 RT-SR A-



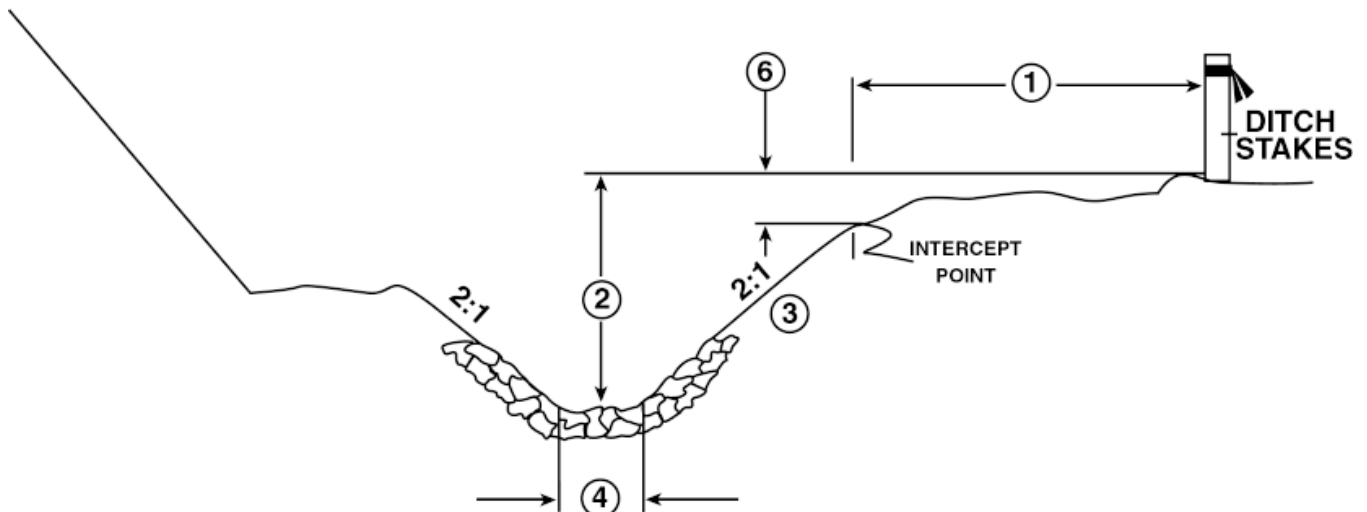


Figure 6.1

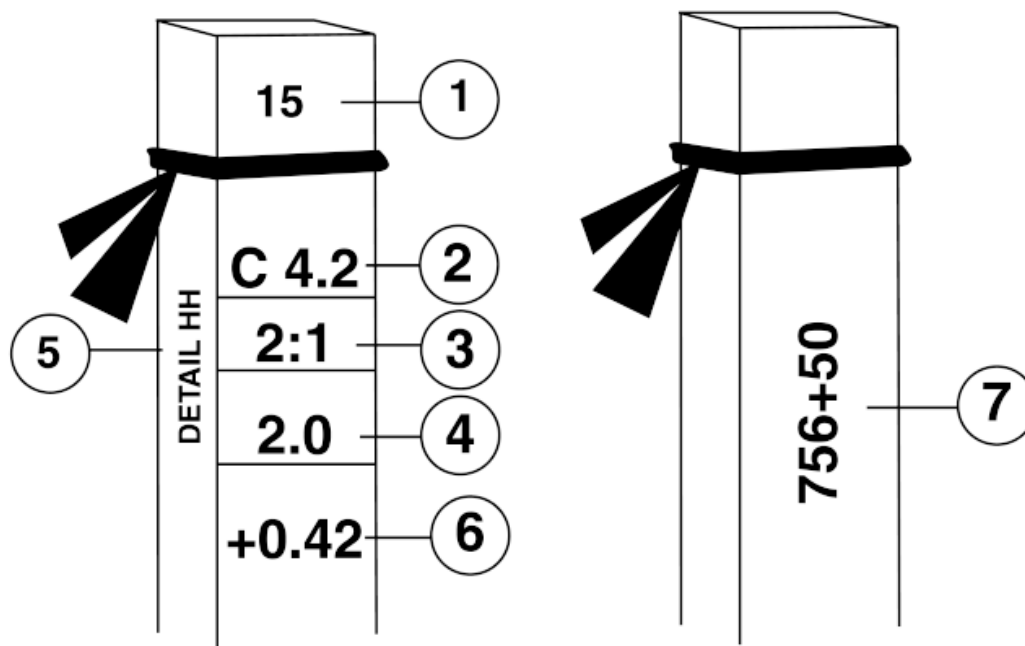

Chapter 7

Pipe Stakes

7.1 General Information

A critical task, on any project, is to construct the drainage so that it effectively collects and distributes storm water. During construction stakeout, the survey crew should identify potential drainage problems and make recommendations for correction to the Engineer. It is the responsibility of the construction stakeout crew to ensure that the drainage systems detailed in the plans will function properly as staked. If a concern exists that the drainage system may be inadequate, based upon field observations, it also should be addressed with the Engineer.

7.2 Guideline Information

Prior to calculating and staking the drainage system detailed in the plans, perform a field investigation of the proposed area. Consider the locations and elevations of all existing and proposed utilities, proposed utility construction, and existing and proposed drainage systems in the layout of the drainage system. A layout drawing of the drainage system must be submitted to the Engineer for review and approval. (See Appendix A.) However, before submitting the drawing, verify that all the required information is included by referring to the *Checklist For Drainage Layout Submittal* (located in Appendix A). In addition, unless otherwise instructed, calculate the entire network before submitting any portion of the network for approval. Adjust pipelines with camber to allow for settlement (reference *Camber for Pipe and Box Culverts* contained in Appendix A).

Establish pipe lengths from the drainage structure locations and/or actual location of the slope intercept with existing streams, natural ground or proposed drainage ditches as measured during the field investigation and/or layout. Use 12" hubs for referencing the pipe's line and flowline elevation. Pipelines greater than 200 feet will require intermediate hubs set on 100 foot intervals or on smaller intervals as deemed necessary by the Engineer. The intermediate hubs shall contain cuts or fills relative to the pipe's invert elevations directly adjacent to the intermediate hubs' location. For pipes laid with camber, establish and stake the line and flowline elevation on 50 foot intervals along the pipe length. Stationing of the pipe shall begin with 0+00 at the outlet end of the pipe and advance to the inlet end. Provide one reference line, consisting of two hubs with corresponding reference stakes, for the inlet and outlet of the pipeline. The first reference hub shall be a minimum of 10 feet (3 meters) from the reference point with the second hub installed at an equal distance from the first hub.

7.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 36"

Recommended Flagging: Blue

Stake Use: Information and Guard

Recommended Stake Size: $1\frac{3}{4}$ " x $1\frac{3}{4}$ " x 12" hub

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Grade and/or Alignment

7.4 Stake Information

Reference stakes will be used in conjunction with hubs to provide the required information as detailed below and depicted in *Figure 7.1*.

At First Reference Hub

1. Offset to the reference point of pipe
2. Station of the point referenced with respect to the pipe line
3. Cut or fill from hub to invert
4. Length size and type of pipe
5. Grade of pipe in percent with either inlet or outlet defined
6. Structure number

At Second Reference Hub

(Reference location of pipe by alignment with first hub)

1. Offset to the reference point of pipe
2. Station of the point referenced with respect to the pipe line
4. Length size and type of pipe
6. Structure number

At Intermediate Hubs

1. Offset to the pipe
2. Station with respect to the pipe line
3. Cut or fill from hub to invert

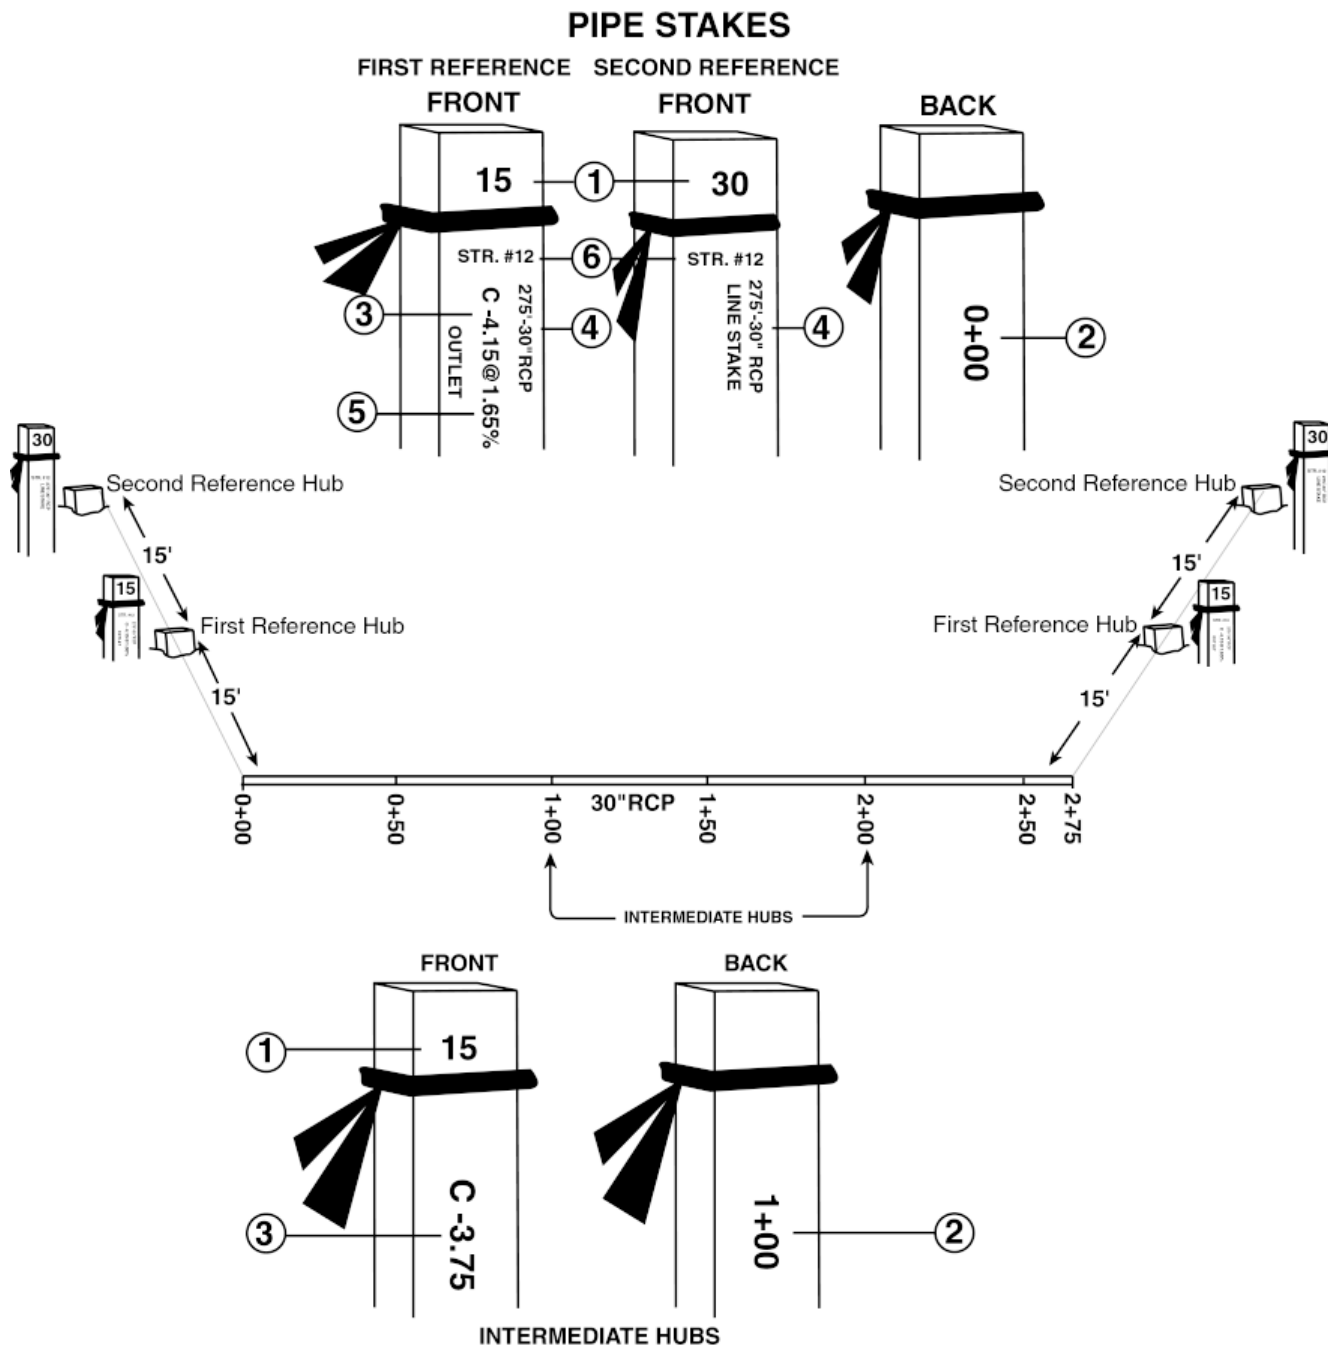


Figure 7.1



Chapter 8

Minor Structure Stakes

8.1 General Information

During construction stakeout, the survey crew should identify potential drainage problems in the field and make recommendations for correction to the Engineer. It is the responsibility of the construction stakeout crew to ensure that the drainage systems detailed in the plans will function properly as staked. Verify the location of all drainage structures within sag vertical curves and reposition as necessary to assure the structure is located at the lowest point. Superelevations at both the roadway and shoulder should be considered in establishing the lowest point. If a concern exists that the drainage system may be inadequate based upon field observations, it should be addressed with the Engineer.

8.2 Guideline Information

Stake each drainage structure independently of each pipeline. Each structure will require a reference line for alignment and grade, consisting of at least one hub on opposite sides of the drainage structure. The hubs should have equal offsets and be a minimum of 10 feet (3 meters) from the reference point. The reference line should mark the centerline of junction boxes and drop inlets, and the inside back wall of catch basins. Grades should be set and referenced from the hubs to top of structure for junction boxes and catch basins, and flow line of grate for drop inlets. Refer to the Standard Drawings for the grate and frame dimensions.

Prior to submitting a drainage system layout drawing, refer to the *Checklist For Drainage Layout Submittal* (located in Appendix A) to verify that all of the required information is included. Unless otherwise approved, calculate the entire network before submitting any portion of the network.

8.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 36"

Recommended Flagging: Blue

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Information

Recommended Stake Size: 1 $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 12" hub with tack

Recommended Flagging: Blue

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Grade and/or Alignment

8.4 Stake Information

The information described below is detailed in *Figure 8.1*.

1. Offset to the center of the structure
2. Reference line of hubs with respect to drainage structure
3. Cut or fill from hub to invert and top of structure for drop inlets and junction boxes, top of grate for catch basins
4. Structure number

MINOR DRAINAGE STRUCTURE



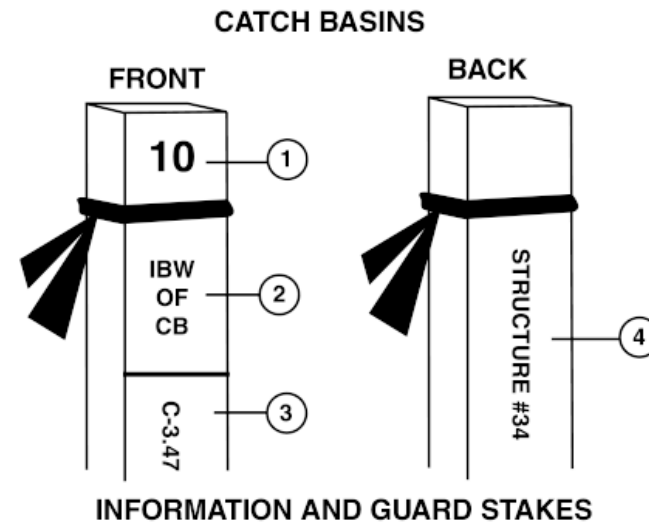


Figure 8.1

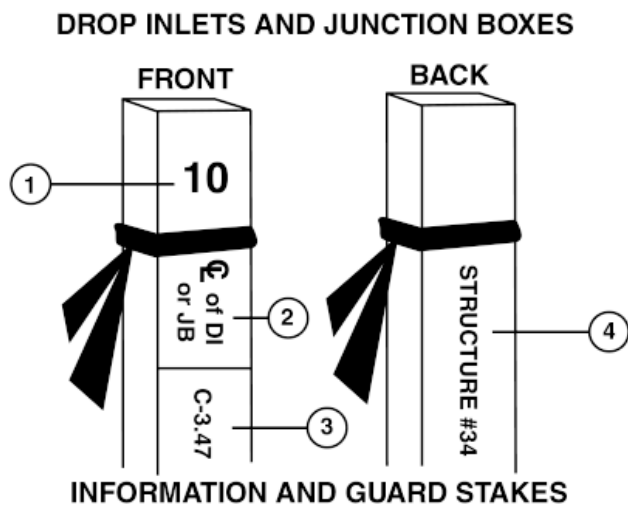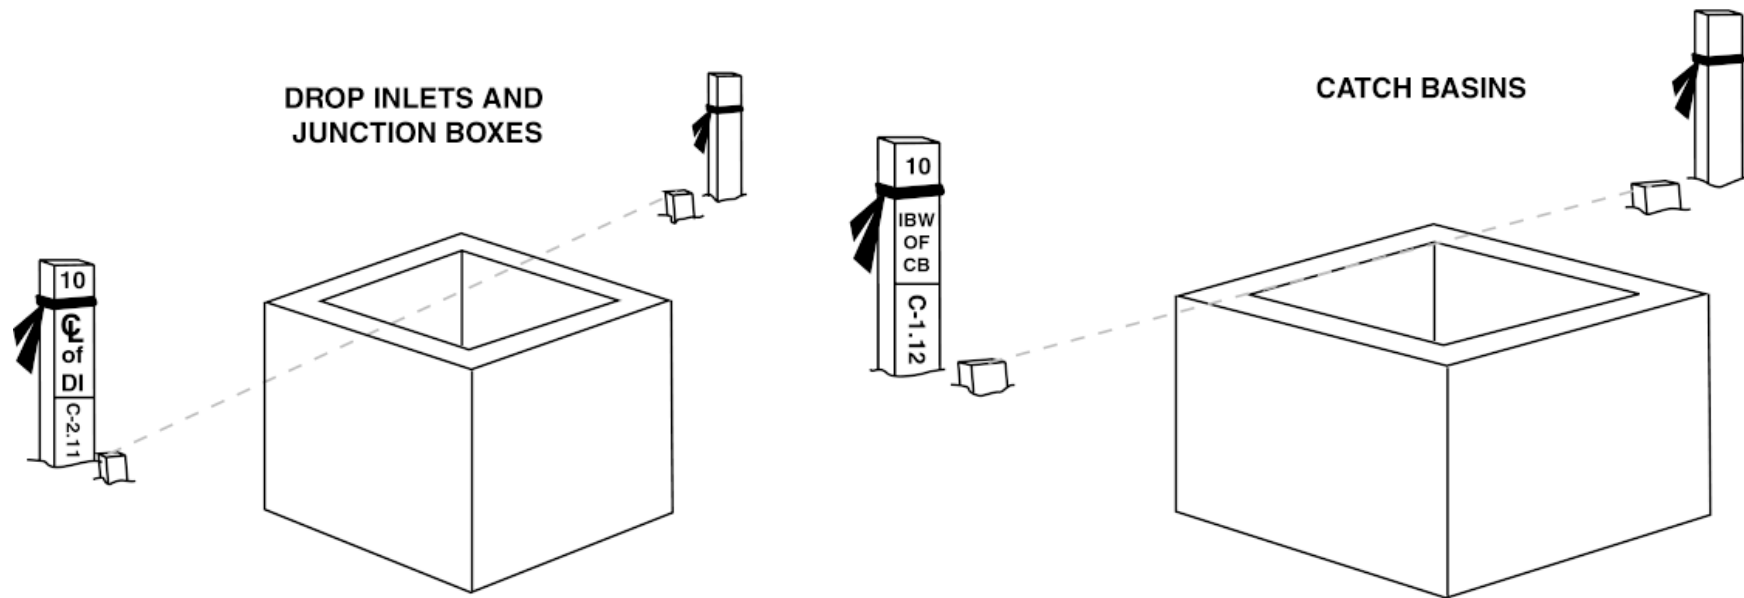

Chapter 9

Endwall Stakes

9.1 General Information

Endwalls assist in channeling water into the pipe network, minimizing erosion of the stream channel and retaining the embankment above the pipe. Prior to staking the endwall, you must know the limits of your embankment and pipe.

9.2 Guideline Information

Prior to staking the endwall, set slope stakes to establish the limits of the embankment. Stake endwalls perpendicular to the pipe. Adjust the slope and pipe length to accommodate the endwall. Endwalls require one reference line with a hub on each side of the proposed structure. The line should be referenced to the outside face of the endwall. Grades should be set and referenced from the hubs to a known or calculated elevation on the proposed structure. (See *Figure 9.1.*) When locating the endwall, the fill slope should be projected to intersect with the inside wall of the endwall.

9.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 36"

Recommended Flagging: Blue

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Information

Recommended Stake Size: $1\frac{3}{4}$ " x $1\frac{3}{4}$ " x 12" hub with tack

Recommended Flagging: Blue

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Grade and/or Alignment

9.4 Stake Information

The information described below is detailed in *Figure 9.2.*

1. Offset to the center, outside face of endwall
2. Cut or fill from hub to reference point on endwall (typically top of wall)

ENDWALL REFERENCING

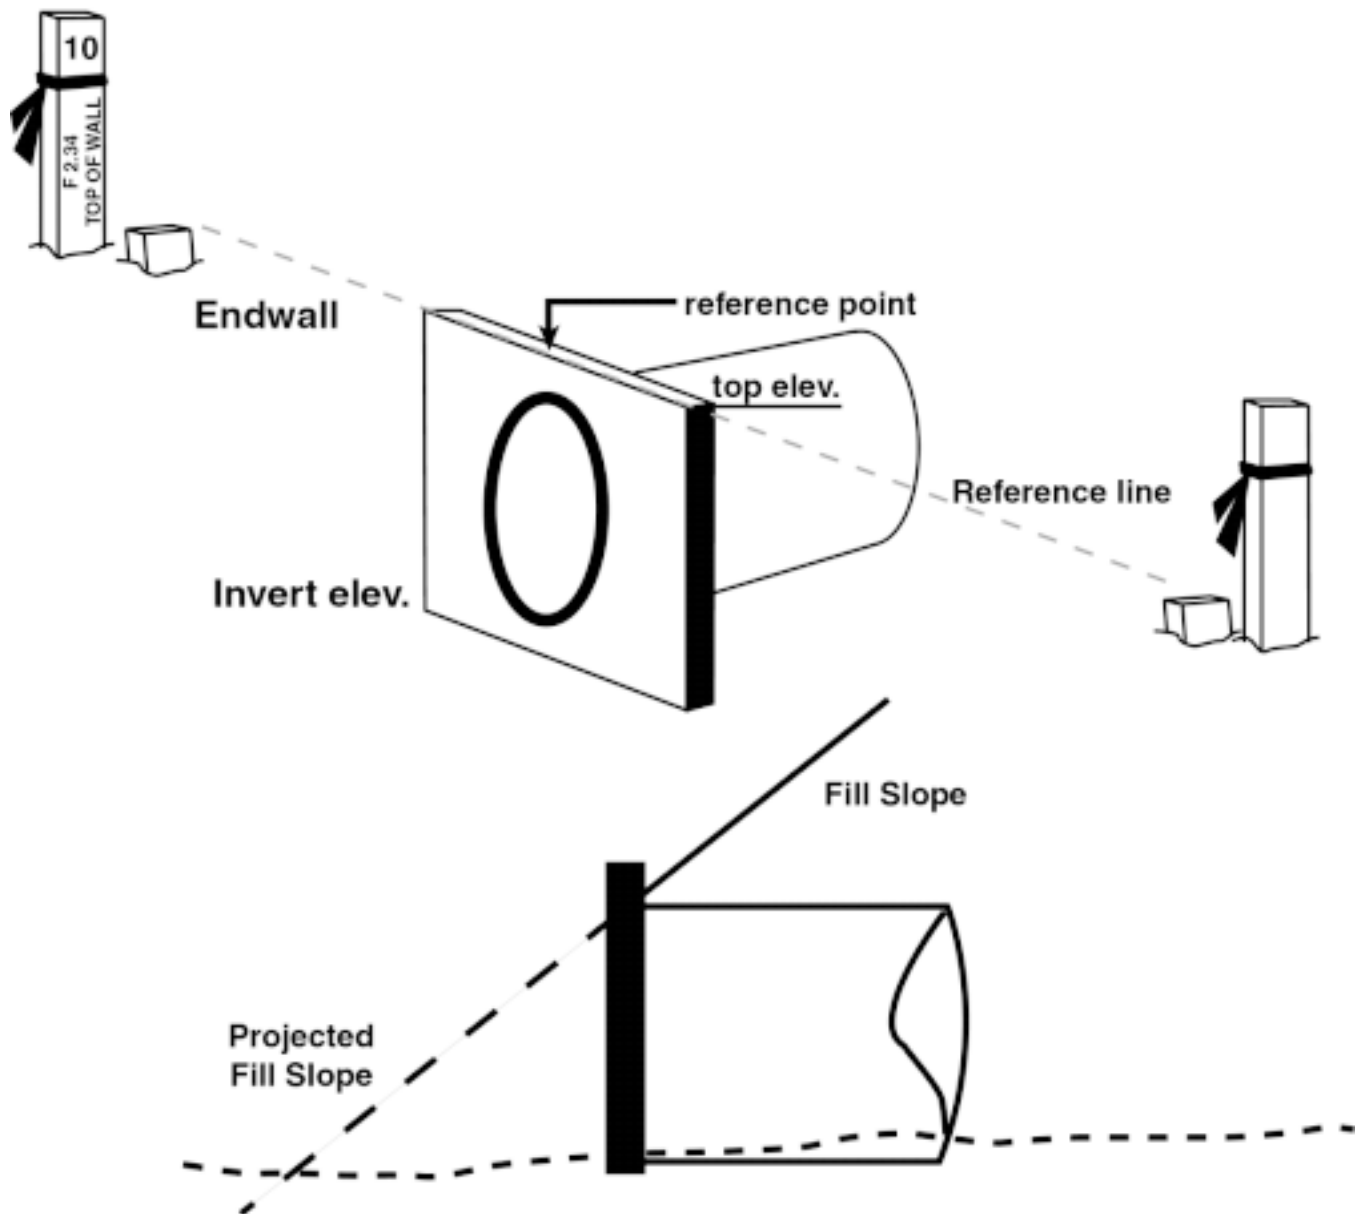


Figure 9.1

ENDWALLS


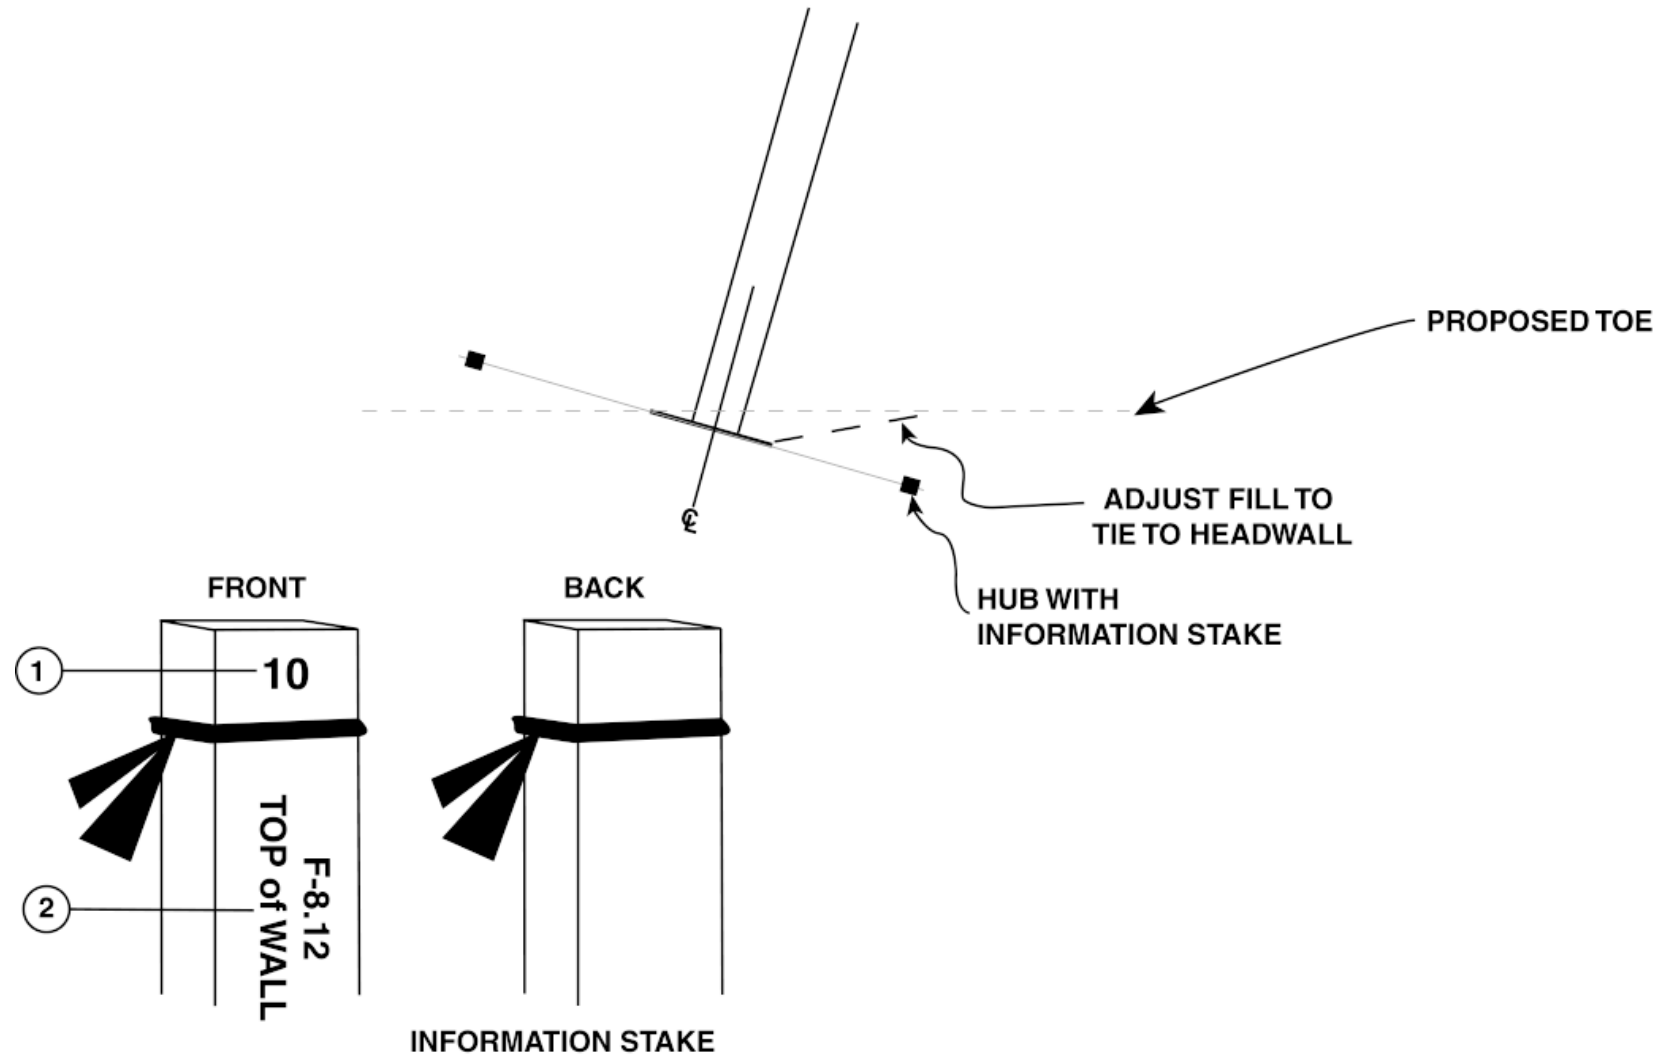


Figure 9.2



Chapter 10

Intermediate Grade Stakes

10.1 General Information

Intermediate grade stakes typically are set after slope stakes and before fine grade stakes. Although the information contained on intermediate grade stakes may be obtained from the slope stakes, intermediate grade stake installation often expedites grading operations by providing the equipment operators a reference to the finished grade location.

10.2 Guideline Information

Set intermediate grade stakes on the centerline or a designated offset line (grade or crown point). On each stake, provide the difference in elevation from finished grade to the top of the stake. Mark the top of the stake with an X to designate the elevation reference.

10.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 18"

Recommended Flagging: Orange

Precision: Horz. 0.1', Vert. 0.01'

Stake Use: Grade and Alignment

10.4 Stake Information

The information described below is detailed in *Figure 10.1*.

1. Station number
2. Superelevation
3. Alignment designation
4. Cut or fill

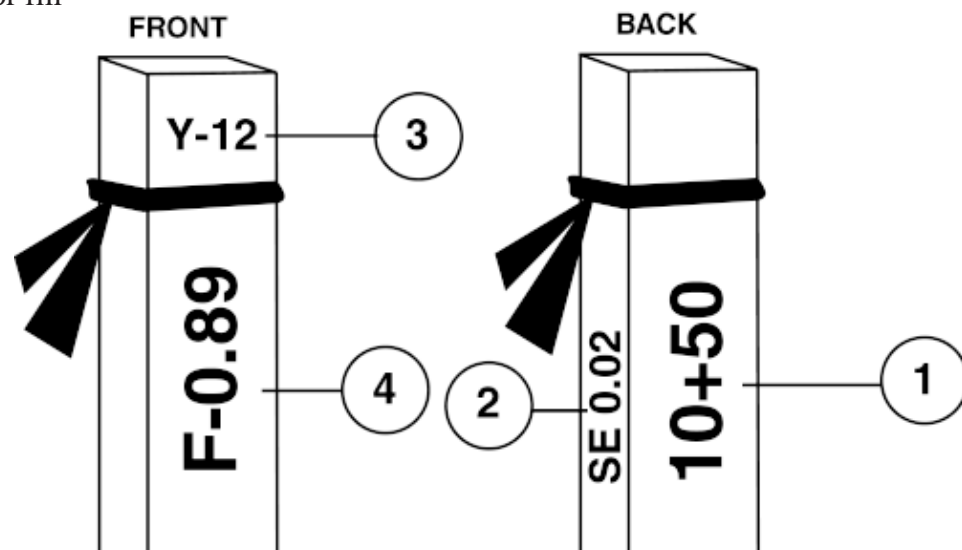


Figure 10.1



Chapter 11

Curb Stakes

11.1 General Information

Various types of curb are specified within NCDOT projects to assist in collecting and distributing storm water to a controlled outlet. Although several types of curbs or curb and gutters may be specified, they should be staked uniformly as detailed below.

11.2 Guideline Information

Stake curb and gutter on 50 foot (20 meter) or smaller intervals in sharp radii, tapers and along flat grades as deemed necessary. Intervals may be adjusted by the Engineer to properly construct the project. Stake curb and gutter with a minimum 3 foot (0.9 meters) and maximum 6 foot (1.8 meter) offset. Set hubs with tacks on the offset line used for horizontal and vertical control. Reference grades to the top of the curb and the offset to the back of the curb. Reference will be taken from the tack in the hub.

When staking radii, stake and mark the curve radius point along with the PC point, the PT point and one or more points equally distributed throughout the curve. When staking radii for -Y- lines, the grades along -L- should override those of the -Y- line to facilitate rideability of the -L- line. Adjust the -Y- lines accordingly.

Consult the Standard Drawings for *Curb Slopes for Variable Superelevations*.

11.3 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 18"

Recommended Flagging: Orange

Stake Use: Information and Guard

Recommended Stake Size: 1 $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 12" with tack

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Grade and Alignment

11.4 Stake Information

The information described below is detailed in *Figure 11.1*

1. Offset to back of curb
2. Cut or fill to top of curb
3. Gutter slope
4. Super elevation of pavement
5. Station number

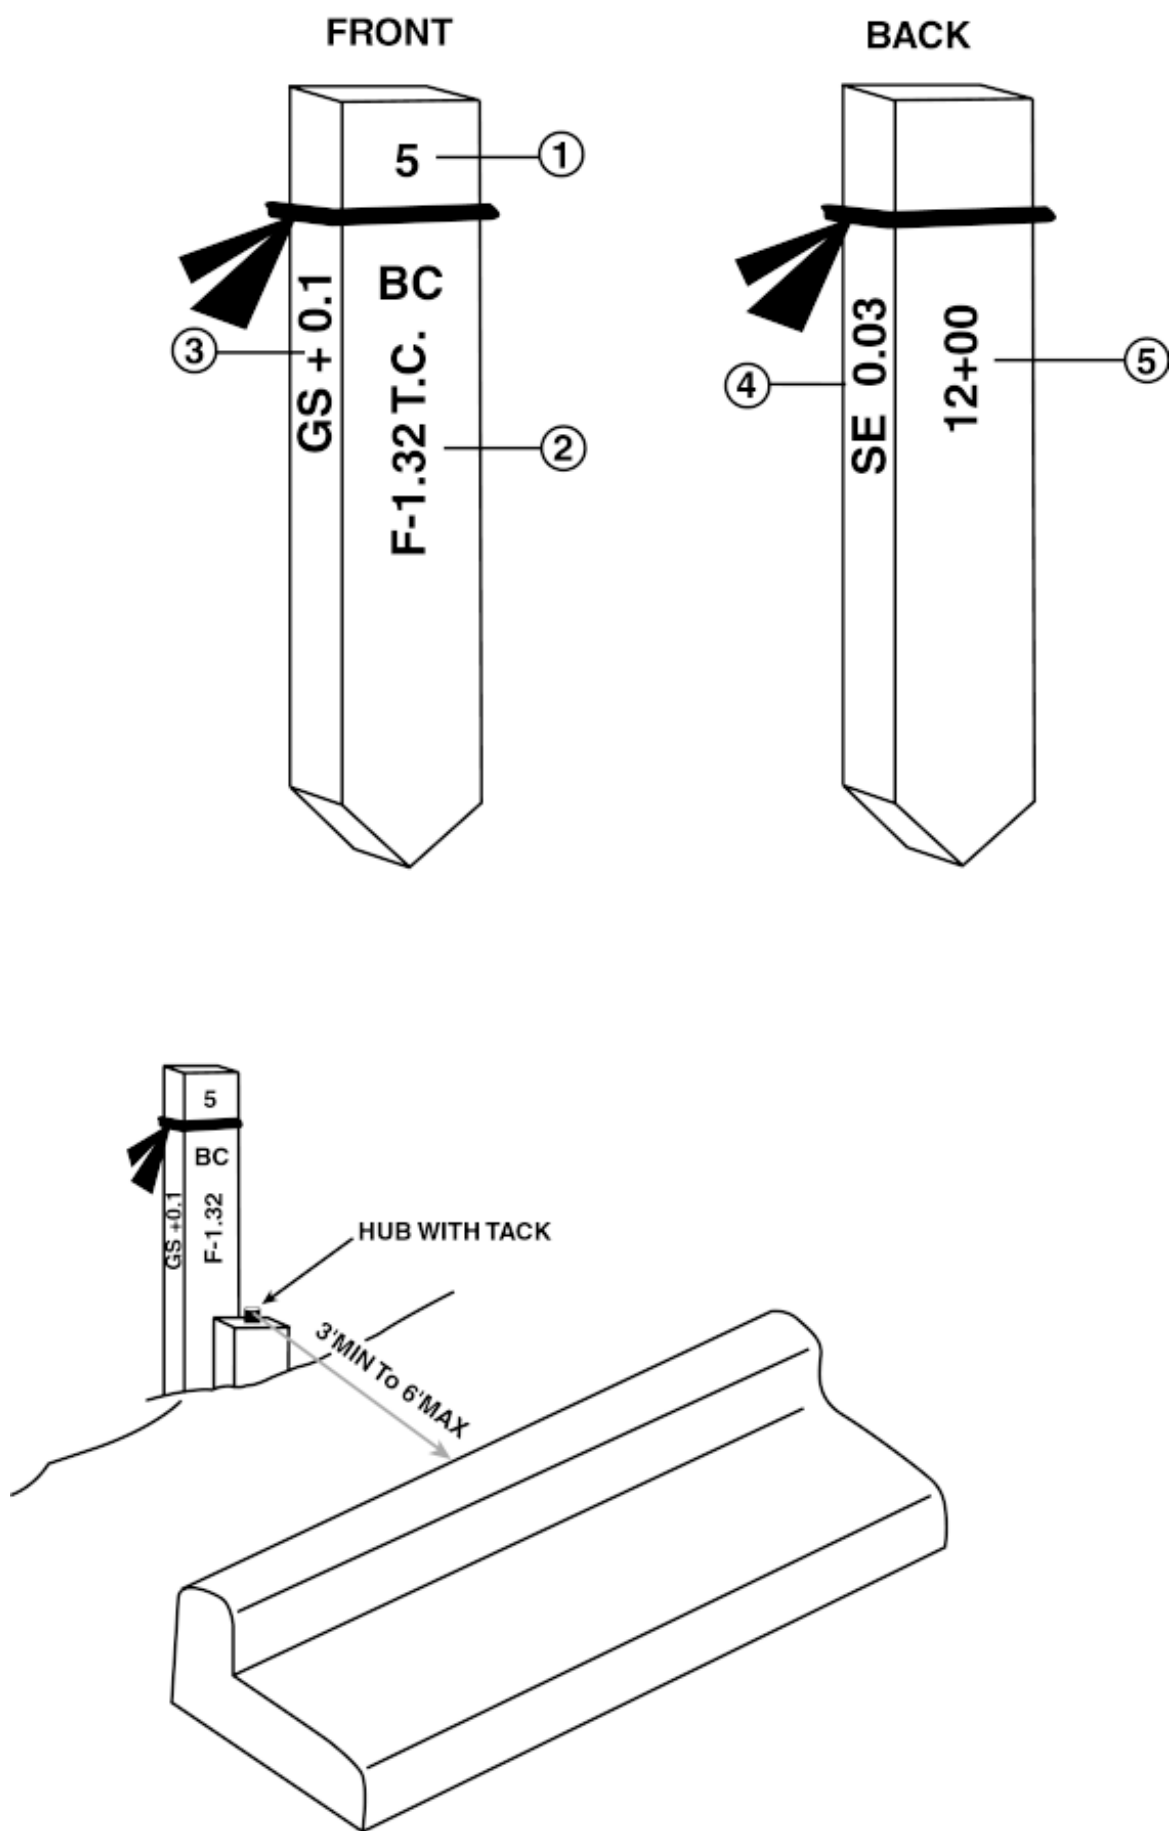


Figure 11.1



Chapter 12

Fence Line Stakes

12.1 General Information

The majority of fence on projects will be control of access fence. However, different fences may be specified for Right-of-Way or safety considerations.

12.2 Guideline Information

Set fence stakes at the intervals required by field conditions, not to exceed 100 feet (30 meters). If the control of access and right of way lines differ, set stakes on the control of access line. Otherwise set stakes on the right of way line. Establish the Department's Right-of-Way or controlled access line by using the plans and/or any applicable revisions.

Stake other fences along the alignment detailed in the Plans.

12.3 Type Of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 18"

Recommended Flagging: White

Precision: Horz. 0.1'


Stake Use: Alignment

12.4 Stake Information


The information described below is detailed in *Figure 12.1*.

1. Denotes type of fence
2. Offset
3. Station and distance from centerline

FENCE STAKES

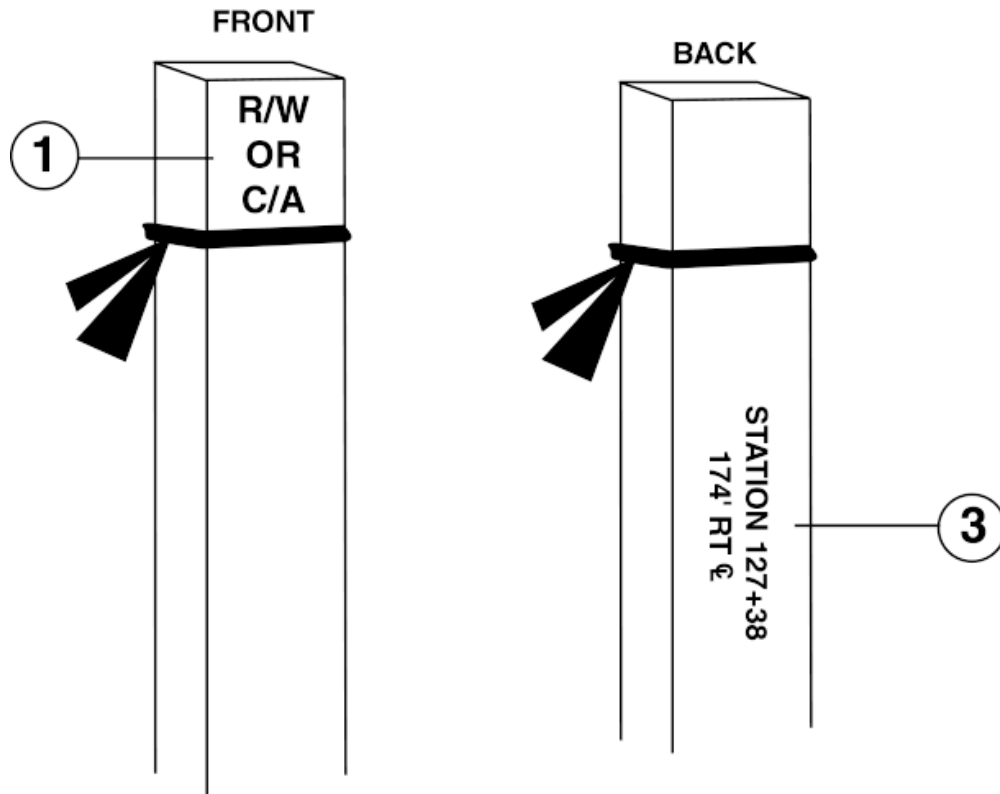

Control of Access Fence

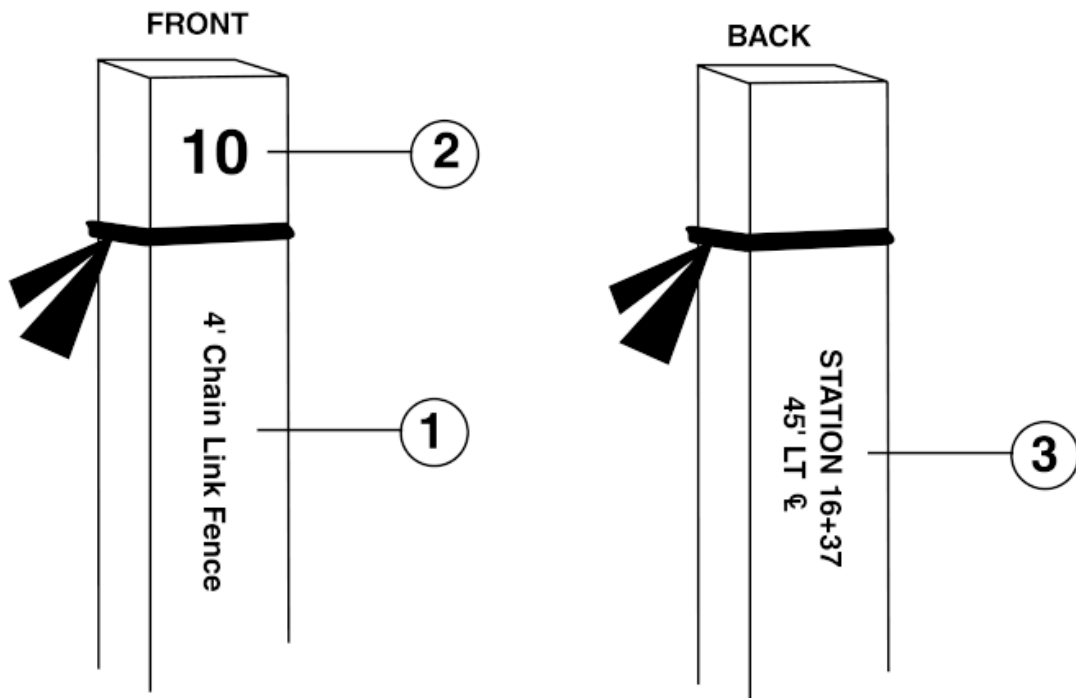

Other Fences

Figure 12.1



Chapter 13

Fine Grade Hubs

13.1 General Information

Fine grade hubs reference the proposed finish elevation. They are used to establish and check the elevation of all layers of the pavement schedule up to the final layer of surface. Typically set upon completion of rough grading, fine grade hubs provide reference for the elevation of all layers of the pavement – including subgrade, base and pavement.

13.2 Guideline Information

Install and reference all fine grade hubs to finish grade. Set fine grade hubs at a maximum 50 foot (20 meter) interval. A smaller interval may be necessary for gores, tapers, and sharp horizontal and vertical curves or superelevation transitions. Set fine grade hubs on a suitable offset from the edge of paved shoulder, but no less than 5 feet (1.5 meters). (See *Figure 13.1* and *13.2*.) Set an intermediate stake at the centerline if the fine grade hubs span more than 60 feet (20 meters) of proposed pavement. Reestablish this intermediate stake after each layer of pavement structure, excluding the final layer of surface course.

Retain and, if necessary, reinstall all fine grade hubs until the completion of the first layer of surface course.

13.3 Type of Stake

Recommended Stake Size: 1 ¾" x 1 ¾" x 12"-24" hub
¾" x 1 ¾" x 18" reference stake

Recommended Flagging: Orange

Precision: Horz. 0.1', Vert. 0.01'

Stake Use: Alignment, Finished Grade and Pavement Slope

13.4 Stake Information

The information described below is detailed in *Figure 13.3*.

1. Offset
2. Cut or fill from reference hub to the proposed projected finished grade, excluding Case III B (cut or fill to proposed grade or crown point elevation)
3. Superelevation
4. Station number
5. Distance to Grade Point or Crown Point
6. Build up (Optional - Case III A)

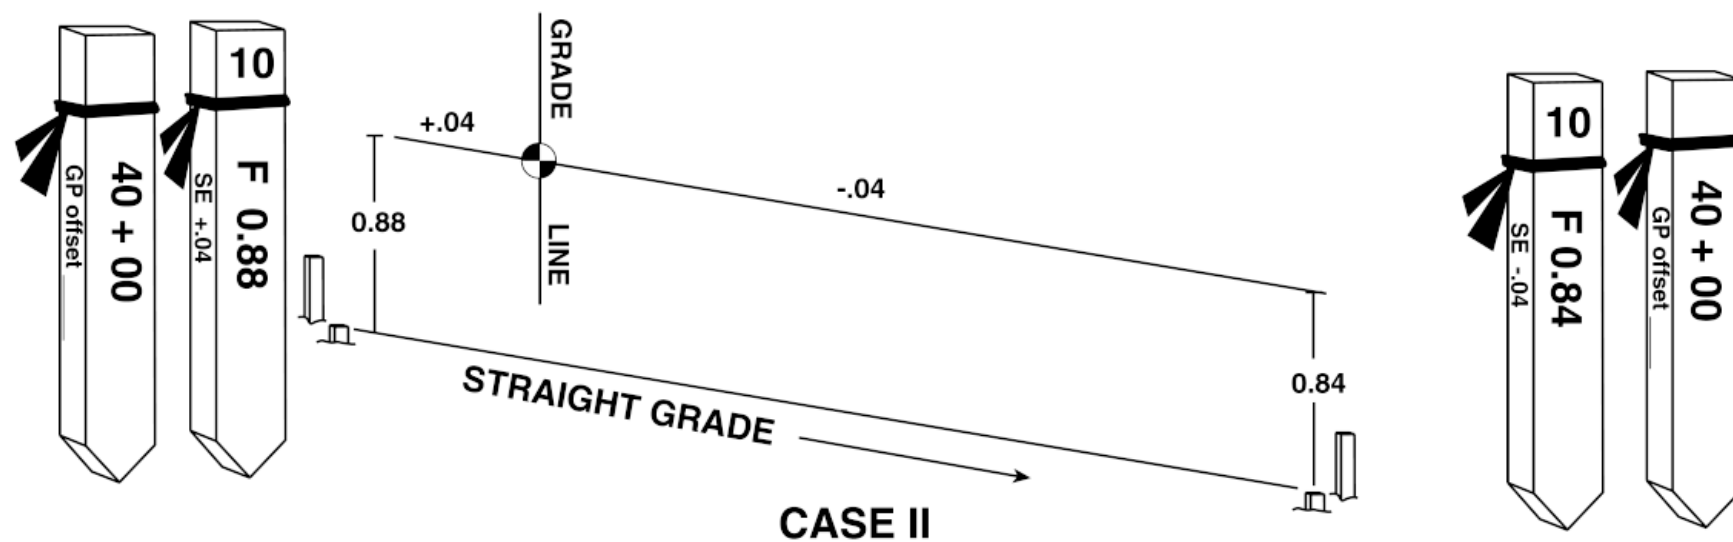
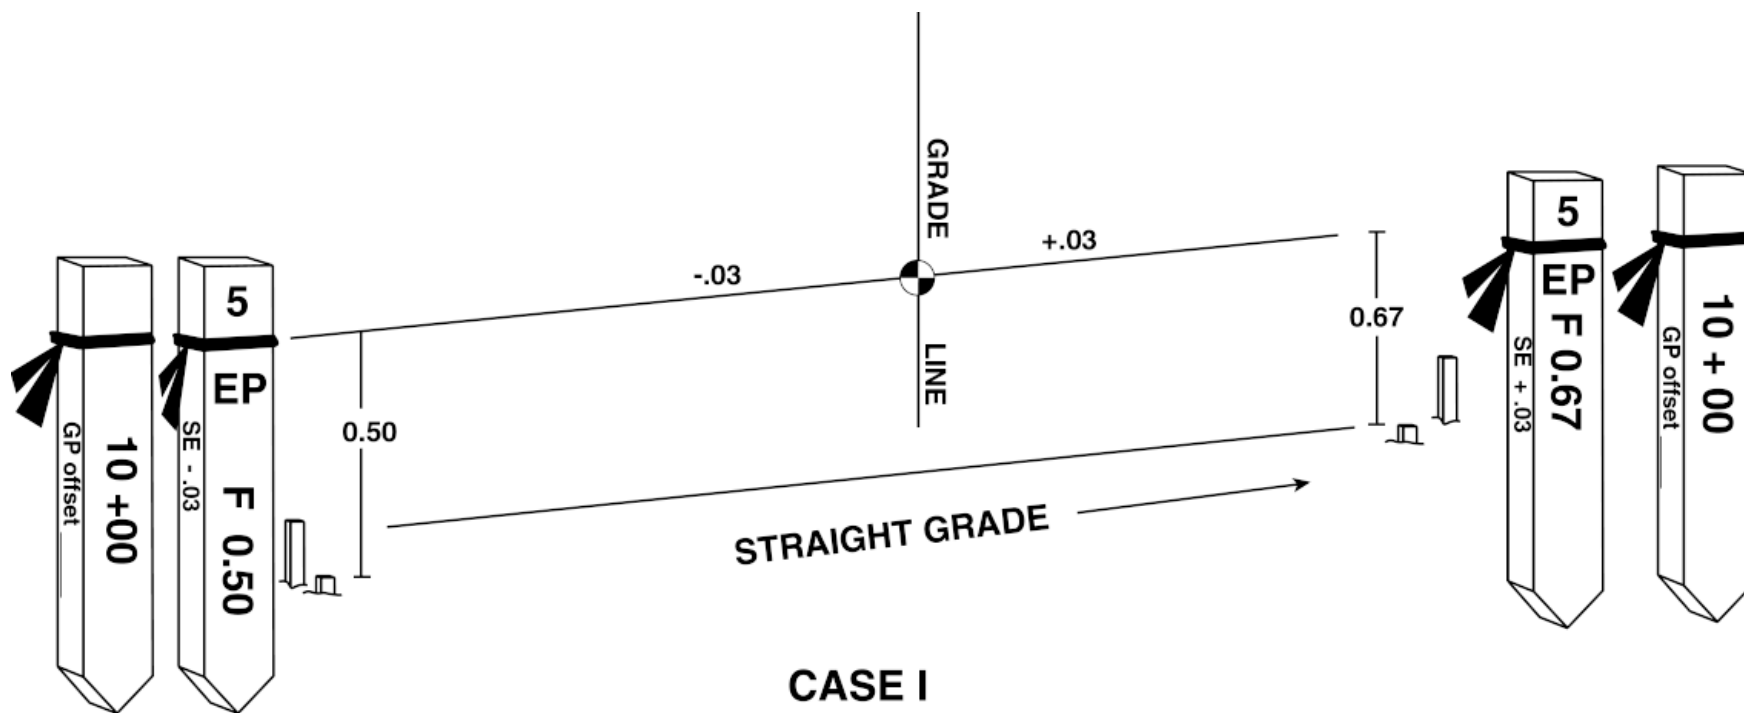


Figure 13.1

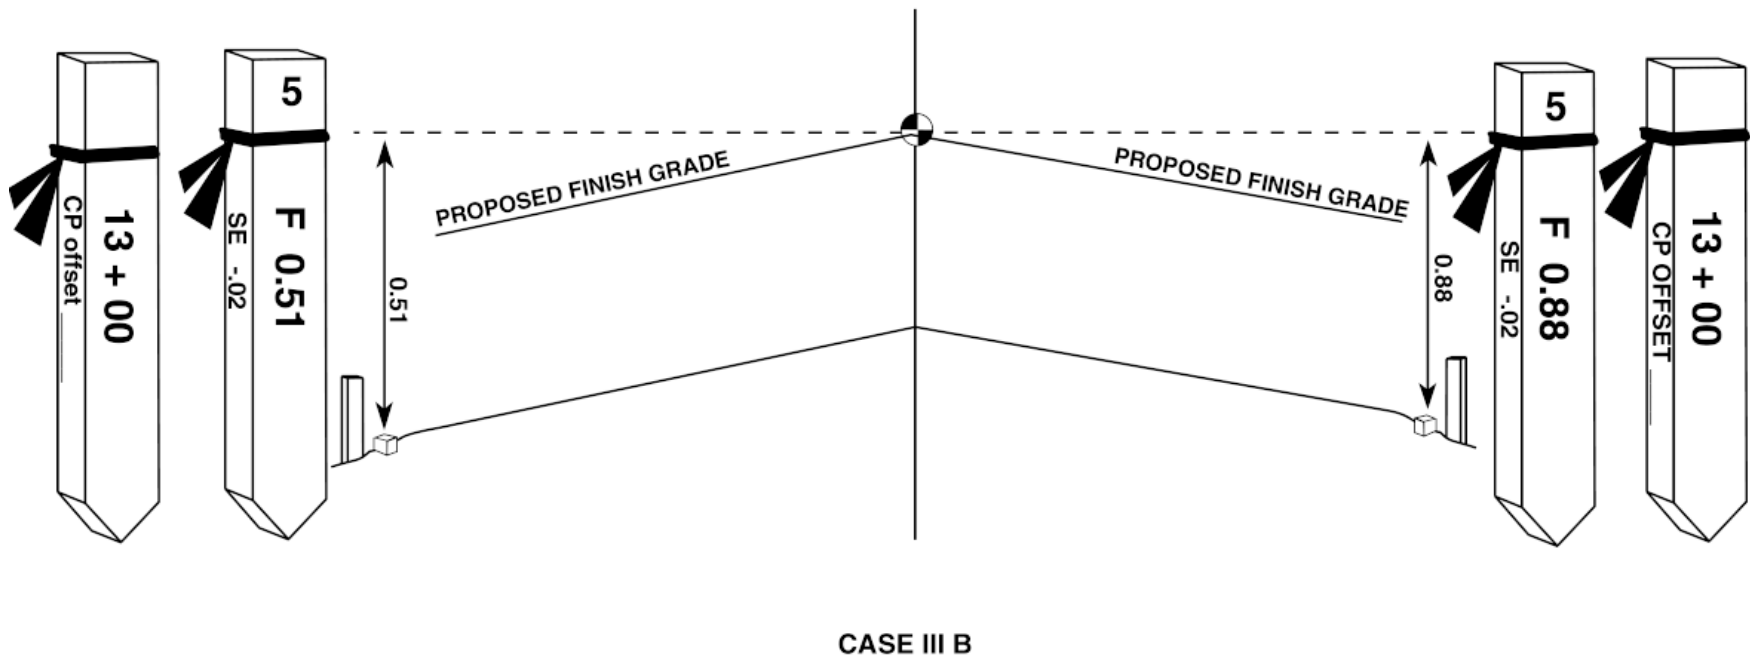
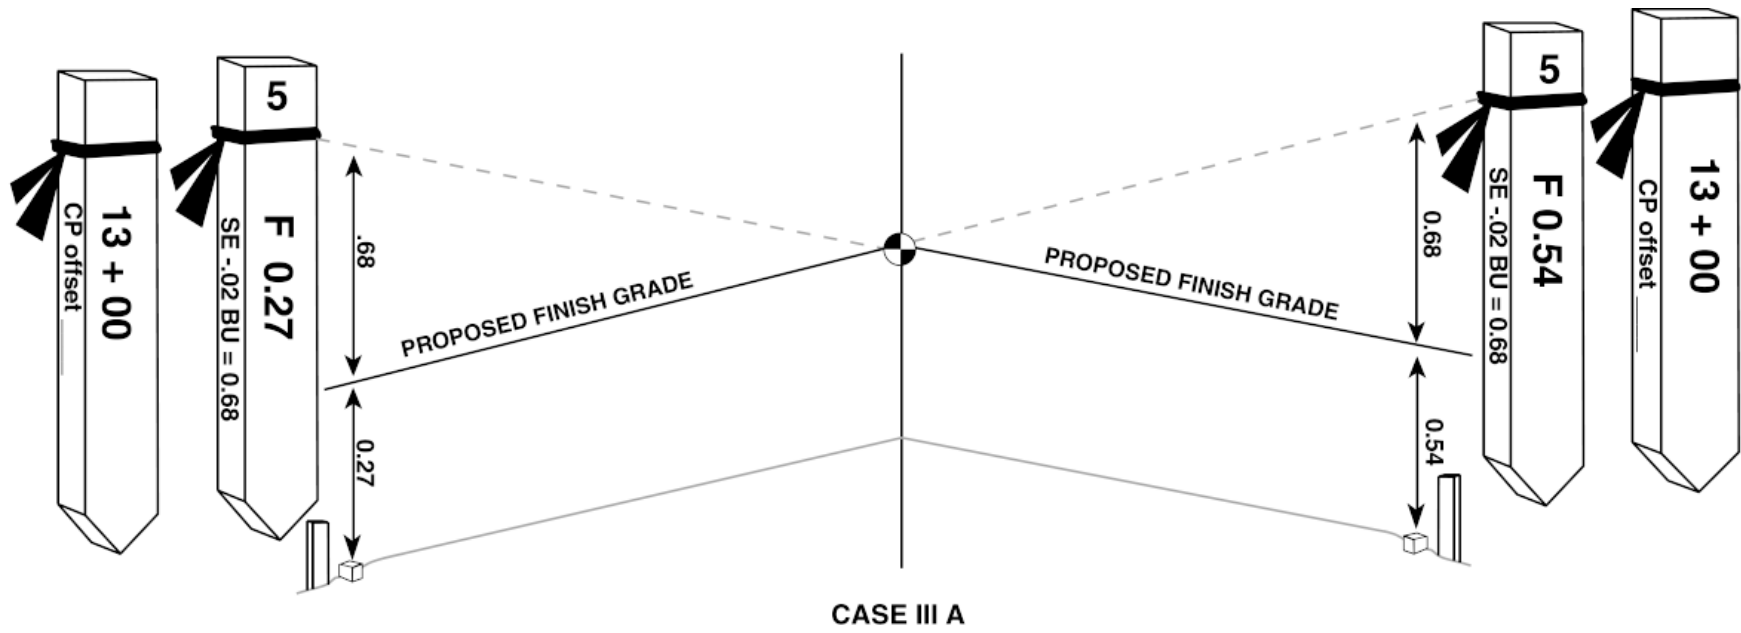


Figure 13.2


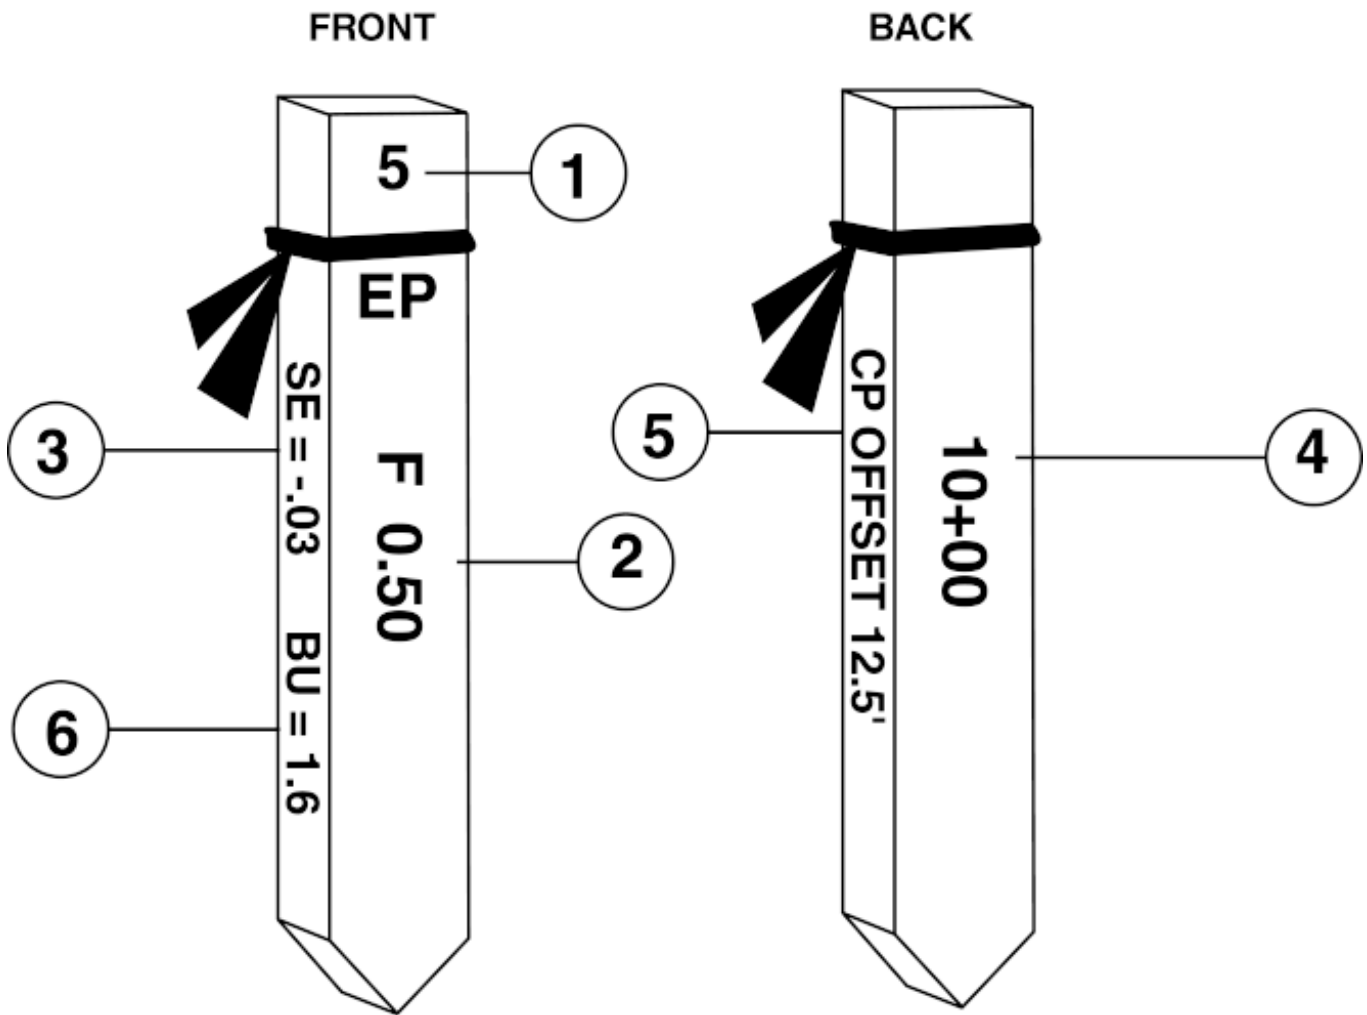


Figure 13.3



Chapter 14

Right-of-Way Markers

14.1 Guideline Information

Reference the location of all proposed Right-of-Way monuments within the construction limits. Submit reference information to the Engineer for review. Submit any Right-of-Way discrepancies between the roadway plans, including any applicable revisions, and the location established by the Department.

Unless concrete Right-of-Way markers are specified in the Contract, install a Right-of-Way monument cap and a carsonite witness stake at each proposed location. Mount the monument cap on an 18" long #5 reinforcing bar, which has been driven flush with the top of the ground. Using a hammer, snugly secure the monument cap to the top of the bar. Install a carsonite witness stake adjacent to the Right-of-Way monument, and drive it approximately 12 inches (30 centimeters) into the ground. Avoid damaging the top of the monument cap or witness stake. The Department will provide both the Right-of-Way monument cap and witness stake.

If concrete monuments are specified, install a 60D nail or hub with tack at the proposed monument locations. The Contractor should install additional reference line stakes on opposing sides of the proposed monument location to reference this location during concrete monument installation.

14.2 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x $1\frac{3}{4}$ " x 18"

Recommended Flagging: White

Precision: _____

Stake Use: Information and Guard

Recommended Stake Size: $1\frac{3}{4}$ " x $1\frac{3}{4}$ " x 12" with tack or 60D Nail

Recommended Flagging: White

Precision: Horz. 0.01'

Stake Use: Location

14.3 Stake Information

The information described below is detailed in *Figure 14.1*.

1. Denotes type of stake (Right-of-Way)
2. Alignment
3. Offset from survey line
4. Station
5. Monument cap
6. 18" long #5 reinforcing bar
7. Carsonite witness stake

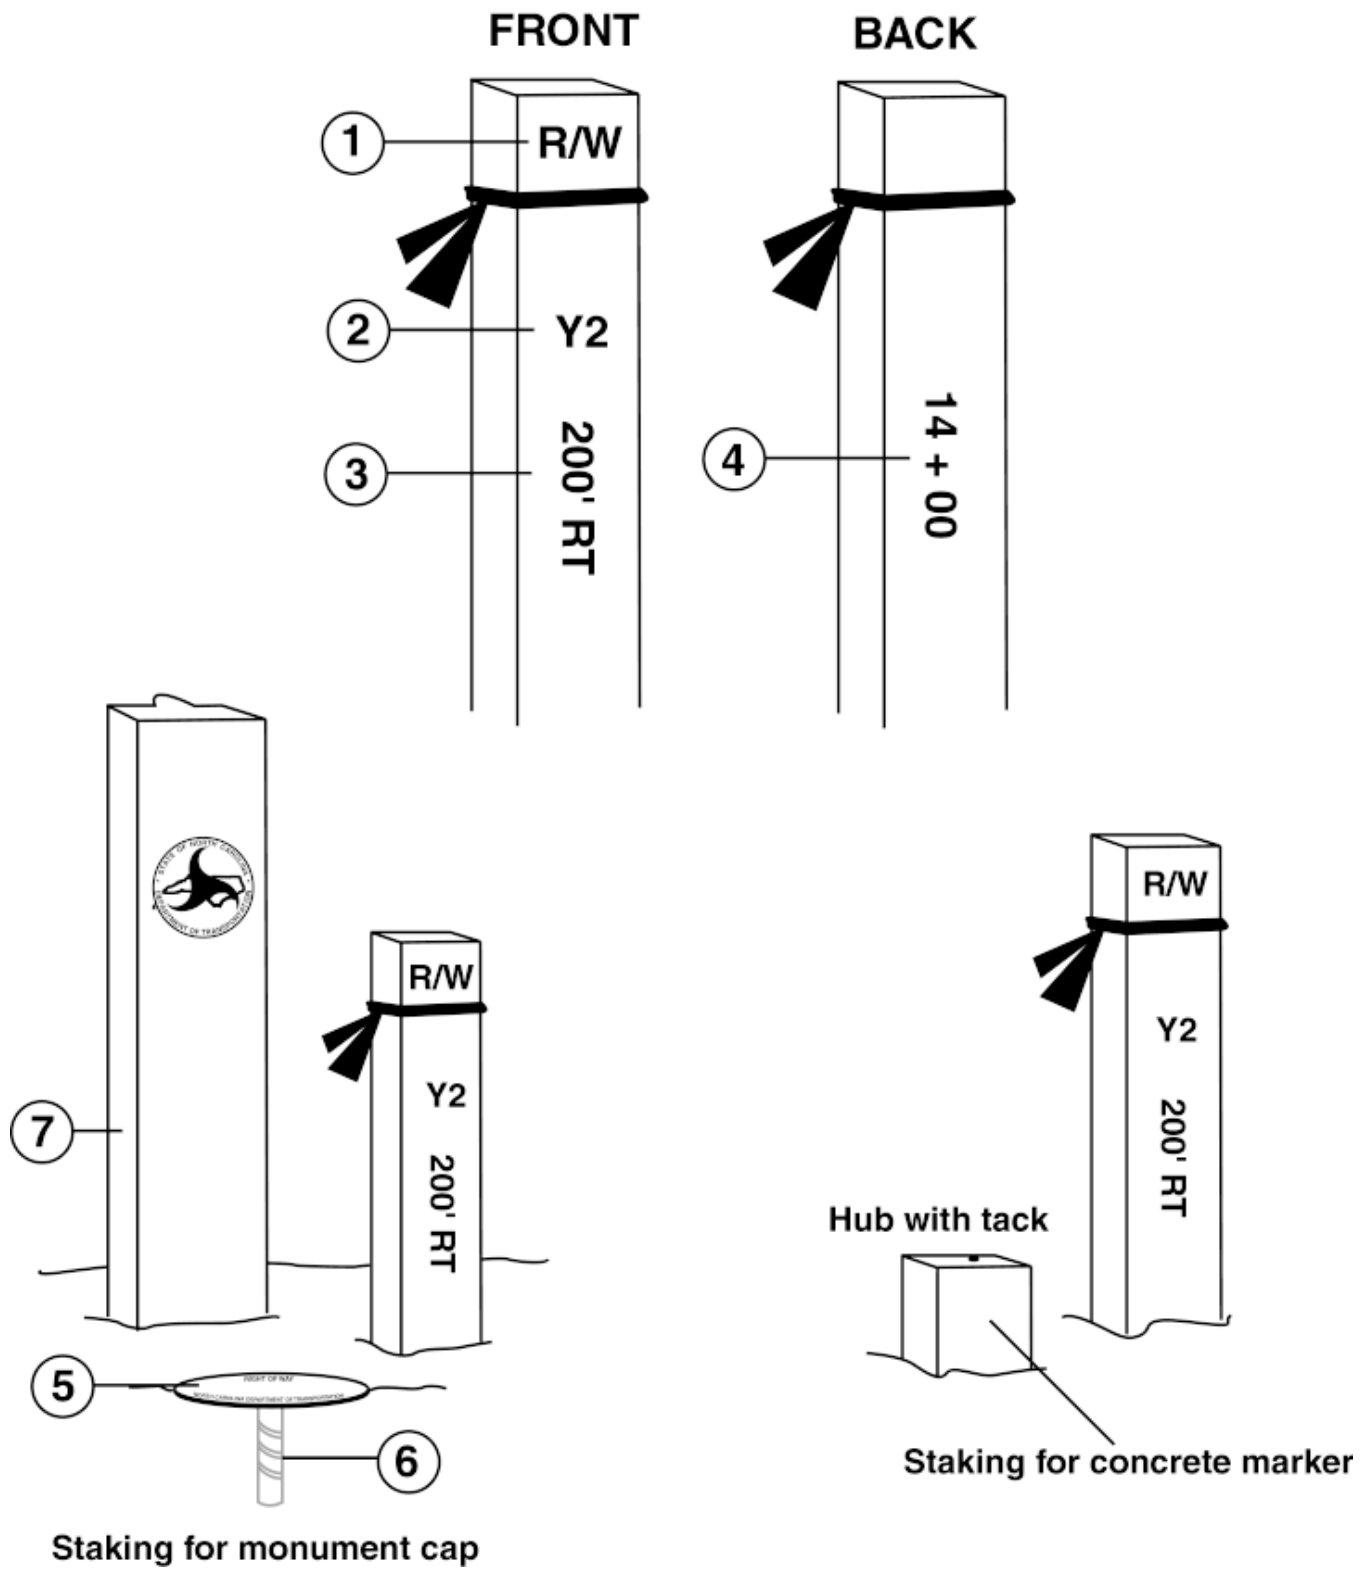


Figure 14.1



Chapter 15

Signs

15.1 General Information

The s-dimensions and support lengths detailed in the plans are used for estimating purposes only and are not intended for fabricating supports. Prior to sign support fabrication, the s-dimensions should be verified by either theoretical calculation or field measurement and should be submitted to Traffic Engineering for review. Once verified by the Contractor and reviewed by the Department, sign plan revisions will be provided to the Contractor for the fabrication of ground mounted supports and design of overhead sign structures.

15.2 Guideline Information

Prior to establishing the s-dimensions, stake the horizontal location of the proposed signs for the Engineer's review. Perform a thorough investigation of the proposed sign locations, or revised locations established during the Engineer's review. Identify any obstruction, either existing or proposed, which may interfere with the proposed sign installation. Such items may include, but are not limited to, existing or proposed drainage systems, underground and/or aboveground utilities, and drainage ditches. If adjustments in the sign locations are warranted to avoid obstacles, advise the Engineer in writing. Include a detailed sketch of the proposed sign location, the obstruction and the new location recommended to avoid the obstruction. Do not revise any sign locations without the written direction of the Engineer.

Once proposed overhead sign locations are confirmed, use the roadway plans to calculate the theoretical finished elevations at that station. Consider the following in calculating the theoretical finished section:

- Proposed lane and shoulder widths, including any tapers or widening for guardrail roadway
- Superelevations
- Shoulder rollovers
- Side ditches
- Barrier rail sections
- Slope gradients
- Any other items which may affect the span length or elevation of the proposed sign

15.3 Overhead Sign Assemblies

The s-dimension for overhead sign assemblies is the difference in elevation between the highest point of the roadway section, including the paved shoulder, and the ground at the proposed center of the overhead sign footing location. (See *Figure 15.1*.)

Use the above information, along with the sign plans, to calculate the s-dimensions for the overhead signs. Submit an 11 1/2" x 17" cross-section drawing of the proposed overhead sign locations detailing the following:

- Roadway, shoulder and slope gradients
- Edge of pavement elevations
- Elevation of each lane line
- Elevation of the ground at each sign footing location
- Location of any monolithic islands
- Calculated s-dimension

Unless grading work is not anticipated at the proposed sign location, calculate and install a slope stake at each proposed sign location to ensure the Contractor constructs the slopes to the gradient utilized in calculating the theoretical finished section.

Layout the overhead sign assemblies as detailed in the Contractor's approved shop drawings. Provide reference line for the footings, which consists of a minimum of two hubs with corresponding reference stakes. Reference the center of the sign footing. The first reference hub shall be a minimum of 10 feet (3 meters) from the reference point with the second hub installed at an equal distance from the first hub. Grades should be set and referenced from the hubs to a known or calculated elevation of the proposed footing. (See *Figure 15.3.*)

15.4 Ground Mounted Signs (Type A and B)

The s-dimension for ground mounted signs represents an increase (+) or decrease (-) in support length relative to the elevation of the edge of the outside travel lane, not the outside edge of the paved shoulder. (See *Figure 15.2.*) Reference the *Typical Elevation Ground Mounted Sign* detail located within the project Signing Plans.

Submit to the Engineer, in tabular format, the s-dimensions for each support within the proposed Type A and B ground mounted signs.

Provide reference line for the footings, which consists of a minimum of two hubs with corresponding reference stakes. Reference the center of the sign footing. The first reference hub shall be a minimum of 10 feet (3 meters) from the reference point with the second hub installed at an equal distance from the first hub. Grade information is typically not required. (See *Figure 15.4.*)

15.5 Ground Mounted Signs (Type D, E and F)

S-dimensions are not required for Type D, E and F Ground Mounted Signs.

Provide location of ground mounted signs. Install an information stake at the proposed sign location. (See *Figure 15.5.*)

15.6 Type of Stake

Recommended Stake Size: 1 3/4" x 1 3/4" x 12" hub

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Grade and/or Alignment

Recommended Stake Size: 3/4" x 1 3/4" x 18"

Recommended Flagging: Pink

Stake Use: Information and Location

15.7 Stake Information

The information described below is detailed in *Figure 15.6*.

1. Offset to center of footing
2. Grade to known or calculated elevation of footing
(typically not required for ground mounted signs)
3. Distance to centerline
4. Station
5. Alignment

*
NOTES:
ALL OF THESE DIMENSIONS AND SLOPES NEEDED
TO BE VERIFIED AND SUBMITTED TO THE ENGINEER
FOR REVIEW.



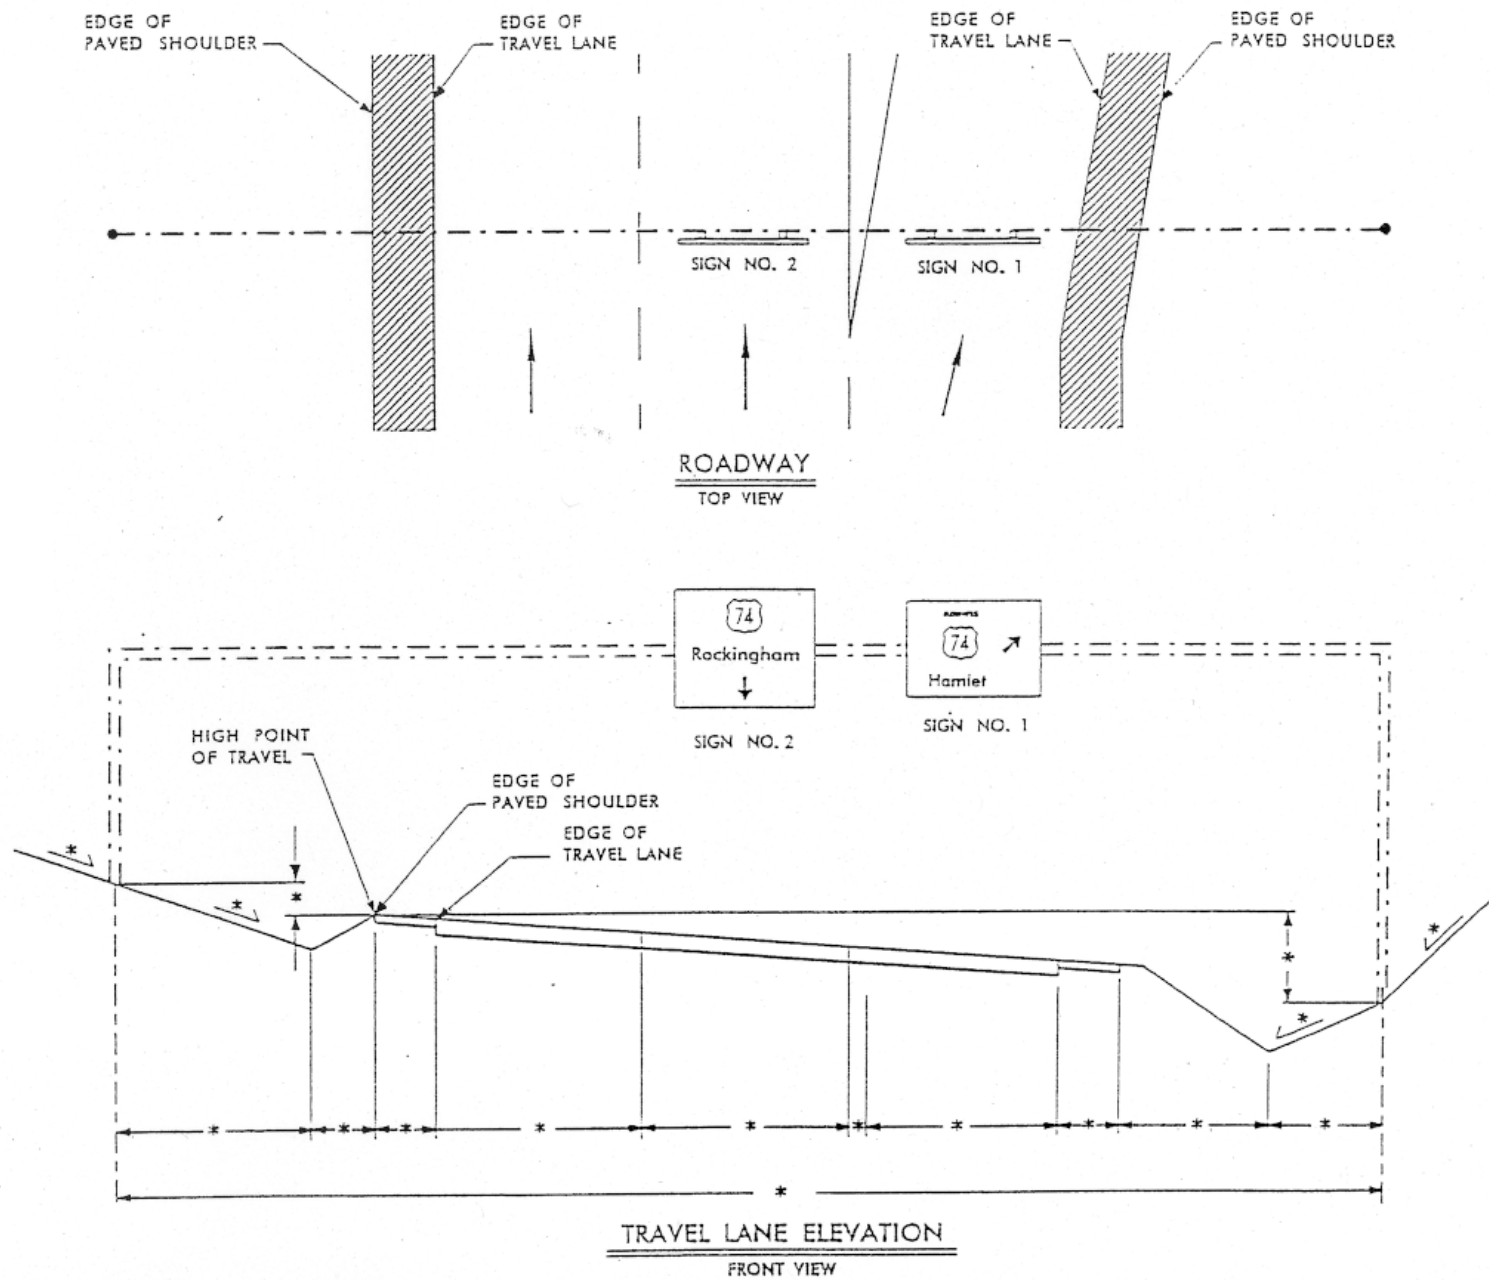



Figure 15.1

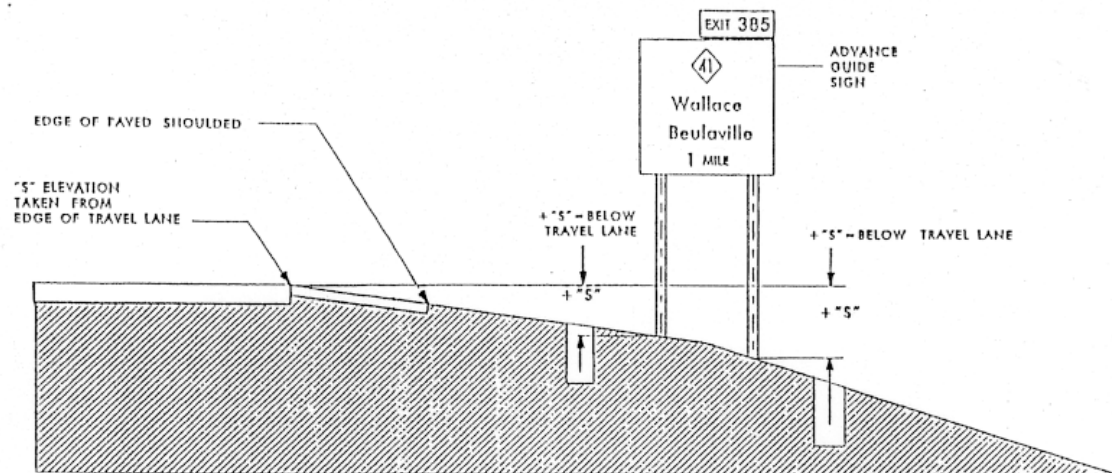

BELOW THE TRAVEL LANE ELEVATION
FRONT VIEW

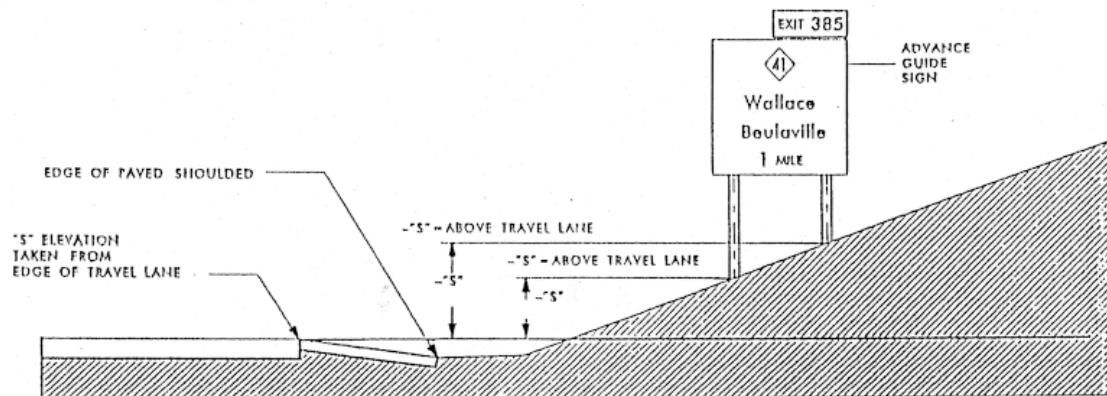

ABOVE THE TRAVEL LANE ELEVATION
FRONT VIEW

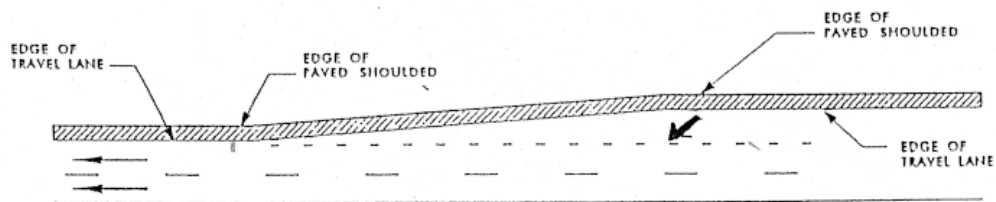

ROADWAY
TOP VIEW

NOTES:

1. MAXIMUM $\pm 5'$ DISTANCE CAN NOT EXCEED $-3'0"$
2. FOR GROUND MOUNTED SIGNS THE OFFSET IS FROM THE EDGE OF TRAVEL LANE NOT THE EDGE OF PAVED SHOULDER

Verification of Ground Mounted Signs

Figure 15.2

Overhead Signs

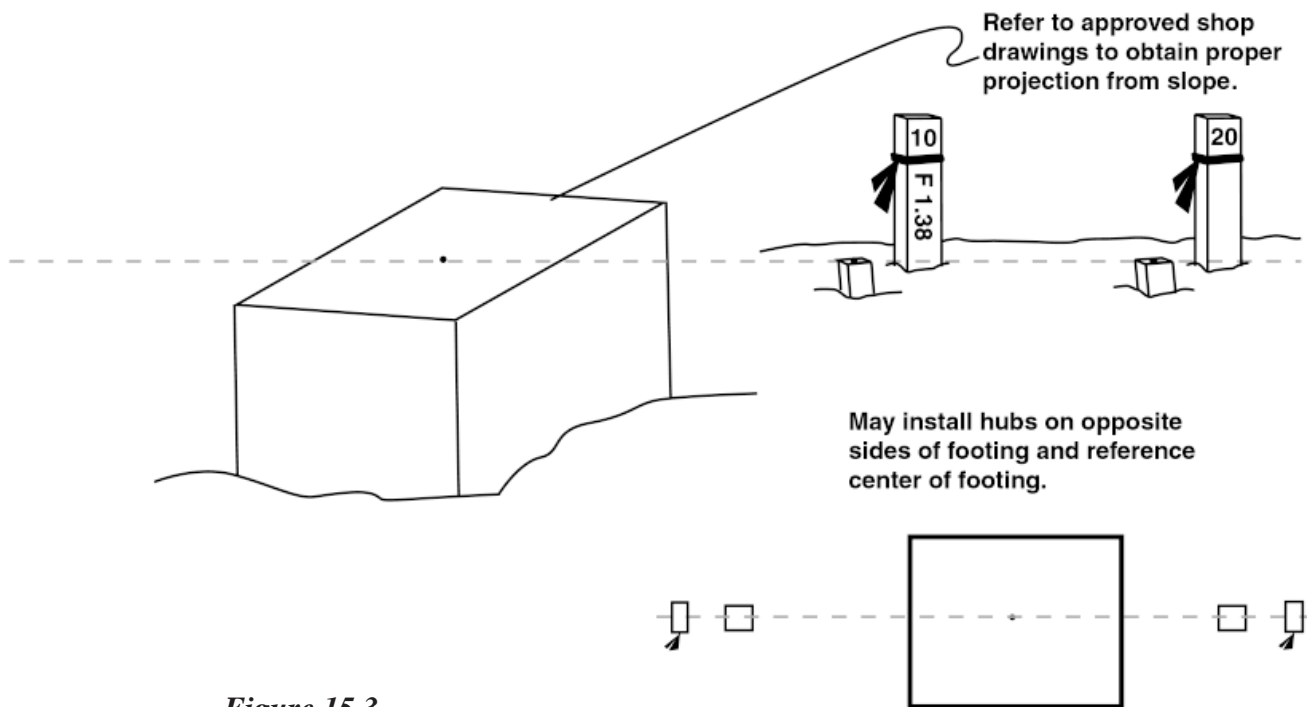


Figure 15.3

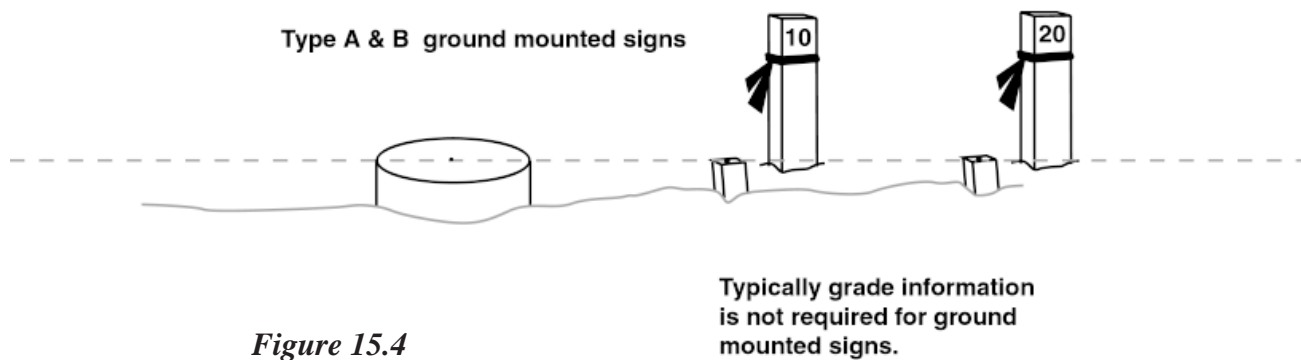


Figure 15.4

Type D, E and F Ground mounted signs

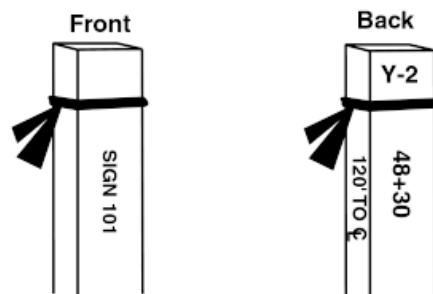


Figure 15.5

Sign Stakes

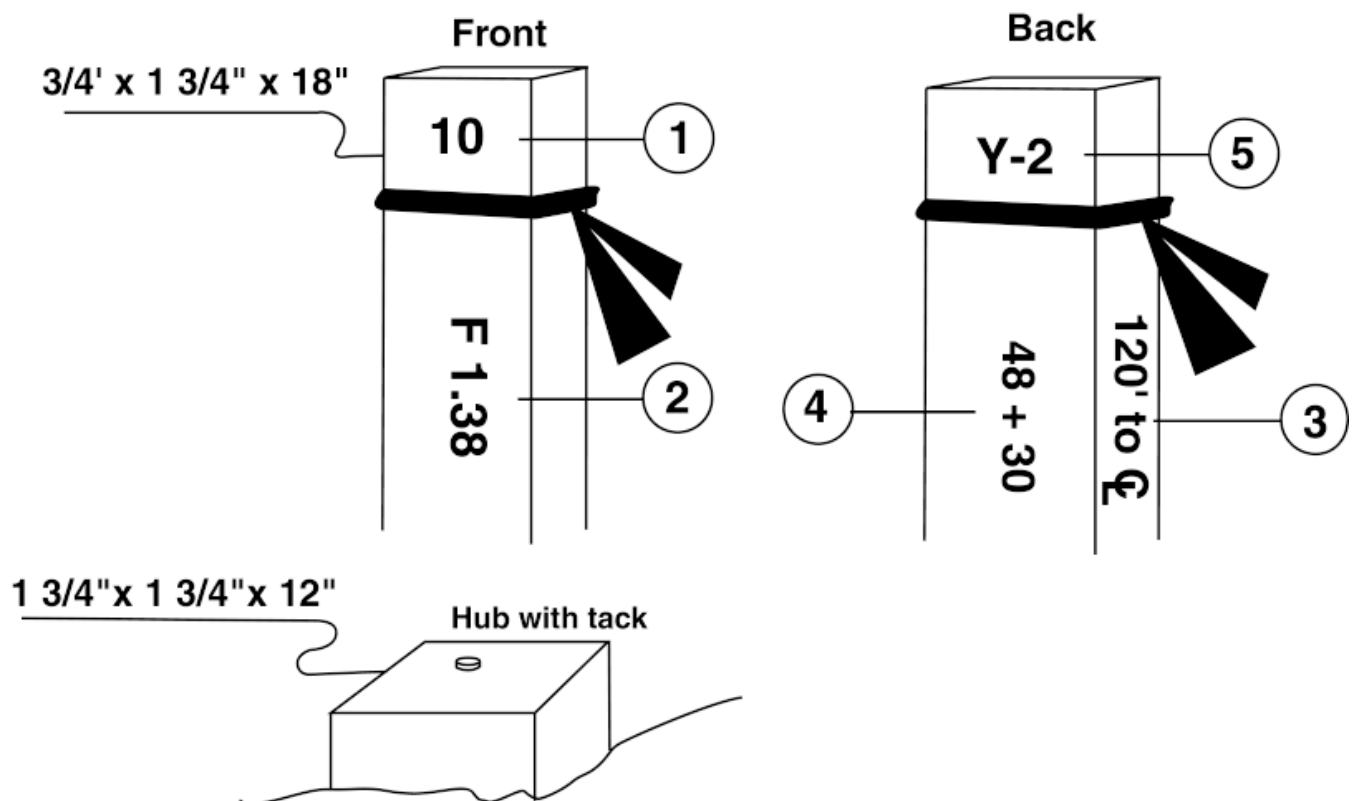


Figure 15.6



Chapter 16

Major Structure Stakes

16.1 Guideline Information

All major structures will be staked with reference lines which contain at least three (3) reference hubs on each side with tacks. These hubs should be spaced equally apart at adequate intervals. Reference hubs shall be checked for accuracy after sitting all winter. If two structures are side by side, then the reference hubs for each bridge should be color coordinated to eliminate confusion.

Bridge Stake Out

Bridge stake out will contain two reference lines for each end bent, interior bent, and the long chord line. (See *Figures 16.1a* and *16.1b*.) Set a minimum of one (1) temporary benchmark to remain in place throughout the entire bridge construction. One benchmark is to be used for substructure and one for superstructure.

Construction elevations are furnished from Structure Design for all bridges except cored slabs and should be used as follows:

Bottom of slab grades will be used to determine build ups at tenth points along each girder of each span. (See *Figure 16.2*.) The build up will be the difference between 1) the theoretical bottom of slab grade plus the dead load deflection due to weight of deck and rail, and 2) the actual in field elevation of the respective tenth point on each girder.

Overhang grades are given for every 4' interval along the lower outer most point of the proposed overhang. (See *Figure 16.3*.) These grades are given in respect to centerline stations. In order to correctly locate these overhang locations, a reference point on each of the proposed overhangs must be determined according to centerline station, from which the other overhang points can be laid off.

Header grades are given along the skew of the proposed header, to the finished top of slab grade. (See *Figure 16.4*.)

Drilled shafts should be staked only after bridge stake out is complete. Each drilled shaft should be referenced individually so that casing and reinforcing steel alignment can be checked during drilling and casting operations. Each drilled shaft stake out will contain two reference lines with two reference points on either side. If field conditions do not permit this type of referencing, then the Contractor should consult the Resident Engineer with a proposed method of referencing and receive approval.

Approach slab grades also are given to the finished slab grade. (See *Figure 16.4*.) It is important to check a point on the actual deck, at either end of the structure, which is relative to a given approach slab elevation in order to determine any necessary minor adjustment to the approach slab.

Culvert Stake Out

The grade that is provided on the structural plans is referenced to the centerline invert of the culvert. The length of the culvert should be checked to ensure that it intercepts the roadway slope properly. Culvert stake out will contain a reference line for the centerline of barrel and for each culvert headwall face. Each reference point should refer to the intersection point of the centerline of the barrel reference line and the face of the culvert headwall reference line. Grades set on the hubs referencing the face of the culvert headwall will be set in reference to the top of the headwall or curtain wall. Intermediate hubs for culverts over 100' in length will be set at even intervals no greater than 50'+/- apart or at the construction joints. (See *Figure 16.5*.) Grades set on the centerline offset hubs shall reference the proposed elevation of the culvert invert. For deep fills camber should be taken into consideration and compensated in accordance with the camber table detailed in the Appendix. Plan inverts should not be adjusted without consulting the Engineer due to environmental permit requirements.

Wall Stake Out

Noise walls, reinforced earth walls and retaining walls will be staked with a reference line to the face of the wall or as noted in the structure plans or as otherwise needed for construction. Existing ground elevations shown in the plans shall be verified for accuracy. For pile/panel type walls three (3) offsets shall be provided for each pile. All critical elevations shall be referenced, including, but not limited to, top of wall/coping, bottom of shaft/pile, etc.

16.2 Type of Stake

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 18"

Recommended Flagging: Color Coordinated

Precision: _____

Stake Use: Information

Recommended Stake Size: 1 $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 12"

Recommended Flagging: Color Coordinated

Precision: Horz. 0.01', Vert. 0.01'

Stake Use: Alignment and Grade

Recommended Stake Size: $\frac{3}{4}$ " x 1 $\frac{3}{4}$ " x 48"

Recommended Flagging: Color Coordinated

Precision: _____

Stake Use: Guard

TYPICAL BRIDGE - TANGENT SURVEY LAYOUT

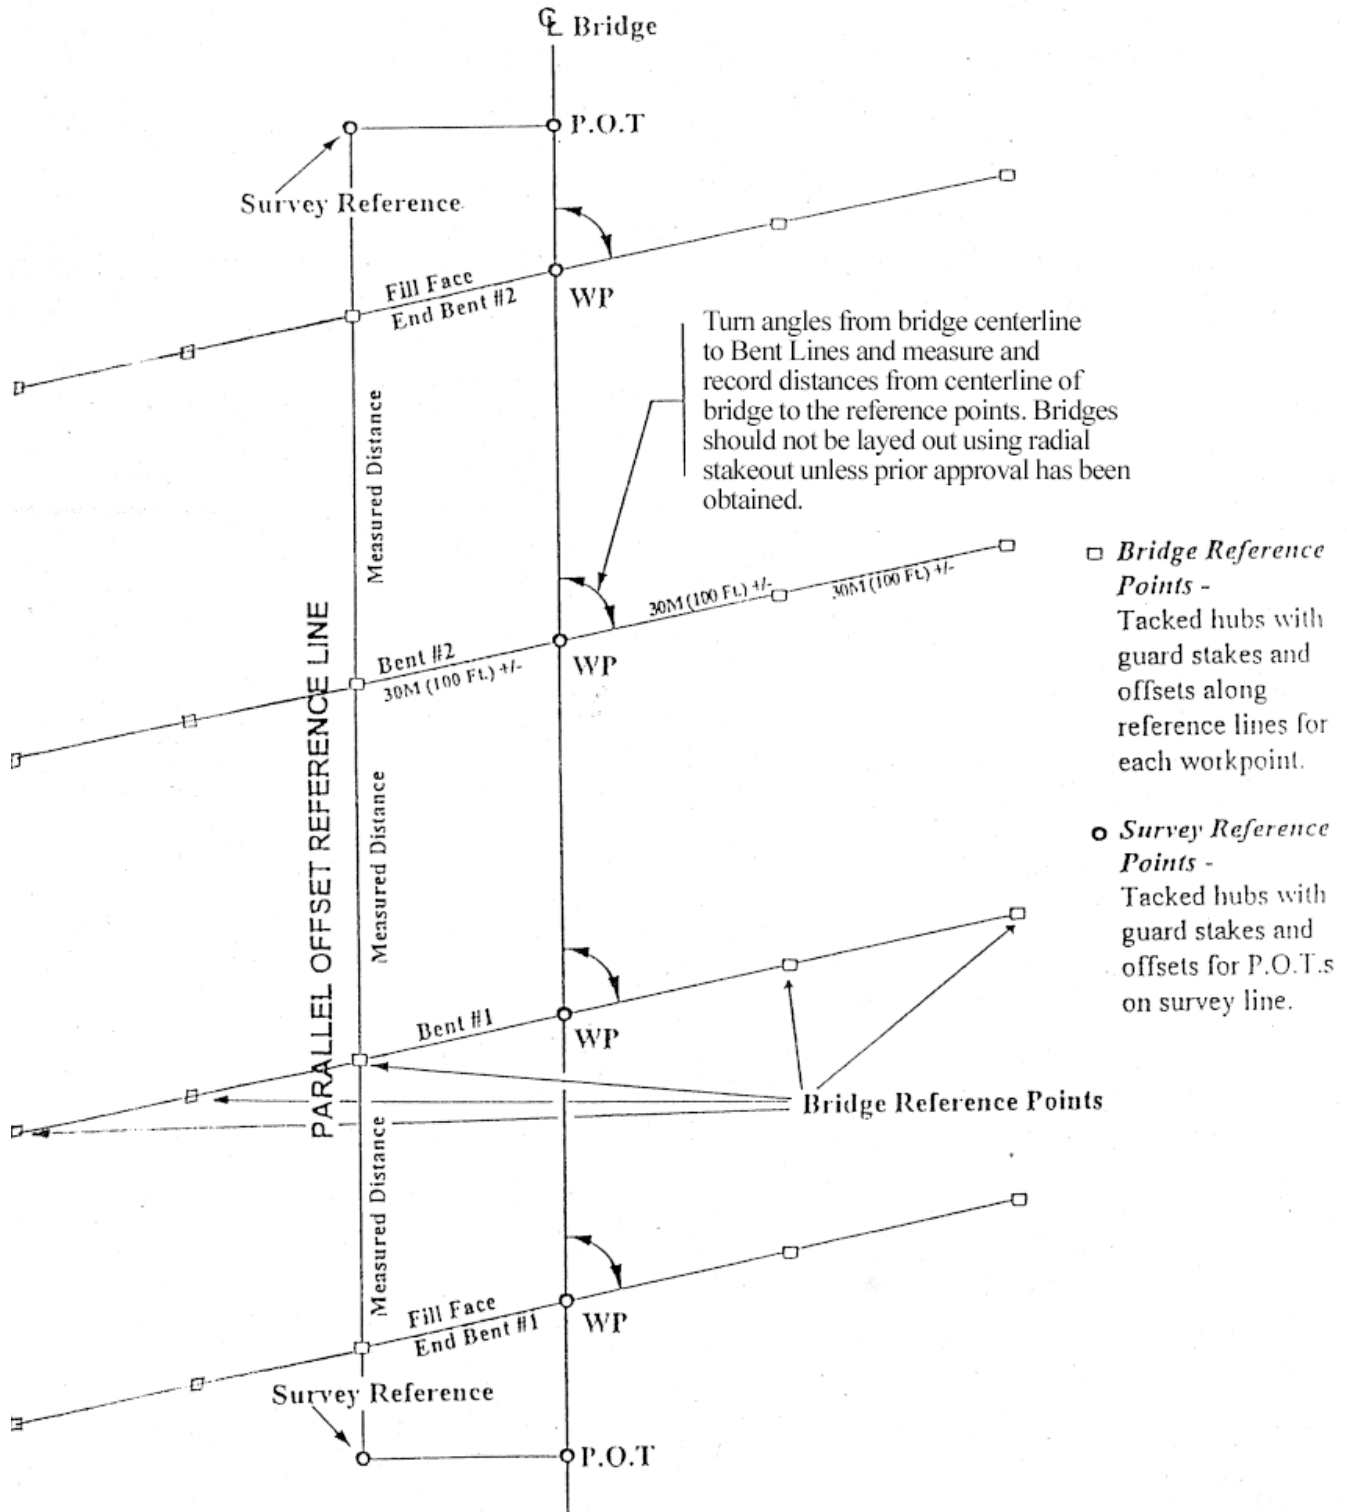


Figure 16.1a

TYPICAL BRIDGE - CURVE SURVEY LAYOUT


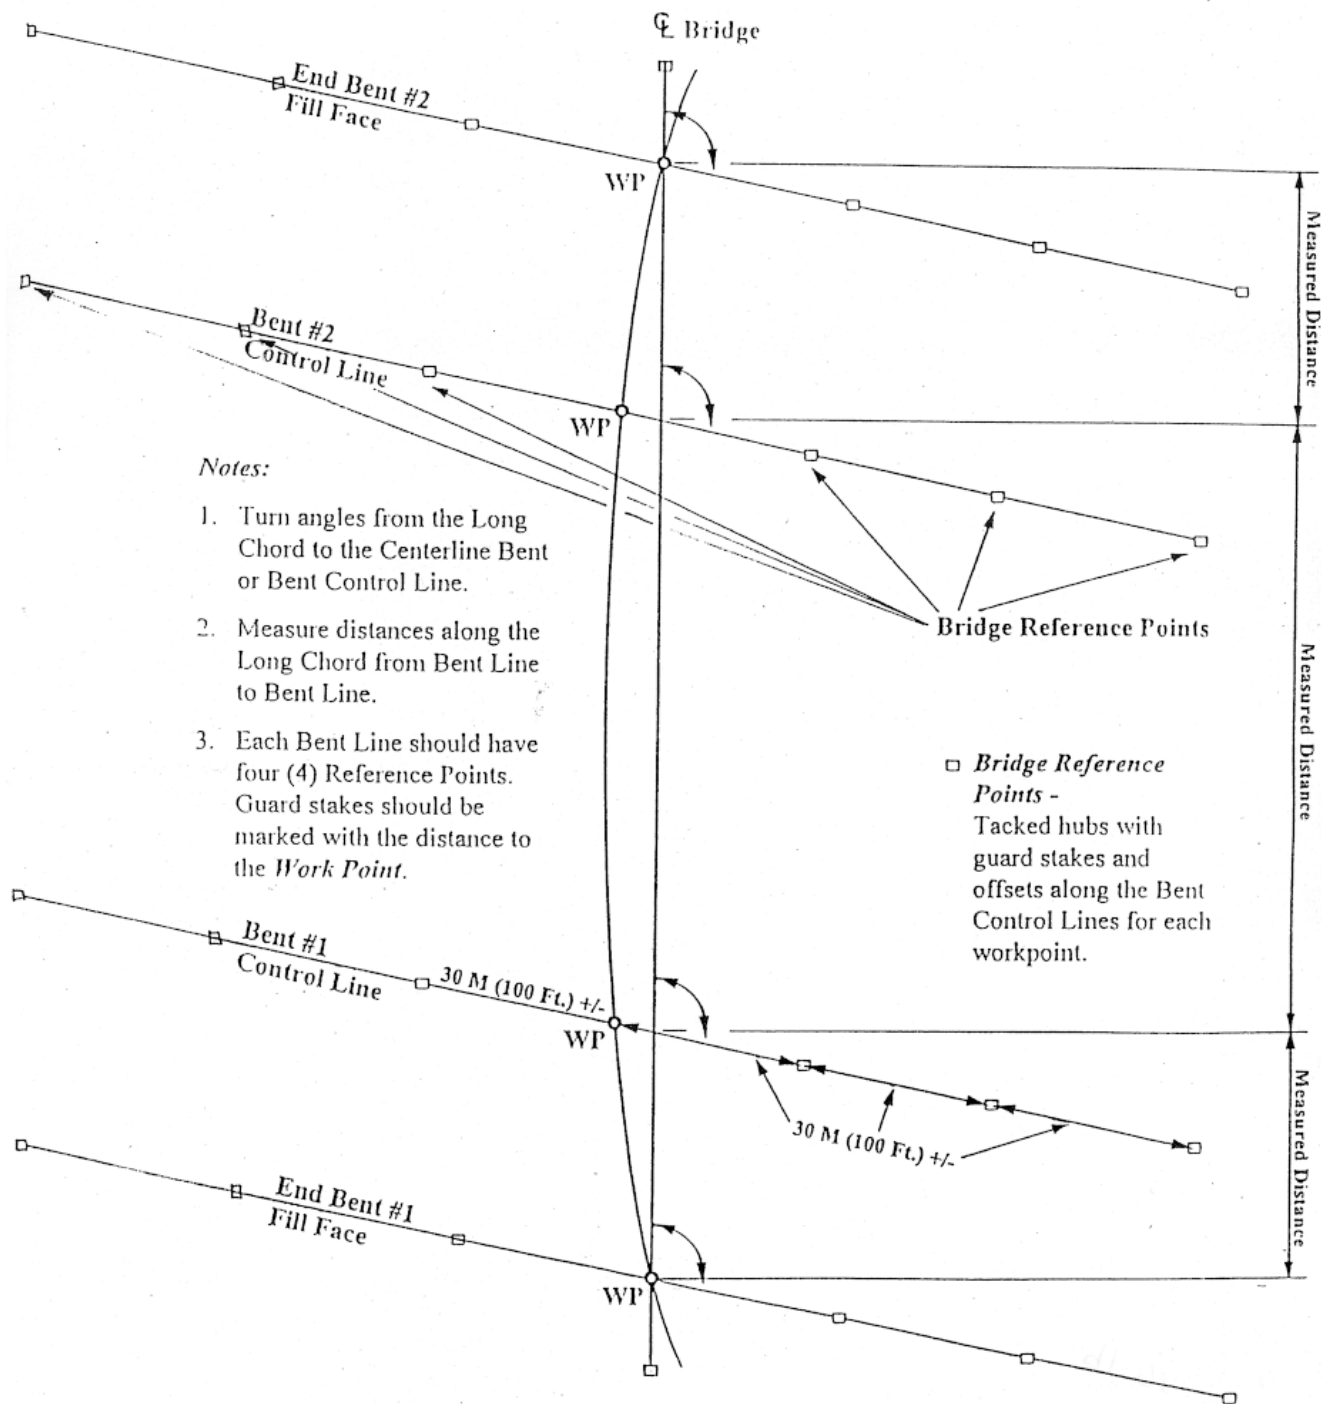


Figure 16.1b

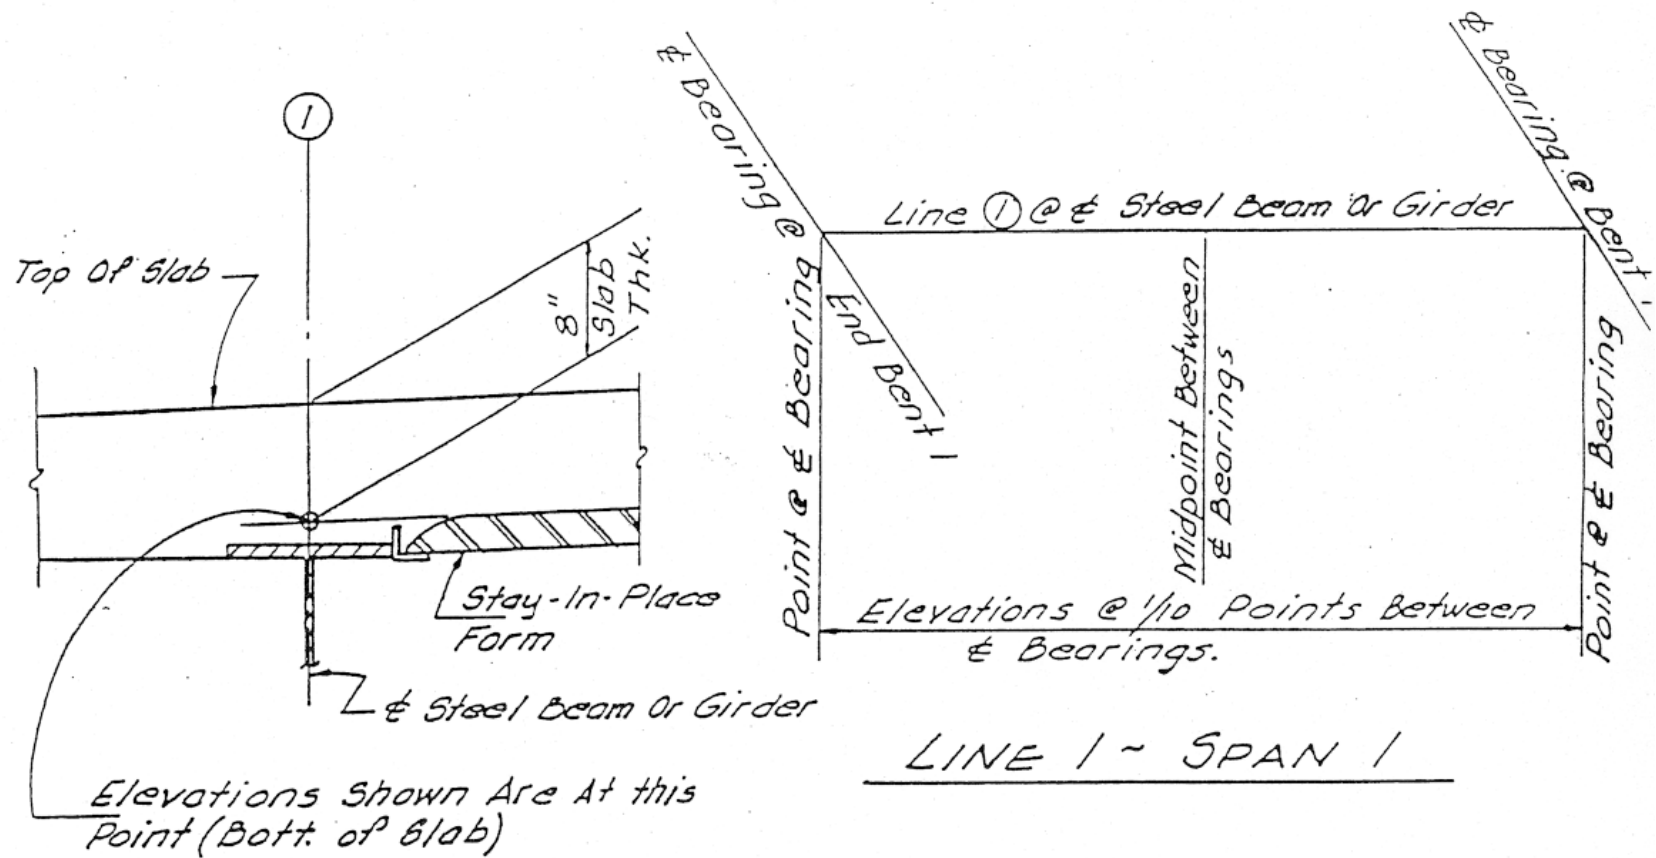

CONSTRUCTION ELEVATIONS
SPAN 1, BEAM 1 OR GIRDER 1 SHOWN
OTHER SPANS AND BEAMS OR GIRDERS SIMILAR

PROJECT No.: 8.1414607

COUNTY: DURHAM

STATION: 166+62.40 - L^{REV.}

ASSEMBLED BY D.B. SIMPSON, JR.

Figure 16.2


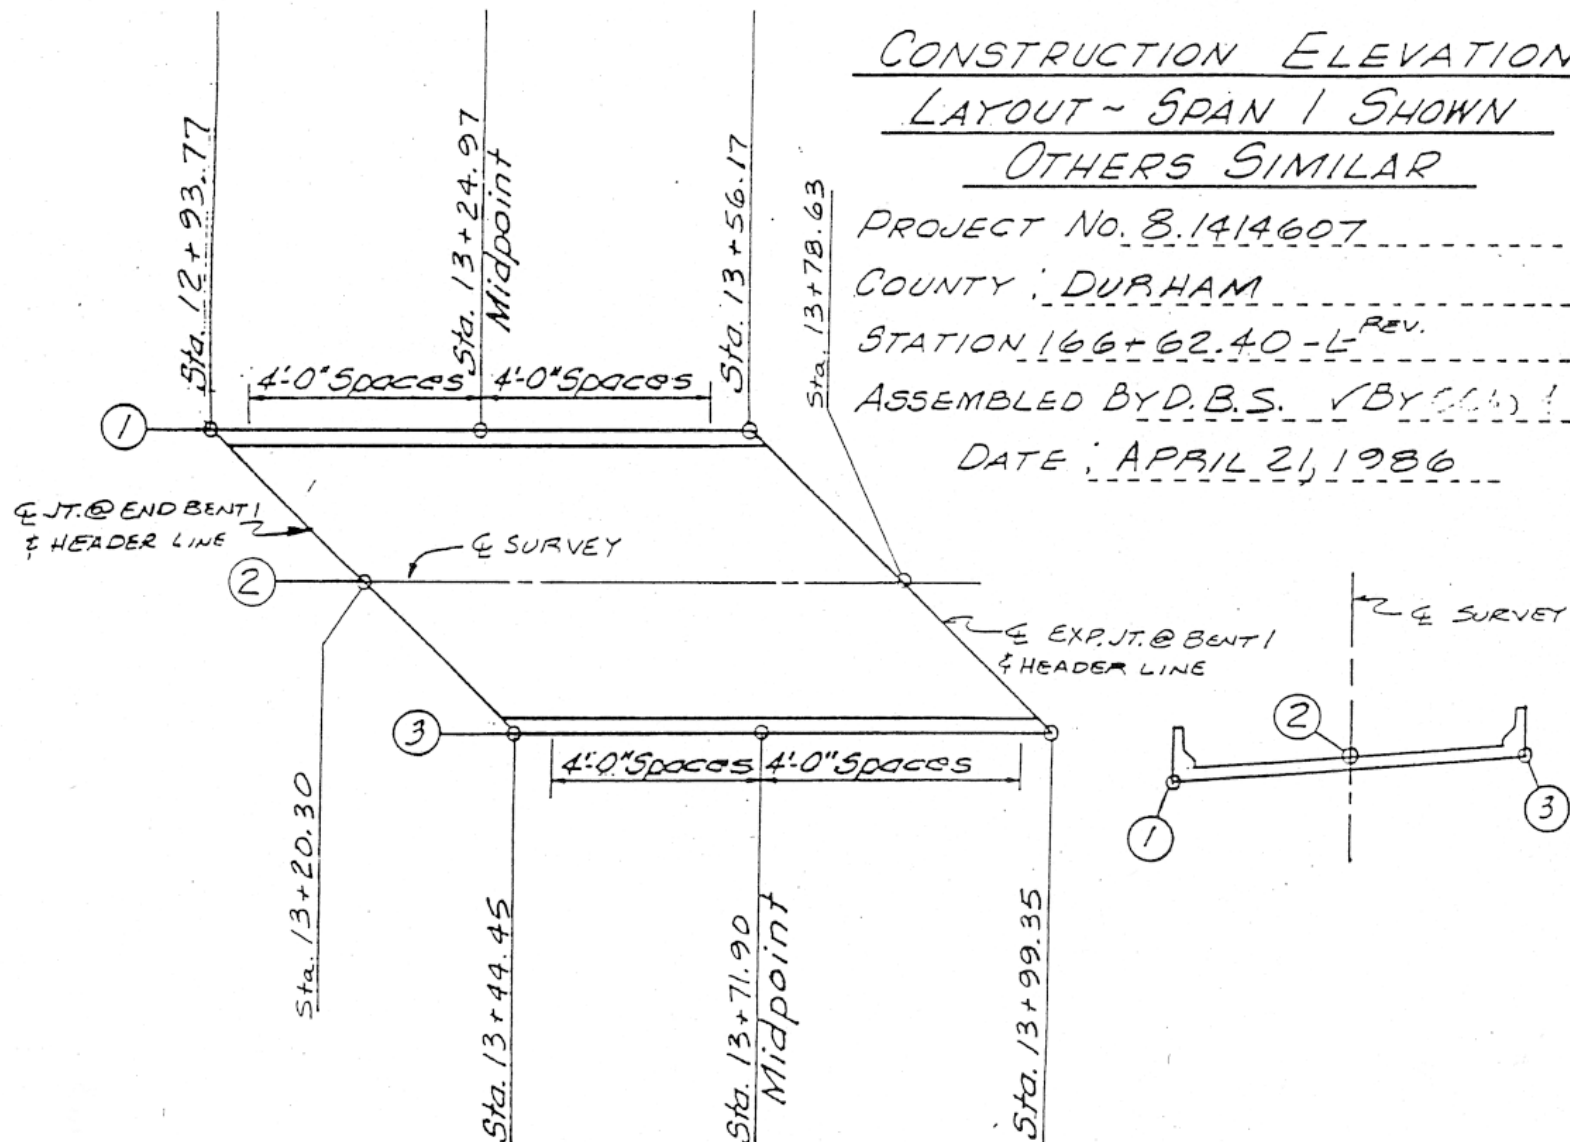


Figure 16.3

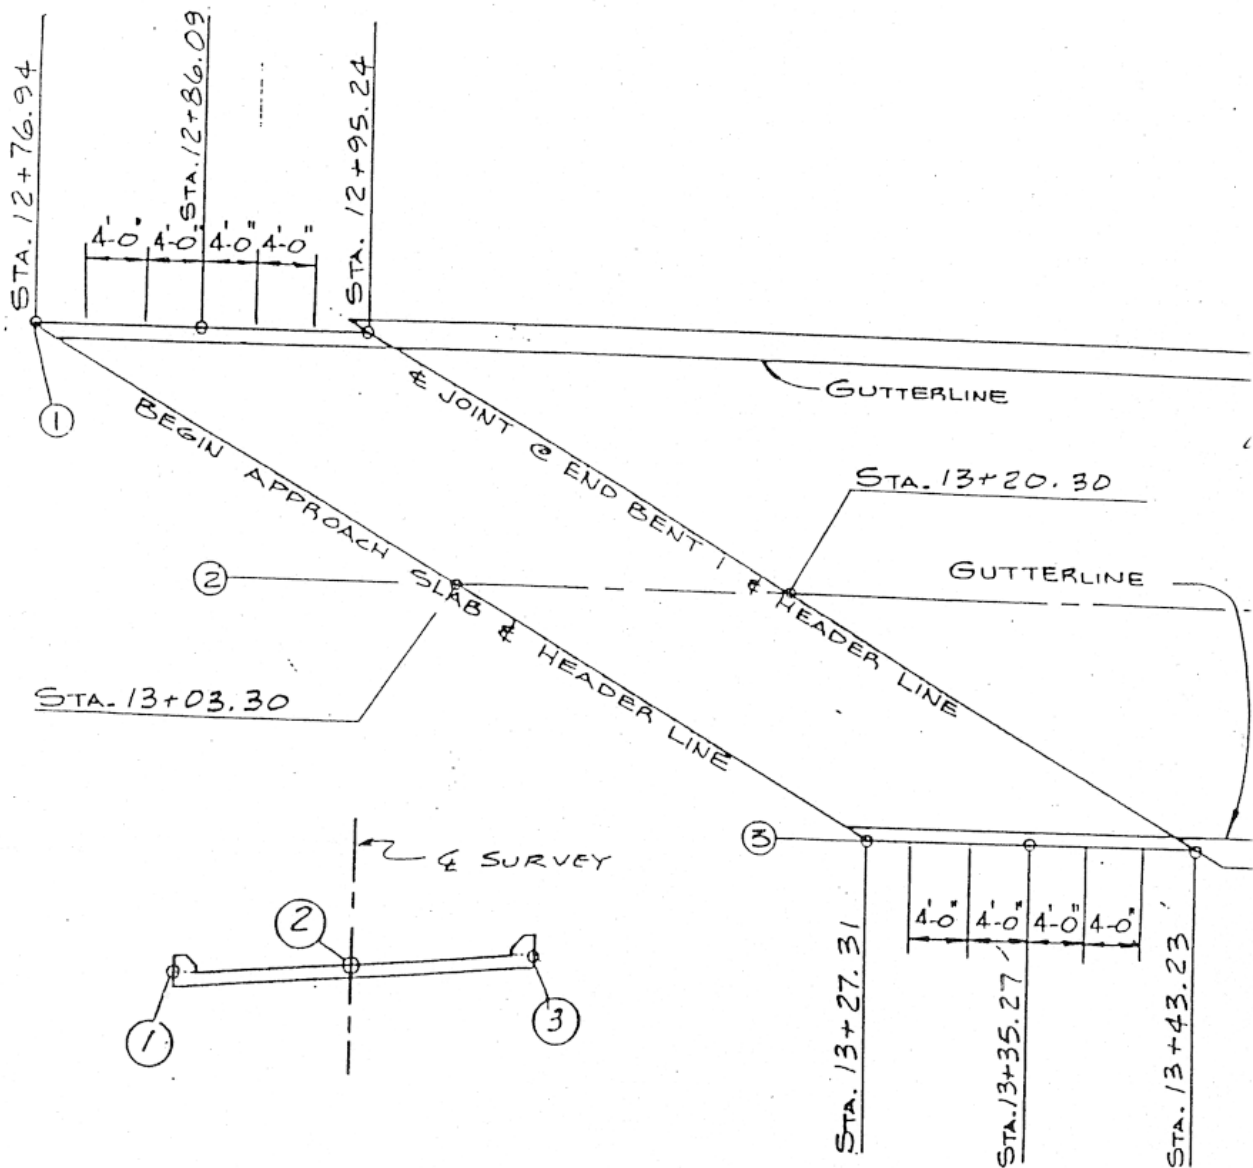

CONSTRUCTION ELEVATION LAYOUT
APPROACH SLAB AT BEGINNING OF BRIDGE
 (END OF BRIDGE SIMILAR)
 PROJECT No.: B.1414607 COUNTY: DURHAM
 STA.: 166+62.40-L-REV ASSEMBLED BY: D.B. SIMPSON, JR.
 DATE: APRIL 21, 1986 CHECKED BY: _____

Figure 16.4

TYPICAL REINFORCED CONCRETE BOX CULVERT SURVEY LAYOUT

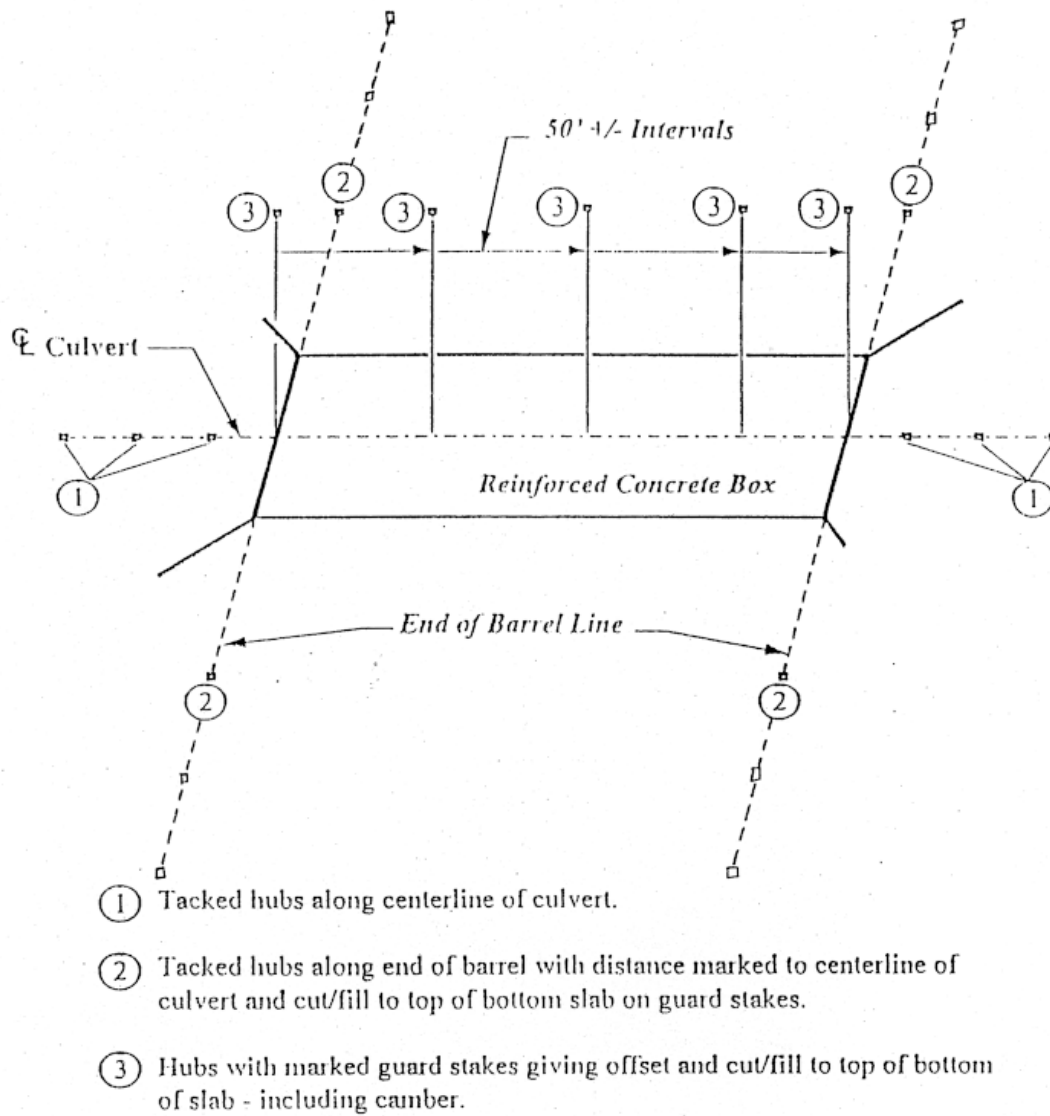


Figure 16.5



Chapter 17

Cross-sections for Earthwork Quantities

17.1 General Information

The Engineer may elect to obtain cross-sections by using either hand or aerial methods depending on the topography, vegetative cover, and size of the project or borrow sites. The Department often utilizes aerial photography to obtain cross-sections for calculation of earthwork quantities. Aerial photography requires the installation of photogrammetric control panels. Once panels are installed, the Photogrammetry Unit can orient the film both horizontally and vertically and obtain a correct scale.

17.2 Guideline Information

If the Engineer elects to hand section the project, set centerline stakes for all alignments on 50 foot (20 meter) intervals as detailed in Chapter 3. Offset alignments also may be required.

If the Engineer elects to obtain cross-sections by aerial methods, and a panel plan has not been provided, establish the survey line and install photogrammetric panels as detailed below:

Photogrammetric Control Panels

Either install photogrammetric panels on 5 foot x 5 foot sheets of black plastic or paint them on the roadway surface. An oil based exterior paint is recommended to mark the panel arrows. Panel arrows should have legs approximately 5 feet in length and six inches in width. (See *Figure 17.1.*) The point of the arrow represents the photogrammetric control point.

Photogrammetric panels should be oriented so that their arrows point towards increasing stations.

Horizontal Control Stakes and Panels

After the survey line has been established perform the following:

- Set centerline stakes for all alignments on 50 foot (20 meter) intervals as detailed in Chapter 3.
- Set panels at 300 foot (100 meter) intervals on alignments where construction occurs.
- Set additional panels at beginning and ending stations, all cardinal points, equalities and intersections of alignments. If a control point exceeds the 300 foot (100 meter) interval by less than 50 feet (15 meters), then place a panel only on the control point. The following control point will continue on the original 300 foot (100 meter) interval.

Vertical Control

Vertical control panels shall be set at the following locations:

- At 90° angles from each horizontal control panel, preferably on a level surface along the construction limits.
- Panels are to be numbered consecutively with odd numbers on the left side of the alignment and even numbers on the right side. The panel numbers should be painted on the top right hand corner of each panel.
- Each ramp, loop, -Y- line, and service road should have a separate alphabetic suffix. Panels should be labeled 1A, 2A, 1B, 2B, 1C, etc.
- When more than one flight is necessary, the panel numbers should be continued from the previous flight. The last station of the previous flight should be paneled again and the panels should be labeled with the number preceding your last panel flown.
Example: Flight 1 ended at Station 79+00, Panel number 13 on the left and 14 on the right. Flight 2 would begin at station 79+00, Panel number 15 on the left and 16 on the right.
- If the interchange does not exceed 1500 feet (500 meters) in width, then only one vertical control panel is necessary within each quadrant.
- If the interchange exceeds 1500 feet (300 meters) in width, then vertical control points should be installed on 300 foot (100 meter) intervals, as described herein.

Panel Field Book

Provide a panel book detailing the location of all horizontal and vertical control panels. Panels may be offset right or left due of traffic congestion or vegetative cover. However, do not exceed 50 feet (15 meters) from the original panel location. The offset distance must be noted in the panel book. The engineer will obtain the vertical elevations for each panel.

If the Engineer elects to obtain cross-sections by aerial methods, and a panel plan has been developed, the Engineer will provide the photogrammetric panel locations. The staking of the survey line is typically not required when setting photogrammetric panels at the predetermined locations. Set panels at these locations, and provide a panel book detailing the locations, coordinates and offsets if required.


The Engineer will obtain the vertical elevations for each panel.

Maintain the photogrammetric panels until a successful aerial photograph has been obtained. Photogrammetric panels must be clearly visible on the scheduled flight day.


17.3 Type of Stake

Panel Size: 60" x 60" sheet of black plastic with arrow
Precision: Horz. 0.01'
Stake Use: Location

AERIAL FLIGHT PANEL CONFIGURATION

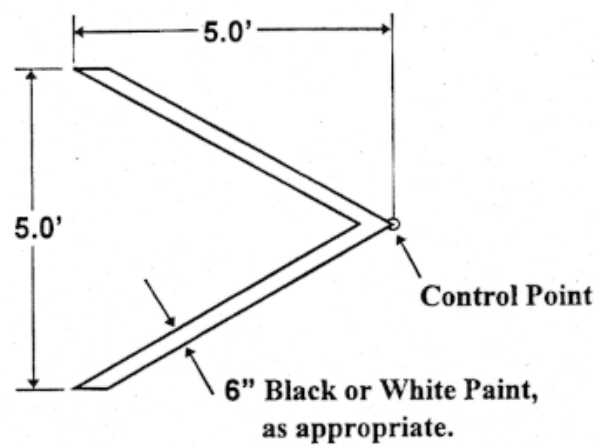


Typical configuration for asphalt or concrete surfaces.

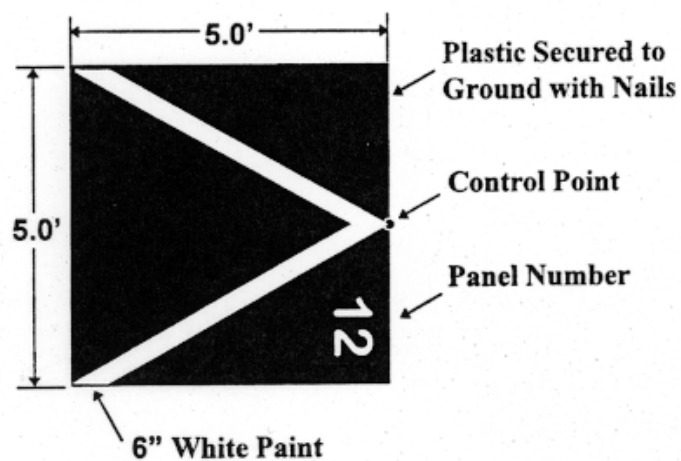

Typical configuration for earth or other surfaces.

Figure 17.1

Appendix

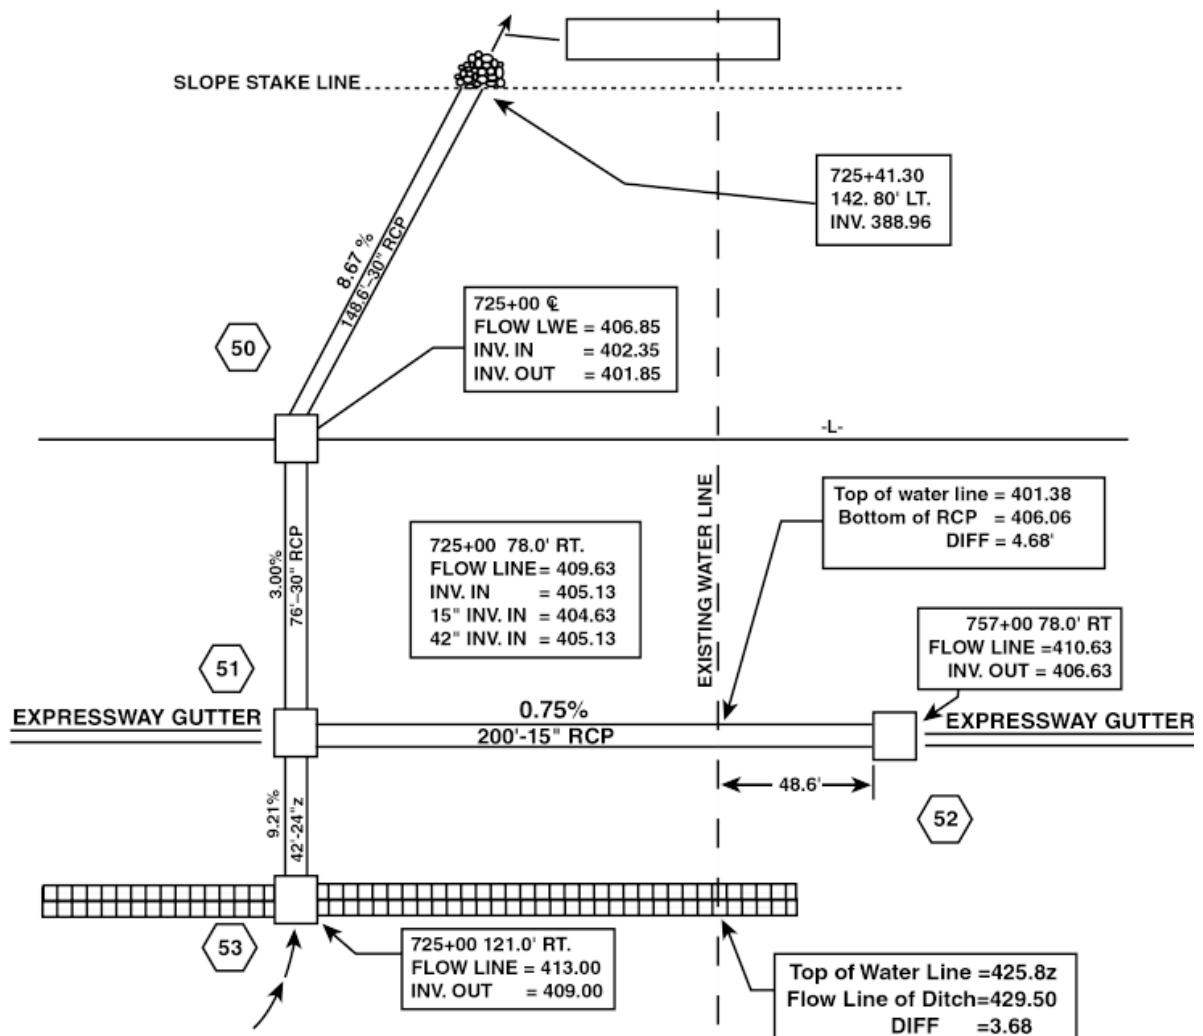

OUTLET PIPE

EXISTING STREAM	= 388.46
	+0.50
INV. OUT	= 388.96

142.80' LT. SLOPE STAKE
INTERCEPT POINT

	STR# 50	
GRADE POINT	GRADE =	410.35
TYPICAL	12' x .042 =	-0.50
		409.85
	18' x 0.167 =	-3.00
FLOW LINE OF GRATE	=	406.85
HEIGHT OF BOX	=	-5.00
INV. OUT	=	401.85
	+0.50	
INV. IN	=	402.35

<u>STR# 51</u>	
GRADE POINT GRADE =	410.35
12' x .021 =	<u>+0.24</u>
	410.59
26' x .021 =	<u>-0.54</u>
	410.05
10' x .042 =	<u>-0.42</u>
FLOW LINE OF GRATE =	409.63
	<u>-5.00</u>
INV. OUT =	404.63
	<u>+0.50</u>
INV. IN =	405.13

<u>STR# 52</u>	
GRADE POINT GRADE =	411.35
12' x 0.21 =	<u>+0.24</u>
	411.59
26' x .021 =	<u>-0.54</u>
	411.05
10' x .042 =	<u>-0.42</u>
FLOW LINE OF GRATE =	410.63
	<u>-4.00</u>
INV. OUT =	406.63

STR# 53
Flow line of ditch elevation
from cross sections at
STA. 725 + 00 121' RT.
is 413.00 after setting slope
stake using ditch detail "Q"
this elevation checks.

$$\begin{array}{r} \text{Flow line of grade} = 413.00 \\ -4.00 \\ \hline \text{INV. OUT} = 409.00 \end{array}$$

CHECKLIST FOR PIPE LAYOUT DRAWING SUBMITTALS

VERIFY THE FOLLOWING IS CONTAINED WITHIN YOUR LAYOUT DRAWING SUBMITTAL:

STRUCTURE NUMBER	_____
STATION AND DISTANCE FROM CENTERLINE	_____
SIZE OF PIPE	_____
PLAN INVERTS (IF PROVIDED)	_____
PROPOSED INVERT	_____
FLOW LINE AT GRATE	_____
ELBOW	_____
COLLAR	_____
CAMBER	_____
% GRADE OF PIPE	_____
EXPLANATION IF LENGTH OF PIPE VARIES FROM THE PLAN QUANTITY	_____
IS THERE A DITCH AT THE BEGINNING OR END OF PIPE?	_____
FIELD VERIFICATION OF DITCH LOCATION AND ELEVATION	_____
OR EXISTING DITCH LOCATION AND ELEVATION	_____
DOES PIPE EMPTY INTO CREEK?	_____
ELEVATION OF SHOT TAKEN IN EXISTING CREEK AT INTERVALS TO ENSURE DRAINAGE	_____
WAS THE TOE OF FILL AT THE CREEK INVESTIGATED?	_____
EXTRA DEPTH BOXES	_____
DETAIL THE EXTRA DEPTH DRAINAGE STRUCTURE SPECIFIED IN PLANS	_____
IF A DRAINAGE STRUCTURE IS NOT SHOWN ON PLANS, REASON FOR EXTRA DEPTH	_____
IS THERE A HEADWALL?	_____
PROVIDE DETAIL DRAWING NUMBER	_____
TOP OF HEADWALL ELEVATION	_____
INVERT ELEVATION	_____
SHOULDER ELEVATION	_____
SHOW SLOPE CONNECTION TO BACK OF HEADWALL	_____
DISTANCE FROM DIRT SHOULDER TO BACK OF HEADWALL	_____

CAMBER FOR PIPE AND BOX CULVERTS


When pipes or box culverts are founded on compressible material, camber should be placed in the grade to compensate for the settlement. The amount of camber to be used depends on the load imposed on the foundation material and the compressibility of the material. Since these factors vary, judgment is required in selecting the amount of camber to be used. Unless provided in the plans, the camber is determined as follows for pipe culverts.

The table below includes camber factors based on the load imposed (fill height) and the compressibility (soil type) of the material. Using the fill height and soil type, a corresponding factor is selected from the table. For continuous culverts beneath the entire width of the embankment, multiply the selected factor by the length of the culvert (L) to determine the midpoint camber.

CAMBER TABLE

Fill Height		Soil Type Factors		
(meters)	(feet)	medium	soft	very soft
0 to 3	0 to 10	0.0008	0.0013	0.0017
3 to 9	10 to 30	0.0017	0.0025	0.0033
9 to 15	30 to 50	0.0025	0.0038	0.0050

The mid point camber for pipe culverts shall be limited to one-half of the available fall in the pipe culvert or, $(L/2) \times (\% \text{ grade})$, where L is the length of the culvert in meters and shall be limited to 0.6 m (2 ft). The proposed grade for the culvert at the midpoint ($L/2$ from the end of the culvert) should be adjusted upward by C_m where C_m is the smaller of the calculated camber and the two limits stated above. The amount of camber (C_x) at any distance (x) along the length of the culvert that can be determined by $(C_m) (x / (L/2))$, where x is any distance along the length of the culvert L.



Example 1: Assume 75 m (246.1 ft) pipe culvert on 1.5 % grade under 8 m (26.2 ft) fill with soft foundation material.

Table Camber: factor = 0.0025 (no units), $L = 75 \text{ m}$ (246.1 ft)
 $75 \text{ m} \times 0.0025 = 0.1875 \text{ m}$ (0.615 ft)

Limit checks: $L = 75 \text{ m}$ (246.1 ft), % grade = 0.015
 $(75/2) \times 0.015 = 0.5625 \text{ m}$
 or $(246.1/2) \times 0.015 = 1.846 \text{ ft}$

Compare 0.1875 m to 0.5625 m.; therefore $C_m = 0.1875 \text{ m}$

Example 2: Assume 75 m (246.1 ft) pipe culvert on 0.4 % grade under 7.6 m (25 ft) fill with soft foundation material.

Table Camber: factor = 0.0025 (no units), $L = 75 \text{ m}$ (246.1 ft)
 $75 \text{ m} \times 0.0025 = 0.1875 \text{ m}$ (0.615 ft)

Limit checks: $L = 75 \text{ m}$ (246.1 ft), % grade = 0.004
 $(75/2) \times 0.004 = 0.15 \text{ m}$
 or $(246.1/2) \times 0.004 = 0.492 \text{ ft}$

Compare 0.1875 m to 0.15 m.; therefore $C_m = 0.15 \text{ m}$ (0.492 ft)

Example 3: For Example 1 above, determine the camber 10 m from the end of the culvert.

From Example 1: $L = 75 \text{ m}$, $C_m = 0.1875 \text{ m}$

$$\begin{aligned} C_x &= (C_m) (x / (L/2)) \\ &= (0.1875 \text{ m})(10 \text{ m}/(75 \text{ m}/2)) \\ &= 0.05 \text{ m} \end{aligned}$$

