

## NOTES

ASSUMED LIVE LOAD -----HS20-44 OR ALTERNATE LOADING.

DESIGN FILL-----

FOR OTHER DESIGN DATA AND NOTES SEE STANDARD NOTE SHEET.

3" Ø WEEP HOLES INDICATED TO BE IN ACCORDANCE WITH THE SPECIFICATIONS.

CONCRETE IN CULVERTS TO BE POURED IN THE FOLLOWING ORDER:

1. WING FOOTINGS AND FLOOR SLAB INCLUDING 4" OF ALL VERTICAL WALLS.
2. THE REMAINING PORTIONS OF THE WALLS AND WINGS FULL HEIGHT FOLLOWED BY ROOF SLAB AND HEADWALLS.

THE RESIDENT ENGINEER SHALL CHECK THE LENGTH OF CULVERT BEFORE STAKING IT OUT TO MAKE CERTAIN THAT IT WILL PROPERLY TAKE CARE OF THE FILL.

THIS BARREL STANDARD TO BE USED ONLY ON DOUBLE BARREL CULVERTS 8FT.  
OR OVER IN VERTICAL CLEARANCE ON 45° SKEW AND TO BE USED WITH  
STANDARD WING SHEET FOR THE SAME SKEW AND VERTICAL CLEARANCE.

DIMENSIONS FOR WING LAYOUT AS WELL AS ADDITIONAL REINFORCING STEEL EMBEDDED IN BARREL ARE SHOWN ON WING SHEET.

TRANSVERSE CONSTRUCTION JOINTS SHALL BE USED IN THE BARREL, SPACED TO LIMIT THE POURS TO A MAXIMUM OF 70 FT. LOCATION OF JOINTS SHALL BE SUBJECT TO APPROVAL OF THE ENGINEER.

STEEL IN THE BOTTOM SLAB MAY BE SPLICED AT THE PERMITTED CONSTRUCTION JOINT AT THE CONTRACTOR'S OPTION. EXTRA WEIGHT OF STEEL DUE TO THE SPLICES SHALL BE PAID FOR BY THE CONTRACTOR.

AT THE CONTRACTOR'S OPTION, HE MAY SPLICE THE VERTICAL REINFORCING STEEL IN THE INTERIOR FACE OF EXTERIOR WALL AND BOTH FACES OF INTERIOR WALLS ABOVE LOWER WALL CONSTRUCTION JOINT. THE SPLICE LENGTH SHALL BE AS PROVIDED IN THE SPLICE LENGTH CHART SHOWN ON THE PLANS. EXTRA WEIGHT OF STEEL DUE TO THE SPLICES SHALL BE PAID FOR BY THE CONTRACTOR.

AT THE CONTRACTOR'S OPTION HE MAY SUBMIT, TO THE ENGINEER FOR APPROVAL, DESIGN AND DETAIL DRAWINGS FOR A PRECAST REINFORCED CONCRETE BOX CULVERT IN LIEU OF THE CAST-IN-PLACE CULVERT SHOWN ON THE PLANS. THE DESIGN SHALL PROVIDE THE SAME SIZE AND NUMBER OF BARRELS AS USED ON THE CAST-IN-PLACE DESIGN. FOR OPTIONAL PRECAST REINFORCED CONCRETE BOX CULVERT, SEE SPECIAL PROVISIONS.

## TOTAL STRUCTURE QUANTITIES

CLASS A CONCRETE

BARREL @ _____	CY/FT _____	C.Y. _____
WING ETC. _____		C.Y. _____
TOTAL _____		C.Y. _____

REINFORCING STEEL	
BARREL _____	LBS.
WINGS ETC. _____	LBS.
TOTAL _____	LBS.

PROJECT NO. \_\_\_\_\_

— COUNTY

STATION: \_\_\_\_\_

STATE OF 1 OF 2

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH


BARREL STANDARD  
DOUBLE FT.X FT.  
CONC. BOX CULVERT WITH VERTICAL  
CLEARANCE OF 8 FT. OR MORE  
45° SKEW  
1990

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS
2			4			

STD. NO. CB52A

## LOCATION SKETCH


PROFILE ALONG  $\mathbb{C}$  CULVERT




BAR DIMENSIONS ARE OUT TO OUT

ADDED NOV. 90


ASSEMBLED BY : _____	DATE : _____	SPECIAL
CHECKED BY : _____	DATE : _____	
DRAWN BY : <u>D.P.DONOVAN</u>	DATE : <u>DEC.1989</u>	STANDARD
CHECKED BY : <u>E.L. ROSE</u>	DATE : <u>NOV. 90</u>	

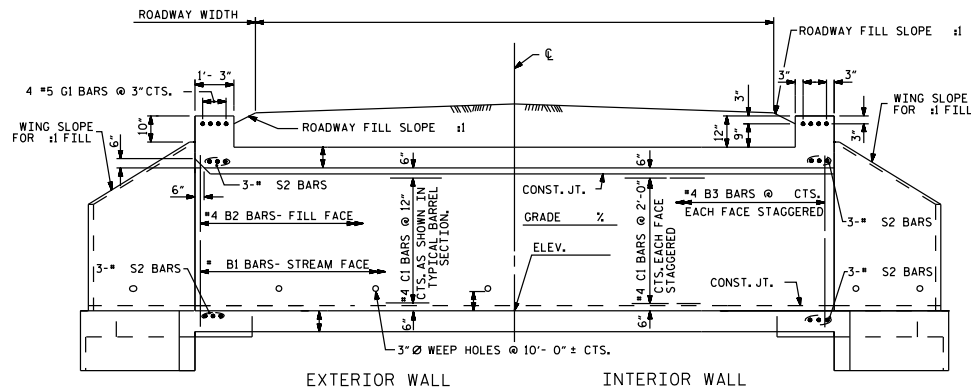

EXTERIOR WALL INTERIOR WALL  
CULVERT SECTION NORMAL TO ROADWAY

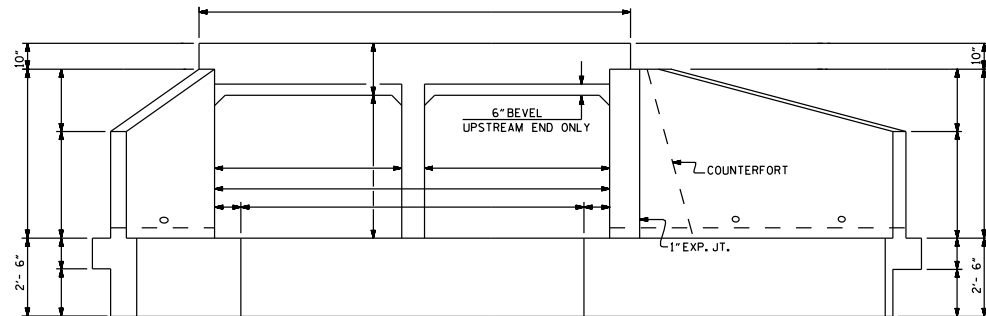


END ELEVATION NORMAL TO SKEW

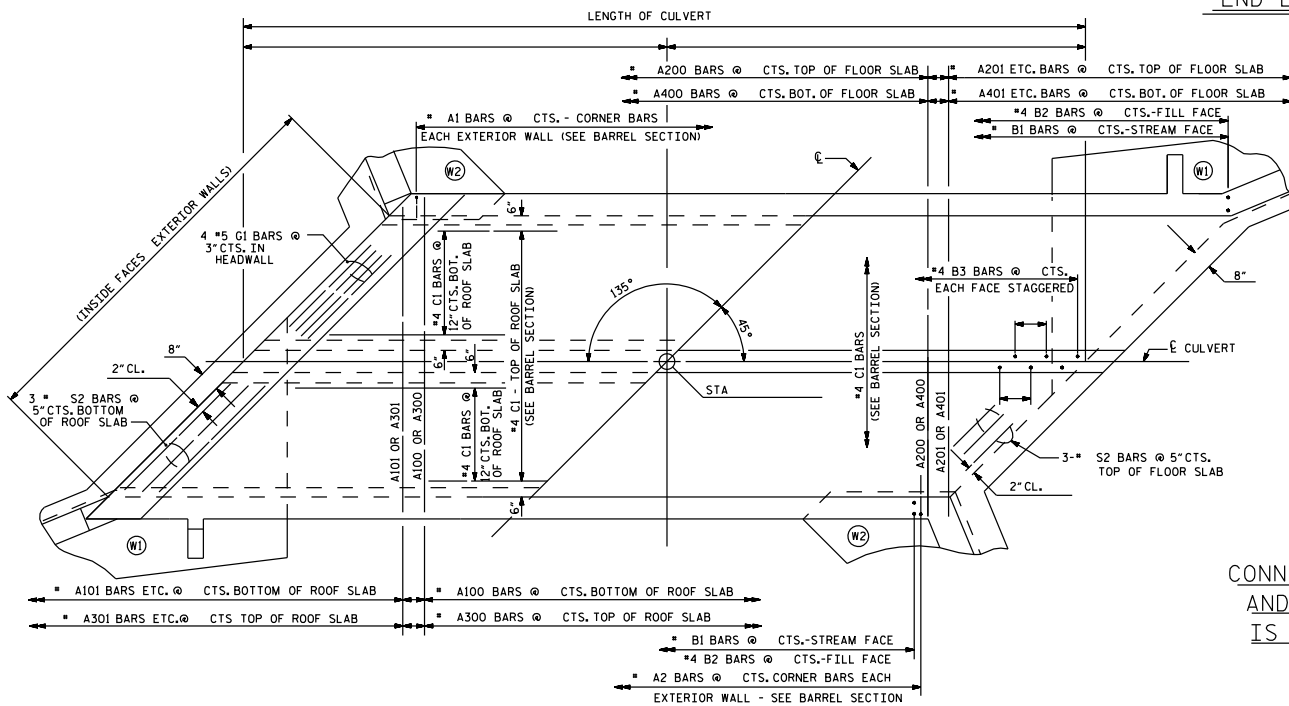


PART PLAN - ROOF SLAB

PART PLAN - FLOOR SLAB

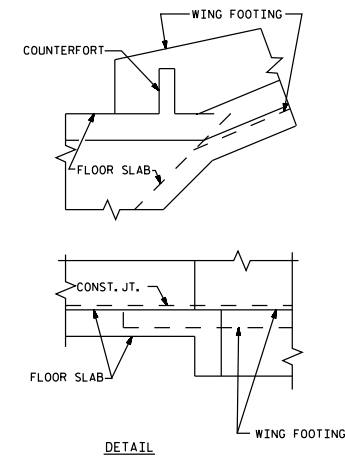

CONNECTION OF WING FOOTING  
AND FLOOR SLAB WHEN SLAB  
IS THICKER THAN FOOTING



SKEW TRIANGLE

PROJECT NO. \_\_\_\_\_

COUNTY \_\_\_\_\_

STATION: \_\_\_\_\_

SHEET 2 OF 2

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
BARREL STANDARD  
DOUBLE FT. X FT.  
CONC. BOX CULVERT WITH VERTICAL  
CLEARANCE OF 8 FT. OR MORE  
45° SKEW  
1972

REVISIONS				SHEET NO.	
NO.	BY	DATE	NO.	BY	DATE
1			3		
2			4		
				TOTAL SHEETS	

STD. NO. CB52

ASSEMBLED BY : _____	DATE : _____	SPECIAL STANDARD
CHECKED BY : _____	DATE : _____	
DRAWN BY : DANNY SHERROD	DATE : 4-72	
CHECKED BY : HASON A. JUDEN	DATE : 4-72	