

ANNUAL REPORT FOR 2006



Shoe Heel Creek Mitigation Site
Robeson County
TIP No. B-4248



Prepared By:
Natural Environment Unit & Roadside Environmental Unit
North Carolina Department of Transportation
December 2006

TABLE OF CONTENTS

SUMMARY	1
1.0 Introduction	2
.1 Project Description	2
.2 Purpose	2
.3 Project History	2
2.0 Vegetation:	3
.1 Success Criteria	3
.2 Description of Species.....	3
.3 Results of Vegetation Monitoring	3
.4 Conclusions.	3
3.0 Overall Conclusions and Recommendations	3

FIGURES

Figure 1 – Site Location Map	4
------------------------------------	---

APPENDICES

Appendix A – Site Photos	5
--------------------------------	---

SUMMARY

The Shoe Heel Creek Mitigation Site is located in Robeson County. The site was planted in March 2006 and was designed as mitigation for wetland impacts associated with bridge project B-4248.

The mitigation encompasses approximately 0.16 acres of wetland restoration. The restoration effort involved the removal of the old existing roadway fill and monitoring the area to ensure that it re-attains wetland jurisdictional status. No hydrologic monitoring is required for this project; however, vegetation monitoring is required for three years.

Site grading was adjusted slightly after meeting with the Army Corp. of Engineers. The adjustment was made to preserve mature baldcypress trees located onsite.

After the first year of monitoring, the Shoe Heel Creek site shows by visual observation that the planted species are surviving and that the impacted area is re-attaining wetland jurisdictional status.

NCDOT proposes to continue vegetation monitoring of this site.

1.0 INTRODUCTION

1.1 Project Description

The Shoe Heel Creek Mitigation site is located at Bridge No. 170 on SR 1101 (Figure 1). The site consists of approximately 0.16 acres of mitigation for wetland impacts associated with project B-4248.

1.2 Purpose

In order for a mitigation site to be considered successful, a site must meet vegetation success criteria. This report details the vegetation monitoring in 2006 at the Shoe Heel Creek Mitigation Site. Hydrologic monitoring was not required for the site.

1.3 Project History

March 2006	Site planted
July 2006	Vegetation Monitoring (1 year)

2.0 VEGETATION: SHOE HEEL CREEK MITIGATION SITE (YEAR 1 MONITORING)

2.1 Success Criteria

Success Criteria states that the impacted area where the old existing roadway fill was removed shall be replanted using native species and must re-attain wetland jurisdictional status at the end of three years.

2.2 Description of Species

The following wetland species were planted in the Wetland Restoration Area:

Taxodium distichum, Baldcypress

Nyssa sylvatica var. *biflora*, Swamp Blackgum

2.3 Results of Vegetation Monitoring

The impacted area where the old existing roadway fill was removed and revegetated is re-attaining wetland jurisdictional status and the planted species are surviving.

Site Notes: Other species noted include: ragweed, cattails, *Scirpus* sp., *Juncus* sp., and various grasses.

2.4 Conclusions

There were approximately 0.16 acres of wetland restoration planted on site. There were no plots established on the site. By visual observation the Shoe Heel Creek site shows that the planted species are surviving and that the impacted area is re-attaining wetland jurisdictional status.

3.0 Overall Conclusions and Recommendations

NCDOT proposes to continue vegetation monitoring at the Shoe Heel Creek Site.

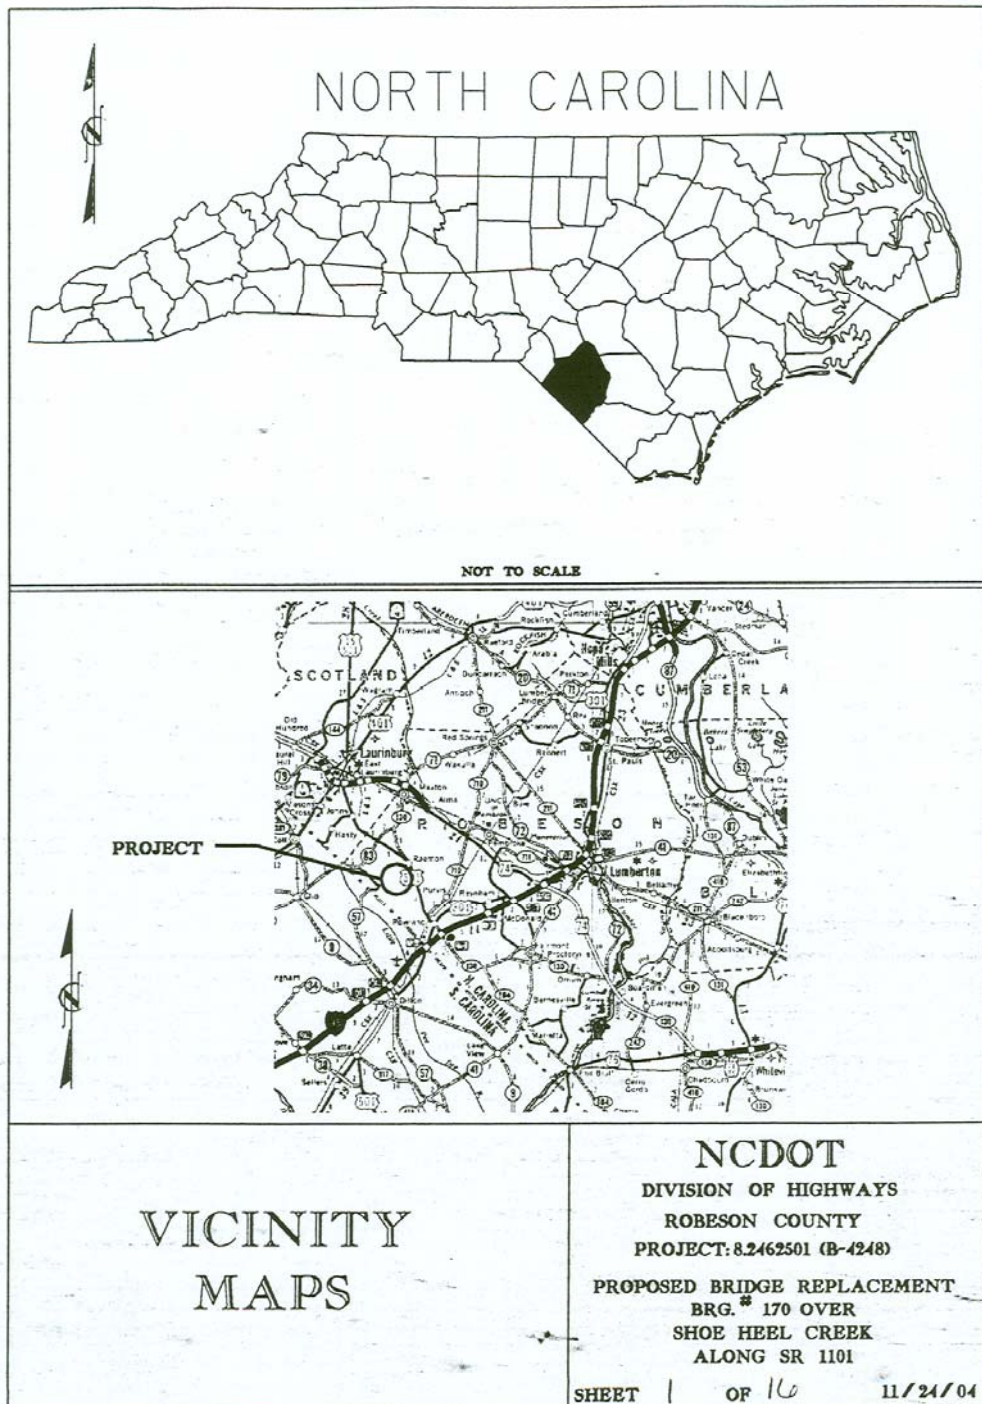


Figure 1

APPENDIX A

SITE PHOTOS

Shoe Heel Creek



Photo 1



Photo 2