I-85 Improvements

Railroad Bridge (Norfolk Southern)

STIP Project Nos. I-5719/U-3608/U-5800 | Gaston County

Bridge 350132

Initial Option

Replace in Place

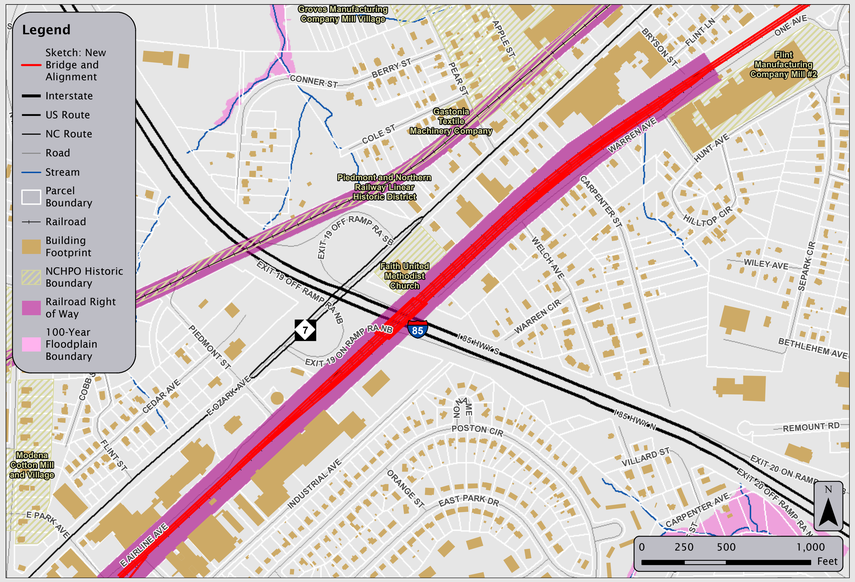

- Phased construction of this bridge is required and would require temporary closure of three of the five tracks along the Norfolk Southern Railroad during construction. Two mainline tracks would be retained at all times during construction.
- All required work should occur within the existing railroad right-of-way. Property impacts not anticipated.
- May require closing the inner two lanes of I-85 and leaving the outer lanes open during construction.

Concept Recommended for Further Study

Replace in Place